



中国认可
国际互认
检测
TESTING
CNAS L4065



Report No.:
报告编号: GZLS20160430U01

检 验 报 告

TEST REPORT

NAME OF SAMPLE: Rechargeable Li-ion Battery

产品名称: 可充电锂离子电池

CLIENT: LEUNG'S COMMUNICATION&ELECTRICPRODUCTS
(GUANGZHOU) LTD

委托单位: 广州梁氏通讯电器有限公司

CLASSIFICATION OF TEST: Commission test

检验类别: 委托检测

广州邦禾检测技术有限公司

Guangzhou MCM Certification and Testing Co., Ltd



General information 基本资料	
Name of samples 样品名称	Rechargeable Li-ion Battery 可充电锂离子电池
Type/ Model 型号规格	BT-000314-01 3,6V 4530mAh 16,31Wh(typ) 4270mAh 15,37Wh(min)
Trade mark 商标	—
Commission by 委托单位	LEUNG'S COMMUNICATION & ELECTRIC PRODUCTS(GUANGZHOU)LTD 广州梁氏通讯电器有限公司
Commissioner address 委托单位地址	No.39 Nanyunsan Road, Science Park, Hi-Tech Industrial Development Zone, Guangzhou 广州市高新技术产业开发区科学城南云三路 39 号
Manufacturer 制造商	LEUNG'S COMMUNICATION & ELECTRIC PRODUCTS(GUANGZHOU)LTD 广州梁氏通讯电器有限公司
Manufacturer address 制造商地址	No.39 Nanyunsan Road, Science Park, Hi-Tech Industrial Development Zone, Guangzhou 广州市高新技术产业开发区科学城南云三路 39 号
Factory 生产厂	LEUNG'S COMMUNICATION & ELECTRIC PRODUCTS(GUANGZHOU)LTD 广州梁氏通讯电器有限公司
Factory address 生产厂地址	No.39 Nanyunsan Road, Science Park, Hi-Tech Industrial Development Zone, Guangzhou 广州市高新技术产业开发区科学城南云三路 39 号
Appearance: 样品外观颜色	Black 黑色
Sample status 样品状态	Good 完好
Package of goods 样品外包装	Carton 纸箱
Quantity of sample 样品数量	43pcs
Sample identification 样品标识序号	c1#~c43#
Reference standard 参考标准	MH/T1052-2013 《Tests for lithium batteries transported by air》 MH/T1052-2013 《航空运输锂电池测试规范》
Receiving date 接样日期	2016.04.30
Completing date 完成日期	2016.05.23

Test Conclusion 测试结论					
No.序号	Name of test 测试项目名称	Testing standard 测试标准	Test result 测试结果	Conclusion 本项结论	Remarks 备注
1	Altitude simulation 高度模拟	UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.5, amend.2, 38.3. 联合国《关于危险货物运输的建议书试验和标准手册》ST/SG/AC. 10/11/ Rev. 5, amend. 2 38. 3.	See Appendix 1 见 附表 1	Passed 合格	/
2	Thermal test 温度试验		See Appendix 2 见 附表 2	Passed 合格	/
3	Vibration 振动		See Appendix 3 见 附表 3	Passed 合格	/
4	Shock 冲击		See Appendix 4 见 附表 4	Passed 合格	/
5	External Short-circuit 外部短路		See Appendix 5 见 附表 5	Passed 合格	/
6	Impact 撞击		/	/	N/A 不适用
	Crush 挤压		See Appendix 6 见 附表 6	Passed 合格	/
7	Overcharge 过度充电		See Appendix 7 见 附表 7	Passed 合格	/
8	Forced discharge 强制放电	See Appendix 8 见 附表 8	Passed 合格	/	

Conclusion/结论:

The Rechargeable Li-ion Battery submitted by LEUNG'S COMMUNICATION & ELECTRIC PRODUCTS(GUANGZHOU)LTD had passed the test items of UNITED NATIONS "Recommendations on the Transport of Dangerous Goods, Manual of Test and Criteria ST/SG/AC, 10/11/Rev.5 amend.2, 38.3.


由广州梁氏通讯电器有限公司送检的可充电锂离子电池符合联合国《关于危险货物运输的建议书 试验和标准手册》ST/SG/AC, 10/11/Rev. 5 amend. 2, 38. 3 的要求。

Seal/公章: 

Date of issue:/日期: May. 25, 2016


Approver: Liang Hongcheng

批准:




Checker: Fu Ziwen

审核:




Tester: Zhi Juncai

测试:



Photos of samples and markings
样品及标识照片

Battery (BT-000314-01 3,6V 4530mAh 16,31Wh(typ) 4270mAh 15,37Wh(min))

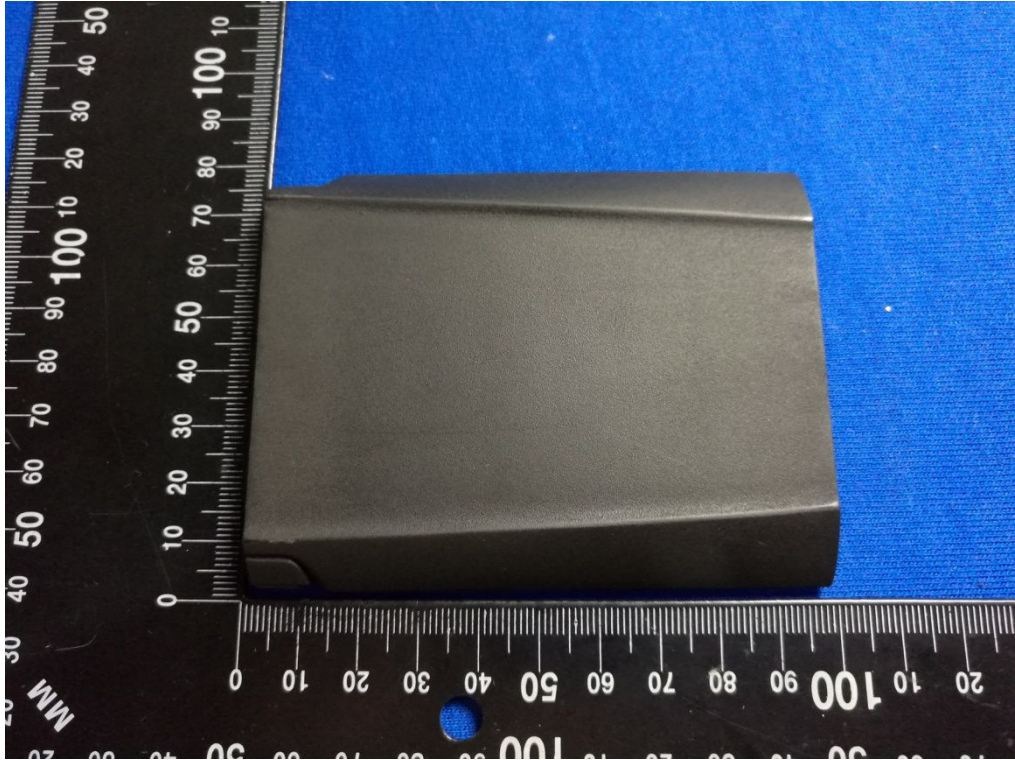

Appendix 5

附表 5

Test Items 测试项目	External short circuit 外部短路		
1,1	Test procedure 测试步骤		
	The cell or battery to be tested shall be temperature stabilized so that its external case temperature reaches $55\pm 2^{\circ}\text{C}$ and then the cell or battery shall be subjected to a short circuit condition with a total external resistance of less than 0,1 ohm at $55\pm 2^{\circ}\text{C}$, This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to $55\pm 2^{\circ}\text{C}$, the cell or battery must be observed for a further six hour for the test to be concluded. 保持试验环境温度稳定在 $55\pm 2^{\circ}\text{C}$，以使电芯或电池样品外表温度达到 $55\pm 2^{\circ}\text{C}$，然后，在此温度下，将其正负极用小于 0,1 欧姆的线路短接，待电芯或电池的外表温度恢复到 $55\pm 2^{\circ}\text{C}$ 之后再持续 1 小时以上，对电芯或电池必须进一步观察 6 个小时才能下结论。		
1,2	Sample status 样品状态		
	C1#~C10#, at first cycle in fully charged states; C1#~C10#, 在第一个循环完全充电状态;		
1,3	Result 测试结果		
Sample No. 样品编号	Max. External Temperature 样品表面最高温度 ($^{\circ}\text{C}$)	Test result 测试结果	Remark 备注
C1#	55,7	O	/
C2#	55,5	O	/
C3#	55,3	O	/
C4#	55,1	O	/
C5#	55,6	O	/
C6#	55,5	O	/
C7#	56,2	O	/
C8#	55,1	O	/
C9#	55,8	O	/
C10#	55,4	O	/
Note: D -Disassembly, R -Rupture, F -Fire, O - no disassembly, no rupture, no fire. 注: D- 解体; R- 破裂; F - 起火; O-无解体、无破裂、无起火。			

Appendix 6

附表 6

Test Items 测试项目	Crush 挤压		
1,1	Test procedure 测试步骤		
	A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1,5cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached. (a) The applied force reaches 13kN±0,78kN; (b) The voltage of the cell drops by at least 100 mV; or (c) The cell is deformed by 50% or more of its original thickness. Once the maximum pressure has been obtained, the voltage drops by 100mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released. 电池芯或组成电池芯在两个平面间挤压。挤压在第一个接触点以约 1, 5cm/s 的速度慢慢进行，直到下面三个选项之一达到为止： (a) 作用力达到 13kN±0, 78kN; (b) 电池芯电压降至少达到 100mV; (c) 电池厚度和最初比较变形至少 50%。 一旦达到最大压力，电压降超过 100 mV 或者电池芯变形超过 50%，压力应该解除。		
1,2	Sample status 样品状态		
	C11#~C15#, at first cycle at 50% of the design rated capacity; C11#~C15#, 在第一个循环 50%的额定容量；		
1,3	Result 测试结果		
Sample No. 样品编号	Max. External Temperature 样品表面最高温度 (°C)	Test result 测试结果	Remark 备注
C11#	23,8	O	/
C12#	24,2	O	/
C13#	24,3	O	/
C14#	24,2	O	/
C15#	23,9	O	/
Note: D -Disassembly, F-Fire, O- no disassembly, no fire. 注：D- 解体；F - 起火；O-无解体、无起火。			

Appendix 7

附表 7

Test Items 测试项目	Overcharge 过度充电		
1,1	Test procedure 测试步骤		
	When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the or 22V 如果厂家推荐的充电电压不超过 18V，本测试的最小充电电压应该是两倍的厂家推荐的最大充电电压或者是 22V	The manufacturer's recommended maximum charge voltage is 4,23V. The manufacturer's recommended maximum continuous charge current is 2800mA.The voltage of the test is 8,46V. And the Current is 5600mA. 厂家推荐最大充电电压为 4, 23V，厂家推荐最大充电电流为 2800mA. 测试的电压为 8, 46V，电流为 5600mA。	
	When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1,2 times maximum charge voltage 如果厂家推荐的充电电压超过 18V，本测试的最小充电电压应该为 1, 2 倍的厂家推荐的最大充电电压	/	
1,2	Sample status 样品状态		
	C16#~C19#, at first cycle in fully charged states; C16#~C19#, 在第一个循环完全充电状态;		
	C20#~C23#, after 50 cycles ending in fully charged states; C20#~C23#, 在第五十个循环完全充电状态;		
1,3	Result 测试结果		
Sample No. 样品编号	Voltage Before test (V) 测试前开路电压 (V)	Test result 测试结果	Remark 备注
C16#	4,18	O	/
C17#	4,18	O	/
C18#	4,18	O	/
C19#	4,17	O	/
C20#	4,18	O	/
C21#	4,18	O	/
C22#	4,17	O	/
C23#	4,17	O	/
Note: D -Disassembly, F-Fire, O- no disassembly, no fire. 注: D- 解体; F - 起火; O-无解体、无起火。			

Appendix 8

附表 8

Test Items 测试项目	Forced discharge 强制放电				
1,1	Test procedure 测试步骤				
	Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D. C, power supply at an initial current equal to the maximum discharge current specified the manufacturer The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell, Each cell shall be forced discharged for a time interval(in hours) equal to its rated capacity divided by the initial test current(in ampere). 在 20±5℃的环境温度下, 将单个电芯连接在 12V 的直流电源上进行强制放电, 此直流电源提供每个电芯初始电流为制造厂指定的最大放电电流, 放电时间为额定容量除以初始电流。				
1,2	Sample status 样品状态				
	C24#~C33#, at first cycle in fully discharged states; C24#~C33#, 在第一个循环完全放电状态;				
	C34#~C43#, after 50 cycles ending in fully discharged states; C34#~C43#, 在第五十个循环完全放电状态;				
1,3	Result 测试结果				
Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果	Sample No. 样品编号	Voltage Before test 测试前开路电压 (V)	Test result 测试结果
C24#	3,229	O	C34#	3,195	O
C25#	3,238	O	C35#	3,222	O
C26#	3,225	O	C36#	3,231	O
C27#	3,239	O	C37#	3,248	O
C28#	3,254	O	C38#	3,244	O
C29#	3,212	O	C39#	3,258	O
C30#	3,240	O	C40#	3,255	O
C31#	3,245	O	C41#	3,262	O
C32#	3,251	O	C42#	3,233	O
C33#	3,244	O	C43#	3,249	O
Note: D -Disassembly, F-Fire, O- no disassembly, no fire. 注: D- 解体; F - 起火; O-无解体、无起火。					

注 意 事 项

Important

1. 本报告无检验单位检验专用章、骑缝章无效。

The test report is invalid without the special seal for testing and Paging seal of Guangzhou MCM Certification and Testing Co., Ltd.

2. 未经本试验室书面同意，不得部分地复制本报告。

Nobody is allowed to photocopy or partly photocopy this test report without written permission of Guangzhou MCM Certification and Testing Co., Ltd.

3. 本报告无批准人、审核人及检测人签名无效。

The test report is invalid without the signatures of Approver, Checker and Tester.

4. 本报告涂改无效。

The test report is invalid if altered.

5. 对检验报告若有异议，应于收到报告之日起十五天内向检验单位提出。

Objections to the test report must be submitted to Guangzhou MCM Certification and Testing Co., Ltd. Within 15 days.

6. 本报告中以逗号代替小数点。

Throughout this report a comma is used as the decimal separator.

7. 本报告仅对来样负责。

The test report is valid for the tested samples only.

检测单位：广州邦禾检测技术有限公司

Laboratory: Guangzhou MCM Certification and Testing Co., Ltd

地 址：中国 广州市番禺区市广路钟三路段 13 号之一

Address: 1 F No.13, Zhong San Section, ShiGuang Road, Panyu District, Guangzhou City, Guangdong Province, China.

电 话：0086-20-34777662

0086-20-34777663

传 真：0086-20-34777665-609

Email: mark.miao@mcmtek.com

Web: [Http://www.mcmtek.com](http://www.mcmtek.com)