

Stacker / Depositor Slicers

The world's only NSF Certified Stacker / Depositor Slicer. Its patented design includes, but is not limited to, a dishwasher-safe chain frame assembly, a liquid collection system and an angled carriage design for consistent slicing of low profile products.




STANDARD FEATURES

- Patented design, including the industry's only dishwasher-safe chain frame design and liquid retention system, reduces clean-up time by up to 40%.
- Lower cost of ownership, including but not limited to, a single, varnished coated PC board with moisture control ventilation system.
- Stainless Steel Construction.
- German high quality manufacturing.
- Patented angled carriage design ensures accurate and consistent slicing of low profile products.
- Automatic stacking, shingling and depositing (VA2000 & VA4000AT).
- Automatic circular party tray output (VA4000AT).
- Programmable up to 99 programs to minimize output variations (VA4000AT only).
- Includes output conveyor and stainless steel stand (VA4000AT).

SAFETY FEATURES

- Patented chain frame system is easily cleaned; dishwasher-safe.
- Liquid capture system makes clean-up a breeze.
- Thickness blade locking mechanism ensures blade is not exposed when carriage is open during cleaning process.
- Auto shutoff button kills power in an instant.

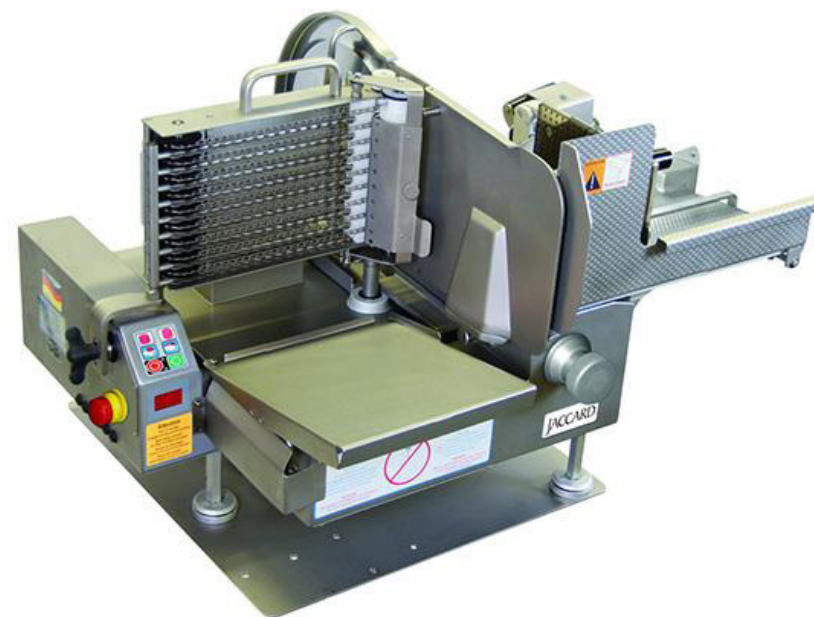

VA2000-NSF530T
(stand sold separately)



VA4000AT-530T
(Stand included)

TECHNICAL SPECIFICATIONS

Overall Dimensions (without stand)
(L x W x H) 26.54 x 33.60 x 22.30 inches

Carriage
(L x W) 21.00 x 14.17 inches

Weight (stand not included)
165.35 lbs.

Power
120V, single-phase

Blade
13 inch, standard stainless steel

Slice Thickness
0-0.40 inches

Cutting Length
15.50 inches
Standard pusher plate spikes can be extended to accommodate greater product lengths

Maximum Cutting Width
10.04 inches

Cutting Height
7.68 inches

Cutting Speed
Variable, approximately 25 - 55 strokes / minute

TECHNICAL SPECIFICATIONS

Overall Dimensions (with stand)
(L x W x H) 50.00 x 33.60 x 52.40 inches

Conveyor Belt
(L x W) 34.65 x 11.02 inches

Carriage
(L x W) 21.00 x 14.17 inches

Weight with Conveyor and Stand
286.60 lbs

Power
120V, single-phase

Blade
13", standard stainless steel

Slice Thickness
0-0.40 inches

Cutting Length
15.50 inches
Standard pusher plate spikes can be extended to accommodate greater product lengths

Maximum Cutting Width
10.04 inches

Cutting Height
7.68 inches

Cutting Speed
Speed of carriage is infinitely variable, about 25-55 strokes per minute