

Gas Connector Hoses



Connect your gas equipment safely and securely with a gas connector hose.

Having a good quality gas hose and the right hose for your application can mean the difference between a kitchen that keeps up with orders and a major safety hazard. It's important to replace a damaged hose immediately and to also consider how you will be using your equipment before choosing a new hose. Regency gas connector hoses are the perfect answer, delivering quality you can depend on.

Stationary

This hose is made from stainless steel corrugated tubing to provide strength and flexibility. This makes it suitable for applications where the equipment is curb-mounted or mounted on stationary legs, and will not be moved on a regular basis for cleaning and maintenance.



Features

Stationary

- Flexible stainless steel corrugated tube
- Black PVC coating prevents grease buildup



Black PVC Coating
Prevents grease buildup

Stationary Gas Connector Hoses

ANSI Z 21.24 / CSA 6.10
ANSI Z 21.75 / CSA 6.27



Item #	Length	Diameter
600GHS1236	36"	1/2"
600GHS3436	36"	3/4"
600GHS1248	48"	1/2"
600GHS3448	48"	3/4"
600GHS3460	60"	3/4"


Stationary Connector Minimum Flow Capacity

ID (OD)	36"	48"	60"
1/2" (5/8")	125,000	106,000	93,200
3/4" (1")	255,900	215,900	197,400

Straight Length Capacity (BTU/HR, 0.64 Sp Gr., 1,000 BTU per cubic ft. at 0.5 inch W.C. pressure drop)

Mobile

This hose is made from stainless steel corrugated tubing to provide strength and flexibility, while a stainless steel braid keeps the hose from stretching. This makes it suitable for applications where the equipment is mounted on casters and will be moved on a regular basis for cleaning and maintenance.

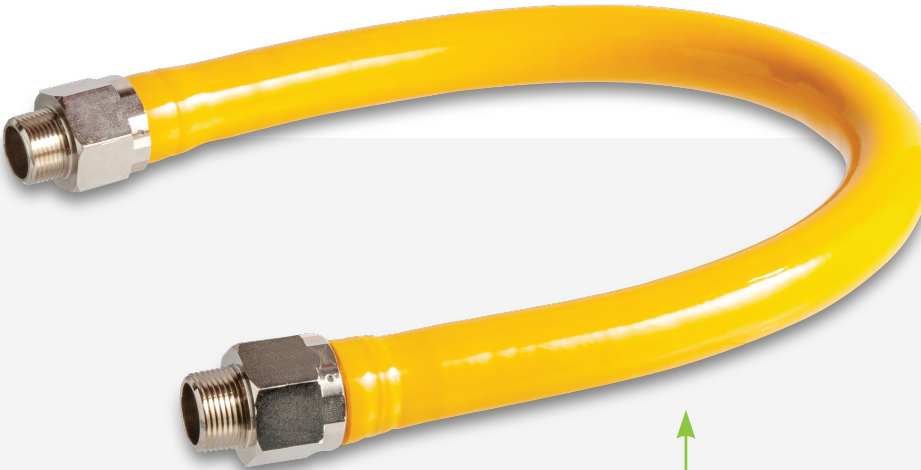

Features

Mobile

- Flexible stainless steel corrugated tube with stainless steel braid for stretch prevention
- Yellow PVC coating prevents grease buildup
- Fittings allow for 360° rotation at both ends

Yellow PVC Coating
Prevents grease buildup

Item #	Length	Diameter
600GHM1236	36"	1/2"
600GHM3436	36"	3/4"
600GHM1036	36"	1"
600GHM1248	48"	1/2"
600GHM3448	48"	3/4"
600GHM1048	48"	1"
600GHM1260	60"	1/2"
600GHM3460	60"	3/4"
600GHM1060	60"	1"
600GHM3472	72"	3/4"

Mobile Connector Minimum Flow Capacity

ID (OD)	36"	48"	60"	72"
1/2" (5/8")	125,000	106,000	93,200	86,000
3/4" (1")	255,900	215,900	197,400	173,900
1" (1 1/4")	515,900	442,700	398,900	347,300

Straight Length Capacity (BTU/HR, 0.64 Sp Gr., 1,000 BTU per cubic ft. at 0.5 inch W.C. pressure drop)

Connector Fittings



Make moving your gas equipment a snap with quick disconnect gas hose fittings.


Quick Disconnects

A great addition to any mobile gas hose installation, this quick disconnect makes it easy to remove your caster-mounted gas equipment from your utility line and to move them for easier cleaning and maintenance! This saves you time and also ensures a safe connection when you hook the equipment back up.

Features

Quick Disconnects

- Allows you to quickly disengage the connection to the gas line
- Makes equipment service easier and safer

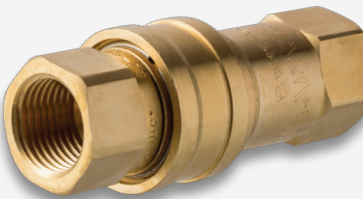

Quick Disconnects


Item #	Diameter
600QD12	½"
600QD34	¾"
600QD10	1"



Connect your gas equipment safely and securely with swivel connectors.

Swivel Connectors

A great addition to any mobile gas hose installation, this swivel connector is a simple way to increase the life of your hose and give yourself added peace of mind about your kitchen's safety! Without a swivel connector in place, even mobile-rated hoses will experience bending and stress at the connection points, which can wear them down over time. A swivel connector takes the stress off of those connection points so that your gas hose will last longer.

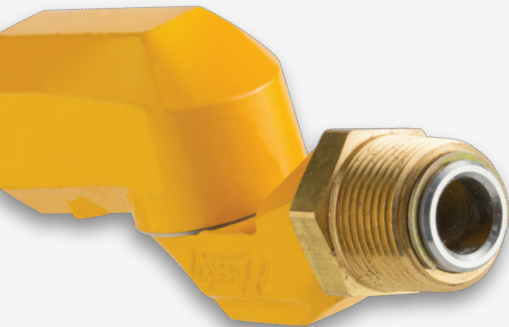

Features

Swivel Connectors

- Prevents hose from twisting or kinking
- Extends life of gas hose by reducing stress on connection points

Swivel Connectors

Item #	Diameter
600GSWVL34	3/4"
600GSWVL10	1"



Gas Connector Hose Kits

Stationary

Item #	Hose Length	Hose Diameter	Full Port Valve	Elbows		Restraining Device	Quick Disconnect	Swivel Connectors	
600GKS1236	36"	1/2"	✓	✓	✓	✗	✗	✗	✗
600GKS3436	36"	3/4"	✓	✓	✓	✗	✗	✗	✗
600GKS1248	48"	1/2"	✓	✓	✓	✗	✗	✗	✗
600GKS3448	48"	3/4"	✓	✓	✓	✗	✗	✗	✗
600GKS3460	60"	3/4"	✓	✓	✓	✗	✗	✗	✗

Mobile

Item #	Hose Length	Hose Diameter	Full Port Valve	Elbows		Restraining Device	Quick Disconnect	Swivel Connectors	
600GKM1236	36"	1/2"	✓	✓	✓	✓	✓	✗	✗
600GKM3436	36"	3/4"	✓	✓	✓	✓	✓	✗	✗
600GKM1036	36"	1"	✓	✓	✓	✓	✓	✗	✗
600GKM1248	48"	1/2"	✓	✓	✓	✓	✓	✗	✗
600GKM3448	48"	3/4"	✓	✓	✓	✓	✓	✗	✗
600GKM1048	48"	1"	✓	✓	✓	✓	✓	✗	✗
600GKM1260	60"	1/2"	✓	✓	✓	✓	✓	✗	✗
600GKM3460	60"	3/4"	✓	✓	✓	✓	✓	✗	✗
600GKM1060	60"	1"	✓	✓	✓	✓	✓	✗	✗
600GKM3472	72"	3/4"	✓	✓	✓	✓	✓	✗	✗
600GKM1S3436	36"	3/4"	✓	✓	✓	✓	✓	✓	✗
600GKM1S1036	36"	1"	✓	✓	✓	✓	✓	✓	✗
600GKM1S3448	48"	3/4"	✓	✓	✓	✓	✓	✓	✗
600GKM1S1048	48"	1"	✓	✓	✓	✓	✓	✓	✗
600GKM1S3460	60"	3/4"	✓	✓	✓	✓	✓	✓	✗
600GKM1S1060	60"	1"	✓	✓	✓	✓	✓	✓	✗
600GKM1S3472	72"	3/4"	✓	✓	✓	✓	✓	✓	✗
600GKM2S3436	36"	3/4"	✓	✓	✓	✓	✓	✓	✓
600GKM2S1036	36"	1"	✓	✓	✓	✓	✓	✓	✓
600GKM2S3448	48"	3/4"	✓	✓	✓	✓	✓	✓	✓
600GKM2S1048	48"	1"	✓	✓	✓	✓	✓	✓	✓
600GKM2S3460	60"	3/4"	✓	✓	✓	✓	✓	✓	✓
600GKM2S1060	60"	1"	✓	✓	✓	✓	✓	✓	✓
600GKM2S3472	72"	3/4"	✓	✓	✓	✓	✓	✓	✓