



HOW TO INSTALL THE NEW MY VA CLUMP CRUSHERS


- 1) With a screwdriver remove the 2 screws, aluminium spout, the steel coffee chute and the old clump crusher.



- 2) The new clump crusher is inserted between the aluminium spout and the steel coffee chute.





- 3) There are two types of clump crusher:
- MY75, MY75G, MY ONE
 - MY85, MY85G

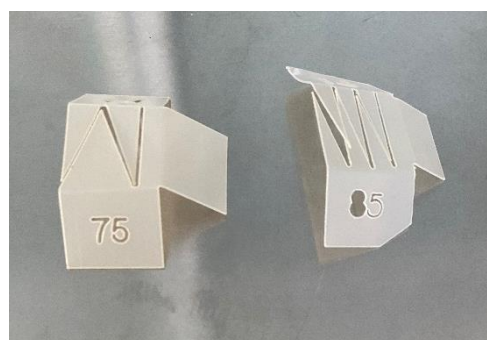


- 4) Before inserting the clump crusher inside the spout, fold it inside at an average angle of 45° (as shown in the example)



- 5) Position the clump crusher as shown:
A – MY75, MY75G, MY ONE
B – MY85, MY85G

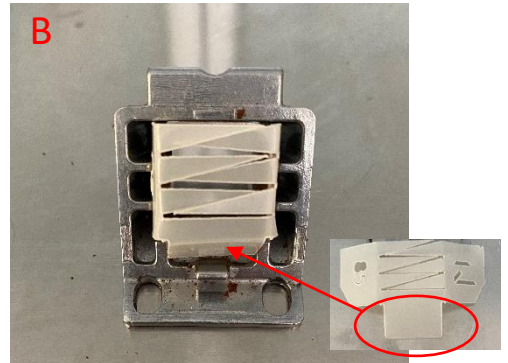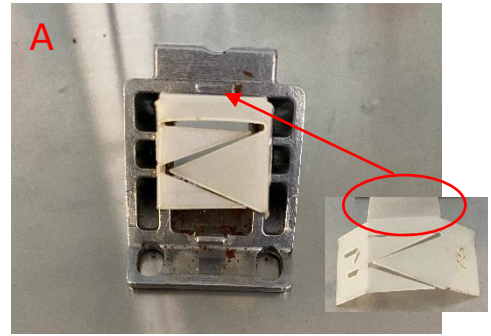

- 6) Install the new spout assembly by engaging the bottom tab of the spout into the groove on the grinder and then pivoting the spout assembly up into place.

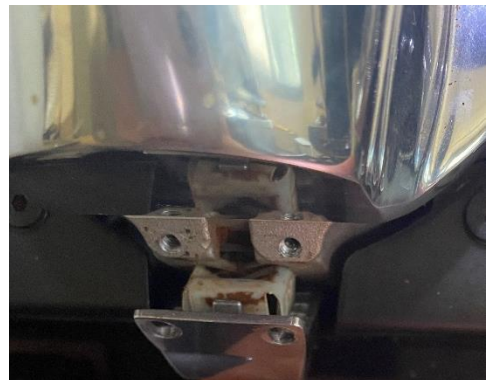

- 7) The clump crusher is ready

