

SANI-LAV[®] COLUMBIA PRODUCTS

Small-Sized Industrial Nozzles with Zinc Body and Temperature Resistant Plastic Handle N2 Series



Model N2
Model N2X



Model N2B
Model N2BX



Model N2W
Model N2WX



Model N2R
Model N2RX



Model N2Y
Model N2YX



Model N2BL
Model N2BLX



Model N2G
Model N2GX



N2 Series Universal Features


Model	Color	Inlet	Material	Max PSI	Max Temp.	GPM @ 100 PSI	Weight	Includes
N2	Safety Orange	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2B	Black	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2W	White	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2R	Red	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2BL	Blue	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2G	Green	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2Y	Yellow	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	10.9	0.5 lbs.	3/4" GHT Threaded Tip
N2X	Safety Orange	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2BX	Black	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2WX	White	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2RX	Red	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2BLX	Blue	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2GX	Green	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip
N2YX	Yellow	3/4" GHT	Zinc, Insulated Rubber	100	150°F/67°C	Low Flow 7.9	0.5 lbs.	3/4" GHT Threaded Tip

Quick Specs

Max Temperature	150°F/65°C
Max Pressure	100 psi
Inlet	3/4" Female GHT allows direct hose connection
Tip	Threaded 3/4" Male GHT
Body Material	Zinc
Components	Brass and stainless steel
Cover Material	Insulated rubber
Handle Type	Hardened temperature resistant Santoprene™
Trigger	Safety shut off when released
Hose Adapter	Model N17 (Sold Separately)
Weight	0.5 lbs.
Dimensions	L 5.48" x H 5.13" x W 1.29"

Water Flow Rate Comparison

PSI	Standard GPM	Low-flow GPM	Water Saving %
20	4.7	3.3	30%
30	5.7	4.2	26%
40	6.4	4.9	23%
50	7.4	5.5	26%
60	8.0	6.0	25%
70	8.9	6.4	28%
80	9.6	7.1	26%
90	10.2	7.5	26%
100	10.9	7.9	28%

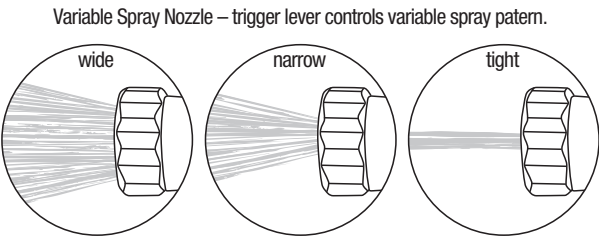

Notice for California Consumers

WARNING: This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.