

# SANI-LAV<sup>®</sup> COLUMBIA PRODUCTS

## Ergonomic Spray Nozzles NP1 Series



Model NP1  
Model NP1X  
Model NP10  
(N20S not included)



Model NP1B  
Model NP1BX  
Model NP1B0  
(N20S not included)



Model NP1W  
Model NP1WX  
Model NP1W0  
(N20S not included)



Model NP1R  
Model NP1RX  
Model NP1R0  
(N20S not included)

Models NP10, NP1B0, NP1W0 and NP1R0  
DO NOT include N20S swivel 3/4" GHT, 3/4" hose barb



NP1 Series Specs

| Model | Color         | Inlet    | Material                    | Max PSI | Max TEMP   | GPM @ 100 PSI | Weight | Includes  |
|-------|---------------|----------|-----------------------------|---------|------------|---------------|--------|-----------|
| NP1   | Safety Orange | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | Hose Barb |
| NP1B  | Black         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | Hose Barb |
| NP1W  | White         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | Hose Barb |
| NP1R  | Red           | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | Hose Barb |
| NP10  | Safety Orange | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | –         |
| NP1B0 | Black         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | –         |
| NP1W0 | White         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | –         |
| NP1R0 | Red           | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | 7.9           | 1.6    | –         |
| NP1X  | Safety Orange | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | Low Flow 4.9  | 1.6    | Hose Barb |
| NP1BX | Black         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | Low Flow 4.9  | 1.6    | Hose Barb |
| NP1WX | White         | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | Low Flow 4.9  | 1.6    | Hose Barb |
| NP1RX | Red           | 3/4" GHT | Stainless, Reinforced Nylon | 150     | 200°F/93°C | Low Flow 4.9  | 1.6    | Hose Barb |

Quick Specs



|                 |                                               |
|-----------------|-----------------------------------------------|
| Max Temperature | 200°F/93°C                                    |
| Max Pressure    | 150 psi                                       |
| Inlet           | 3/4" Female GHT allows direct hose connection |
| Tip             | Not Threaded                                  |
| Body Material   | Stainless steel                               |
| Components      | Stainless steel                               |
| Cover Material  | Insulated nylon with yellow arrow directions  |
| Handle Type     | Stainless steel                               |
| Trigger         | Safety shut off when released                 |
| Hose Adapter    | Model N20S (Not included with "0" models)     |
| Weight          | 1.6 lbs.                                      |
| Dimensions      | L 5.91" x H 6.97" x W 1.88"                   |

Water Flow Rate Comparison

| PSI | Standard GPM | Low-flow GPM | Water Saving % |
|-----|--------------|--------------|----------------|
| 20  | 3.2          | 2.0          | 38%            |
| 30  | 4.1          | 2.5          | 39%            |
| 40  | 4.8          | 2.9          | 40%            |
| 50  | 5.4          | 3.3          | 39%            |
| 60  | 6.0          | 3.6          | 40%            |
| 70  | 6.4          | 3.9          | 39%            |
| 80  | 7.1          | 4.3          | 39%            |
| 90  | 7.4          | 4.5          | 39%            |
| 100 | 7.9          | 4.9          | 38%            |
| 110 | 8.2          | 5.0          | 39%            |
| 120 | 8.6          | 5.4          | 37%            |
| 130 | 9.0          | 5.6          | 38%            |
| 140 | 9.3          | 5.7          | 39%            |
| 150 | 9.9          | 6.1          | 38%            |

NP1 Replacement Parts

| Description            | Part Number    |
|------------------------|----------------|
| Orange Insolated Cover | <b>A</b> NP1OC |
| Black Insolated Cover  | <b>B</b> NP1BC |
| White Insolated Cover  | <b>C</b> NP1WC |
| Red Insolated Cover    | <b>D</b> NP1RC |

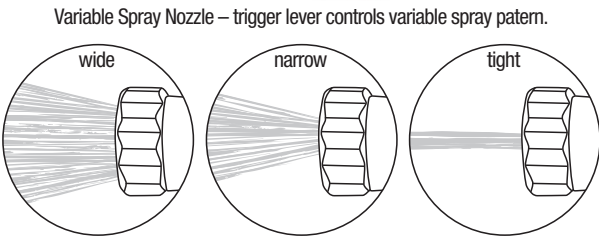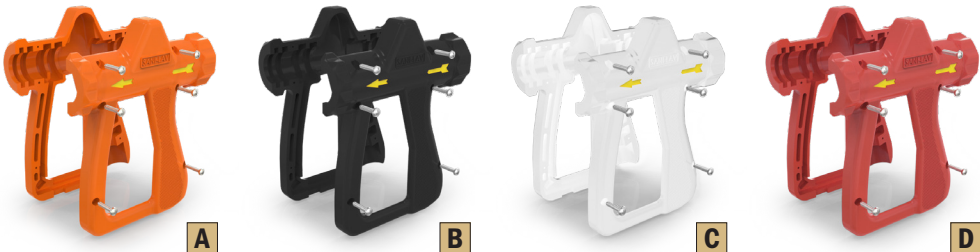

**Notice for California Consumers**  
**WARNING:** This product can expose you to chemicals including Lead, and Phthalates (DEHP) which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).