




**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

RECESSED EMERGENCY LIGHTING



DIMENSIONS

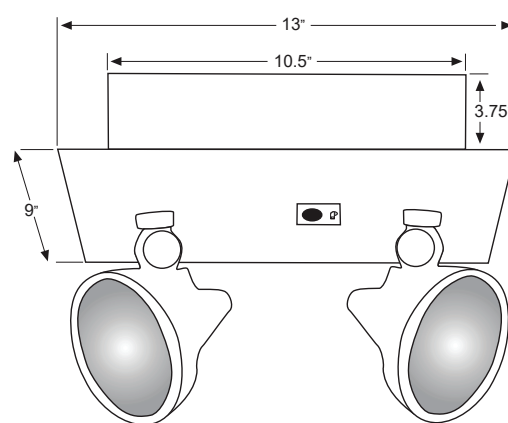

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable Sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Bar hangers on the back box for recessed mount.
- Compatible with drywall or drop ceiling mount installations. Bar hangers included.

HOUSING

- Durable 20 gauge steel trim plate in white or black finish.
- Trim security attached to housing with spring clips

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for two years.
- UL Listed for dry locations. (25°C)
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

ILLUMINATION

- Two fully-adjustable 5.4 watt, glare-free lamp heads.
- High-performance chrome-plated metal reflectors and plastic lens for optimal light distribution.

ORDERING INFORMATION

MODEL	EMERGENCY OPERATION	VOLTAGE INPUT	LAMP WATTAGE	BATTERY VOLTAGE	REMOTE CAPABLE	COLOR OPTION
02-EREC-WB	90 Min	120V/277V	2x5.4W	6V	YES	WHITE
02-EREC-BB	90 Min	120V/277V	2x5.4W	6V	YES	BLACK

***Self Diagnostic Option Available*

Contractor Lighting Supply • (877)-664-5483 • www.contractorlighting.com