



EV9613-10

XC² Filter Cartridge

Delivers premium quality water for fountain and combination applications



XC² Replacement Cartridge: EV9613-10

BENEFITS

New and improved Micro-Pure II media with AgION™ antimicrobial protection inhibits any potential bacterial growth

Reduces chlorine taste and odor and other offensive contaminants that can adversely affect the taste of beverages

Improves the taste of fountain beverages and helps retain the drink's carbonation

Precoat submicron technology reduces dirt and particles as small as 1/2 micron in size and reduces possible health contaminants such as asbestos fibers and Cryptosporidium and Giardia cysts

Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear

Sanitary cartridge replacement is simple, quick and clean. Internal filter parts are never exposed to handling or contamination

33% more capacity than the MC filter cartridge

NSF Certified under NSF/ANSI Standards 42

INSTALLATION TIPS

Install vertically with cartridge hanging down

Allow 2-1/2" clearance below the cartridge for easy cartridge replacement

Flush cartridge by running water through system for five minutes at full flow

OPERATION TIPS

Change cartridges on a regular 6 month preventative maintenance program

Change cartridges when capacity is reached or when pressure falls below 10 psi

Always flush the filter cartridge at time of installation and cartridge change

APPLICATION/SIZING

For fountain beverage and combination applications

Use when extreme water conditions require longer life and larger capacity filter

Rated Capacity: 12,000 gallons (45,425L)

SPECIFICATIONS

Overall Dimensions:

25"H x 3.25"Diameter

Service Flow Rate:

Maximum 1.67 gpm (6.3 Lpm)

Rated Capacity: 12,000 gallons

Pressure Requirements:


10 - 125 psi (0.7 – 8.6 bar), non-shock

Temperature: 35 - 100°F (2 - 38°C)

No electrical connection required

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

XC² Filter Cartridge

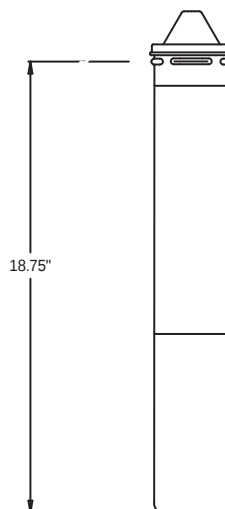

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



System Tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

Standard No. 42: Aesthetic Effects
Chemical Unit
Taste and Odor Reduction
Chlorine Reduction
Mechanical Filtration Unit
Particulate Reduction, Class I:
99.9+% reduction of particles
one-half micron and larger in size
Standard No. 53: Health Effects
Mechanical Filtration Unit
Turbidity Reduction
Cyst Reduction
Asbestos Reduction



EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE) S.A.
INDUSTRIEPARK WOLFSTEE
TOEKOMSTLAAN 30
B-2200 HERENTALS
BELGIUM
TEL 32-14-283500
FAX 32-14-283505

In Japan:
EVERPURE JAPAN LLC
HASHIMOTO MN BLDG. 7F
3-25-1 HASHIMOTO SAGAMIHARA-SHI
KANAGAWA 229-1103
JAPAN
TEL 81-(0)42-775-3011
FAX 81-(0)42-775-3015

FILTER PURE SYSTEMS, INC.
5405 BORAN PLACE
TAMPA, FL 33610
Ph: 813-626-9600 Fax: 813-626-4800