


ELEVATION VIEW

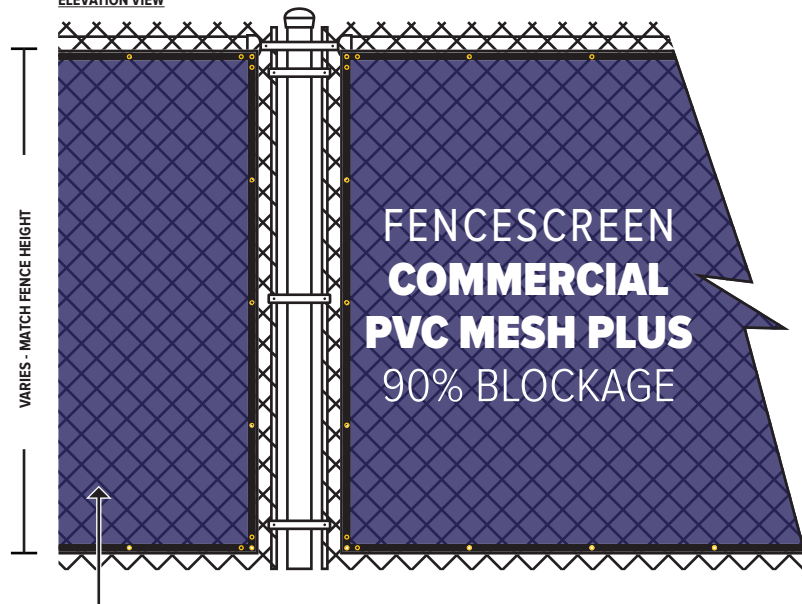


- FENCESCREEN PANELS WITH 2" POLYPROPYLENE WEBBING FOR EDGE REINFORCEMENT.
- 3/8" BRASS GROMMETS AT 24" ON CENTER ATTACH TO FENCE WITH FENCESCREEN FASTENERS OR GALVANIZED HOG RINGS.

FENCESCREEN MATERIAL SPECIFICATIONS


MATERIAL COMPOSITION: MAXFLEX PROPRIETARY PVC MESH W/ UV-ADDITIVES

PROPERTIES	RESULTS
Weight	330 g/m ²
Grab Tensile	230/200 lbs.
Base Fabric	9x18 1000 Denier
Strip Tensile	200/140 lbs.
Flame Resistance	Not consumed within 2 min.
Shade Percentage	90%

ATTACHMENT DETAIL 3D

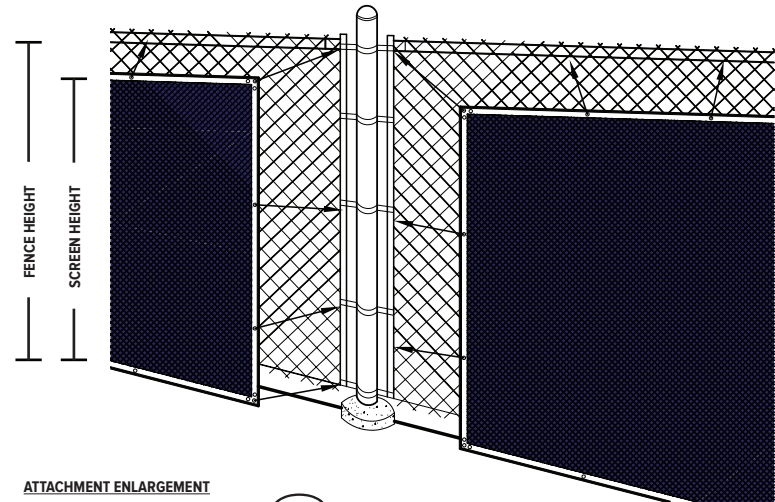

ATTACHMENT ENLARGEMENT

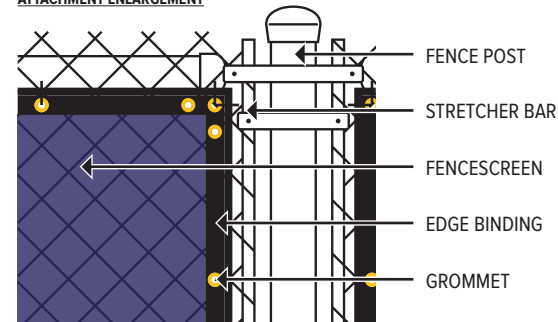

NOTE:

- INSTALL PER FENCESCREEN MANUFACTURER RECOMMENDATION
- REFER TO STRUCTURAL PLANS FOR ALL FOOTING SIZE

AVAILABLE COLORS:



**350
SERIES**

**COMMERCIAL PVC
MESH PLUS**



DRAWING #
FS350CP COMMERCIAL PVC
MESH PLUS

888-313-6313
WWW.FENCESCREEN.COM