

36E Series Heavy-Duty Combination Top Range

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- 36ER32-3
- 36ES32-3



Model 36ER32-3
 Combination All Purpose Plate
 And Open Element Top Range

Standard Features

- Stainless steel front and sides
- Stainless steel front rail
- Two 8in (203mm) tubular 2.1kW elements
- 24" (610mm) all-purpose plate controlled by two thermostats, 290°/650°F (143°/343°C)
- 5kW heater per every 12" width
- 3/4" (19mm) thick steel plate
- Front and rear grease troughs to catch excess grease and spillage. Drains into grease pans located under range top
- 3" (76mm) high stainless steel vent raiser
- Heat-resistant, cool-to-touch oven door handle
- Chrome-plated, 4-position removable rack guides w/oven rack
- Aluminized steel oven cavity.
- Two upper heaters (3kW total) and two lower heaters (3.5kW total).
- Separate power control for upper and lower heaters is provided plus overall oven thermostatic control.
- 6" (152mm) adjustable chrome-plated legs (NSF)
- 1-Year limited parts & labor (USA & Canada)

Options & Accessories

- Stainless steel main back (R&S models)
- Extra oven rack
- Set of (4) Polyurethane (non-marking) swivel casters complete with front brakes
- 6" (152mm) adjustable stainless steel legs
- Marine equipment - storm rails for pots, hand rails, oven door latch, drip tray stop and deck fasteners

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

Specifications

Heavy-duty electric range, Model 36ER32-3, combination top ; consisting of one 24" (610mm) x 24" (610mm) all-purpose plate and one 12" (305mm) open tubular element section.

Full-size oven is controlled by a heavy-duty electromechanical thermostat.

Top plate has two thermostat-controlled heat zones, each element is controlled by a three-heat switch.

Oven interior is 13.5" (343mm) H x 26.25" (667mm) W 29" (533mm) D.

Oven rack with removable four-position chrome-plated rack guides, front and rear stainless steel grease troughs.

Stainless steel front and sides.

Circuit breakers or fuses provide electric circuit protection.


Available with casters or for dais mount.

Model 36ES32-3 has storage base in lieu of oven section.





36E Series Heavy-Duty Combination Top Range

36E Series Heavy Duty Combination Top Range

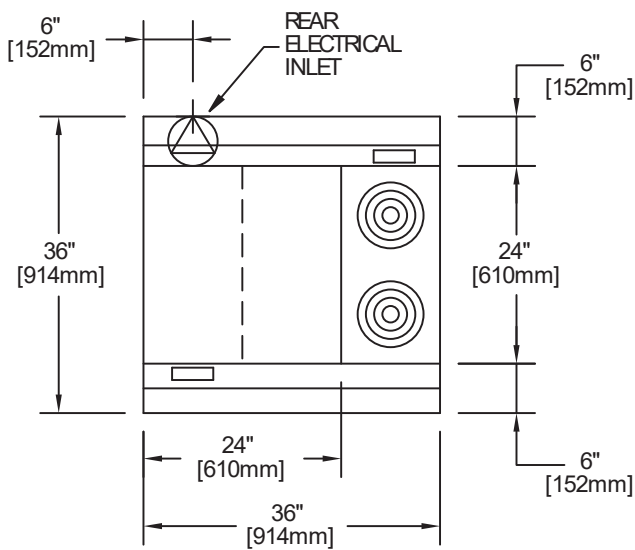

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only.

Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

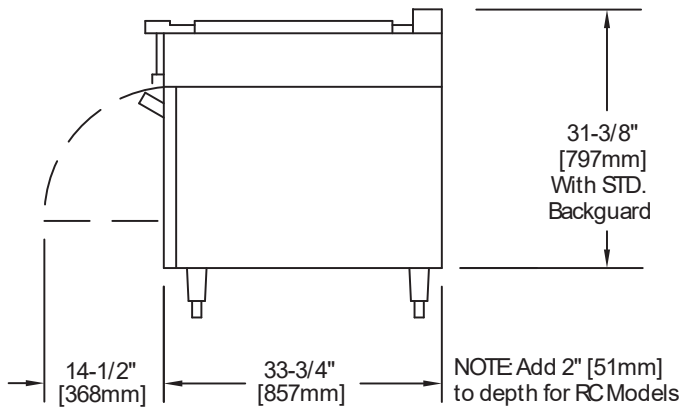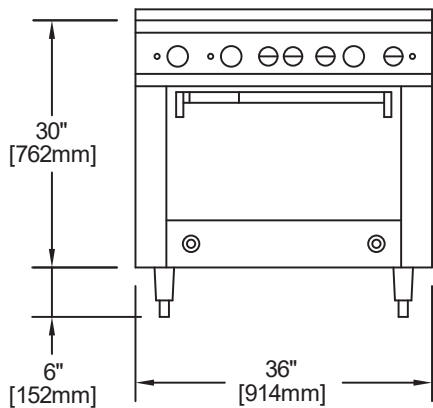

MODEL	TOTAL KW	3-PHASE KW PER PHASE ALL VOLTAGES			NOMINAL AMPERES PER LINE							
					SINGLE PHASE		THREE PHASE					
		208V					240V					
		X-Y	Y-Z	X-Z	208V	240V	X	Y	Z	X	Y	Z
36ER32-3	20.7	6.5	4.2	10	99	88	69	45	61	60	39	53
36ES32-3	14.2	5	4.2	5	68	60	42	39	39	37	33	33

CLEARANCES			
ENTRY		TO COMBUSTIBLE WALL	
CRATED	UNCRAVED	SIDES	REAR*
41-1/4" (1048mm)	36-1/4" (921mm)	3" (76mm)	1/2" (13mm)

Shipping Cubic Feet = 51

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6858D
05/26

