

CCH34 Combination Food Processor



SPECIFIER STATEMENT

Specified unit will be an NSF rated combination food processor. Specified unit has continuous feed operation at 500/800 RPM and bowl processing operation at 1450/2650 RPM. Food processor offers SureSense™ speed control, a heavy-duty aluminum base and has a compact design. Features a 1.34 HP motor and 4 speed settings for high quality results. All removable parts are dishwasher safe.

Project _____

AIA # _____ SIS # _____

Item # _____ Quantity _____ C.S.I. Section 114000

MODEL

- **CCH34** Combination Food Processor
- **CCH34-1A** Combination Food Processor with CCH-4PACK

STANDARD FEATURES

- + 4 speed settings for high quality results
- + SureSense™ speed control
- + Continuous feed operation at 500/800 RPM
- + Bowl processing at 1450/2650 RPM
- + Dice capability
- + Pulse function for precise operator control
- + Heavy-duty aluminum base
- + Stainless steel cutter/mixer attachment bowl
- + BPA-free Tritan™ lid and scraper; continuous-feed attachment and ejector plate
- + Compact design for space saving operation
- + All removable parts are dishwasher safe
- + 1.34 HP motor

ACCESSORIES

- CCH-4PACK – 4 Plate Package: ½" Slicing Plate; ½" Shredder Plate; ¾" Slicing Plate; ¾" Dicing Grid

All FP100 cutting tools will fit this machine

CCH34 COMBINATION FOOD PROCESSOR

Approved by _____ Date _____ Approved by _____ Date _____

SOLUTIONS/BENEFITS

PERFORMANCE

1.34 HP Motor

3.2 quart stainless steel bowl

Patented integral multi-function wiper system

- + Guides product into cutting tools faster

SureSense Speed Control

- + Identifies which processor head is installed and adjusts speed for optimal results
- + Chute Head:
 - 500 RPM – soft products (tomatoes, bananas, kiwis)
 - 800 RPM – harder products (potatoes, carrots)
- + Bowl Style:
 - 1450 RPM – delicate dishes (salsa, parsley)
 - 2650 RPM – emulsifying (sauces, salad dressings)

Double Tritan™ cover with bowl gasket

- + Holds up to heat better than polypropylene

EASE OF USE

3.2 quart stainless steel bowl

Patented integral multi-function wiper system

- + Provides better viewing by cleaning underside of the cover

Double Tritan™ cover with bowl gasket

- + Ensures clear visibility while preventing escape of contents for more complete processing

SureSense Speed Control

- + Identifies which processor head is installed and adjusts speed for optimal results

SANITATION & CLEANING

3.2 quart stainless steel bowl

Double Tritan™ cover with bowl gasket

- + Ensures clear visibility while preventing escape of contents for more complete processing

OPERATOR ASSURANCE

Double Interlock Switch

- + Prevents machine operation when the pusher plate swings away, is open or if the feed cylinder is removed

SPECIFICATIONS

Motor: Four speeds, 1.34 HP motor, thermal motor protection with automatic reset.

Electrical: Furnished in 120/60/1, 9 amps, UL listed.

Finish/Construction: Machine base of aluminum. Cutter/mixer attachment bowl of stainless steel, lid and scraper of polycarbonate. Continuous feed attachment and ejector plate of Acetal™.


Speeds: Four speeds with SureSense™ speed control. 500/800 RPM for continuous feed operations. 1450/2650 RPM bowl processing.

Cord and Plug: 3-wire electrical cord and plug. Cord is 6' in length.

Warranty: All parts, service and travel coverage for one year excluding wear items.

Capacity: 3.2 quart stainless steel cutter/mixer bowl. Processes 4.4 pounds per minute with continuous-feed attachment.

Controls: Sealed dial controls with integrated pulse function.

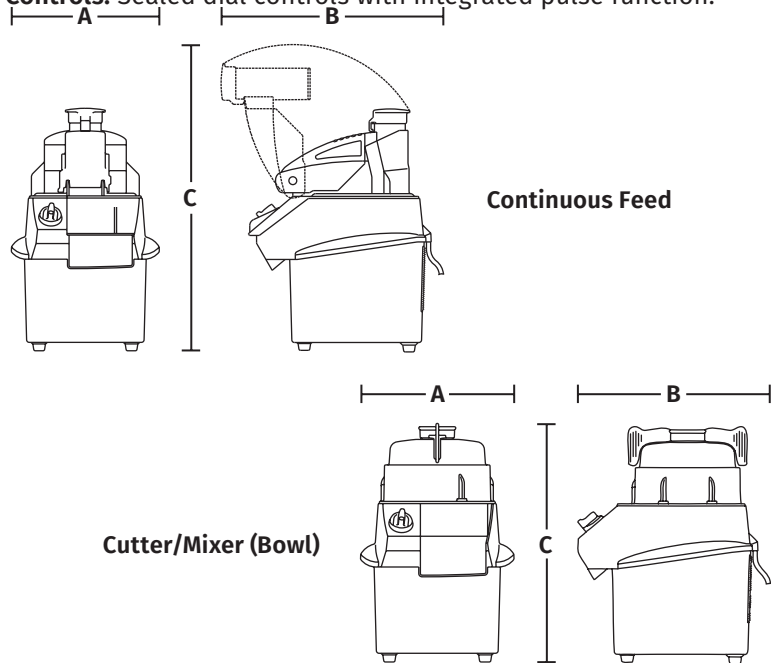

Model No.	Capacity	Product Dimensions			Weight
		Width A	Depth B	Height C	
CCH34	Cont. Feed – 4.4 lbs./min. (2 kg/min.)	11" (280 mm)	13¼" (350 mm)	23" (585 mm)	Net 23 lbs. (11 kg)
	Bowl – 3.2 quarts (3 liters)	11" (280 mm)	13" (330 mm)	17" (432 mm)	Ship 33 lbs. (15 kg)

Motor	Electrical	Cutting Speeds	Box Dimensions		
			Width A	Depth B	Height C
1.34 HP	120/60/1 9 amps	Cont. Feed – 500/800 rpm Bowl – 1,450/2,650 rpm	16¼" (413 mm)	16¼" (413 mm)	27" (686 mm)