

68 INCH CONVEYOR PIZZA OVENS



DESCRIPTION

Vollrath® easy-to-use Conveyor Pizza Ovens are designed to bake frozen pizzas, par-baked pizzas, fresh/raw dough, frozen dough that's been completely thawed, flat breads, and garlic or cheese bread. Ideal for operations that offer pizza alongside other menu items, these ovens deliver versatility and convenience.

Independent top and bottom heat controls, along with an adjustable conveyor speed, allow operators to fine-tune settings based on crust type and toppings for consistent, high-quality results.

These ovens are not intended for deep-dish pizza, raw foods (other than pizza products), or high-volume pizzeria use. Units are not suitable for household, industrial, or laboratory applications.

NOTE: For best results, thaw frozen pizza crusts and toppings completely before assembling.

CLEARANCE AND ENVIRONMENT REQUIREMENTS

- Do not place on surfaces or near walls, partitions or kitchen furniture unless they are made of non-combustible material or clad with non-combustible heat-insulating material. Ovens must not be used near or below curtains and other combustible materials.
- Maximum ambient temperature: 104° F (40 ° C).

WARRANTY

- The warranty period is 2 year parts, 1 year labor.
- Heater tubes: The warranty period is 1 year parts and labor. Heater tube glass damage is not covered by this warranty.
- For full warranty details, please refer to vollrathfoodservice.com.

Approvals	Date

AGENCY LISTINGS



UL tested and verified for ventless operation – meets or surpasses EPA 202

Due to continued product improvement, please consult www.vollrath.com for current product specifications.

ITEMS


Item No.	Model	Description
PO4-20814L-R	JPO14	14" Wide Left to Right Conveyor, 208V
PO4-20814R-L		14" Wide Right to Left Conveyor, 208V
PO4-22014L-R*		14" Wide Left to Right Conveyor, 220V
PO4-22014R-L*		14" Wide Right to Left Conveyor, 220V
PO4-24014L-R		14" Wide Left to Right Conveyor, 240V
PO4-24014R-L		14" Wide Right to Left Conveyor, 240V
PO4-20818L-R	JPO18	18" Wide Left to Right Conveyor, 208V
PO4-20818R-L		18" Wide Right to Left Conveyor, 208V
PO4-22018L-R*		18" Wide Left to Right Conveyor, 220V
PO4-22018R-L*		18" Wide Right to Left Conveyor, 220V
PO4-24018L-R		18" Wide Left to Right Conveyor, 240V
PO4-24018R-L		18" Wide Right to Left Conveyor, 240V
*Made to order item. Made to order items cannot be canceled or returned.		
Accessories/Kits	Model	Description
351036	JPO14	14"-Wide Dual-Oven Stacking Spacer
351037	JPO18	18"-Wide Dual-Oven Stacking Spacer

FEATURES


- Stainless steel construction enhances durability.
- Based on independent UL testing, this product complies with NFPA96 for ventless operation using the EPA202 test method. Ventless allowance is dependent upon Authority Having Jurisdiction (AHJ) approval.
- Variable speed control allows for real-time adjustments.
- Thermostatic, independent top and bottom heat controls achieve desired results.
- Units can stack to save space (see reverse for item #s).
- Quartz heaters are energy efficient and fast reacting.
- Loading and receiving trays are included.
- Adjustable product opening creates added heat control.
- Maintenance-free drive system does not require lubrication.
- High-quality, insulated wires prevent dry rotting and cracking.
- High-temperature terminal blocks with stainless steel clamps provide superior connections and ease of serviceability.
- Adjustable legs offer product height flexibility.
- A 6 ft. (1.8 m) cord with plug allows for placement options.
- Unit is made in the USA.

68 INCH CONVEYOR PIZZA OVENS

DIMENSIONS (Shown in inches (cm))

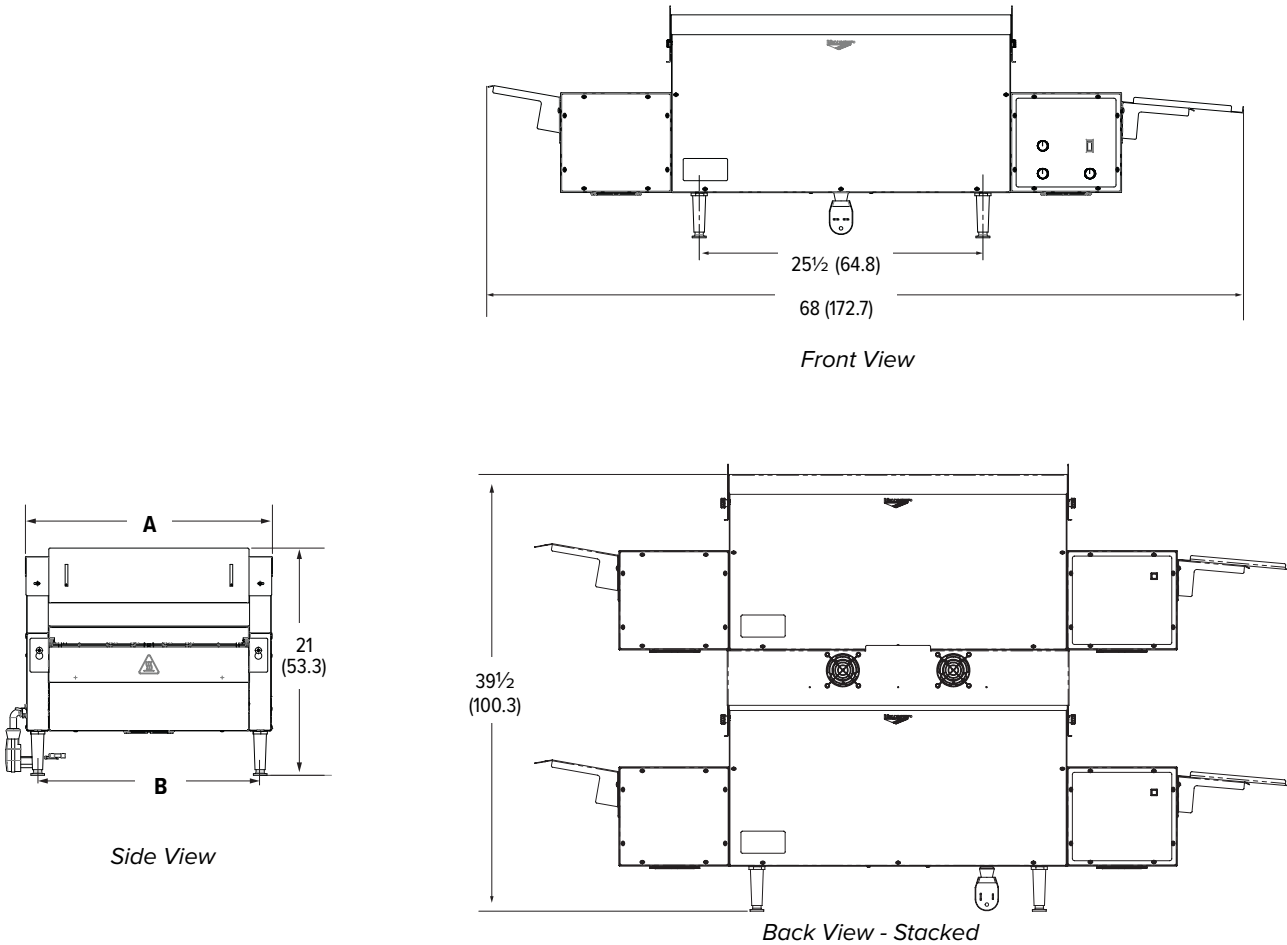

SPECIFICATIONS

Item No.	Model	Conveyor Width IN (CM)	Product Opening IN (CM)	Volts	Watts	Amps	Hz	(A) Width IN (CM)	(B) Leg-to-Leg	Weight LB (KG)	Plug	Receptacle
PO4-20814L-R	JPO14	14 (35.6)	Adjustable 1½ to 4 (3.8 to 10.2)	208	5600	27	60	18⅞ (47.5)	16½ (41.9)	130 (59)	NEMA 6-50P	208-240V  NEMA 6-50R
PO4-20814R-L				220		25.5						
PO4-22014L-R				240		23.5						
PO4-22014R-L												
PO4-24014L-R												
PO4-24014R-L												
PO4-20818L-R	JPO18	18 (45.7)	Adjustable 1½ to 4 (3.8 to 10.2)	208	6200	29.8	60	22⅞, (57.7)	20½ (52.1)	185 (83.9)	NEMA 6-50P	
PO4-20818R-L				220		28.3						
PO4-22018L-R				240		26						
PO4-22018R-L												
PO4-24018L-R												
PO4-24018R-L												

