

**GAS**

SPECIALTY RANGES | STOCK POT AND WOK

IMPERIAL**ISP-18-W**

Shown with optional casters.

Model Numbers

ISPA-18
 ISPA-18-2
 ISP-J-SP
 ISP-J-SP-2
 ISP-18-W
 ISP-J-W-16
 ISP-J-W-13

ISPA-18

Shown with optional casters.
STOCK POT RANGE

**ISP-J-SP**

Shown with optional casters.
**HI-TEMP STOCK
 POT RANGE**

**ISP-J-W13**

Shown with optional casters.
**MANDARIN
 WOK RANGE**

**THREE RING BURNERS**

- 90,000 BTU (26 KW) total output per burner
- Heat selections from simmer to high heat
- Burner utilizes two adjustable gas valves for the inner and outer rings.

JET BURNER


- Anti-clogging 18 tip jet burner, 125,000 BTU (37 KW).
- Intense cone shaped heat.
- Burner has a continuous pilot for instant ignition.
- "L" shaped gas control valve for maximum control.

WOK TOPS

- Tempura and Mandarin wok styles are available.
- Wok top is all welded stainless steel.
- Welded in 8" (203 mm) h cylinder concentrates and intensifies heat.
- Top removes for cleaning and has a roll front edge for easy loading.
- 13" and 16" (330 and 406 mm) wok top sizes available.
- Mandarin style has a gradual slope design to reduce spill-overs.



**ANTI-CLOGGING 18-TIP JET
 BURNER. OPTIONAL BURNER
 WITH CONE-SHAPED IN-
 TENSE HEAT 125,000 BTU/HR**



**3-RING BURNER STANDARD
 BURNER WITH TWO ADJUST-
 ABLE VALVES, 90,000 BTU/HR
 FOR HIGH PERFORMANCE
 COOKING**

TOP GRATE

- Reinforced cast iron construction.
- Built-in rolled front is easy to load.
- Grate removes for cleaning.


EXTERIOR FEATURES

- Stainless steel front and sides with welded and finished seams.
- Stainless steel cabinet base for storage.
- Full width drip pan.
- Heavy duty legs with adjustable feet.
- One year parts and labor warranty.



GAS

SPECIALTY RANGES | STOCK POT AND WOK

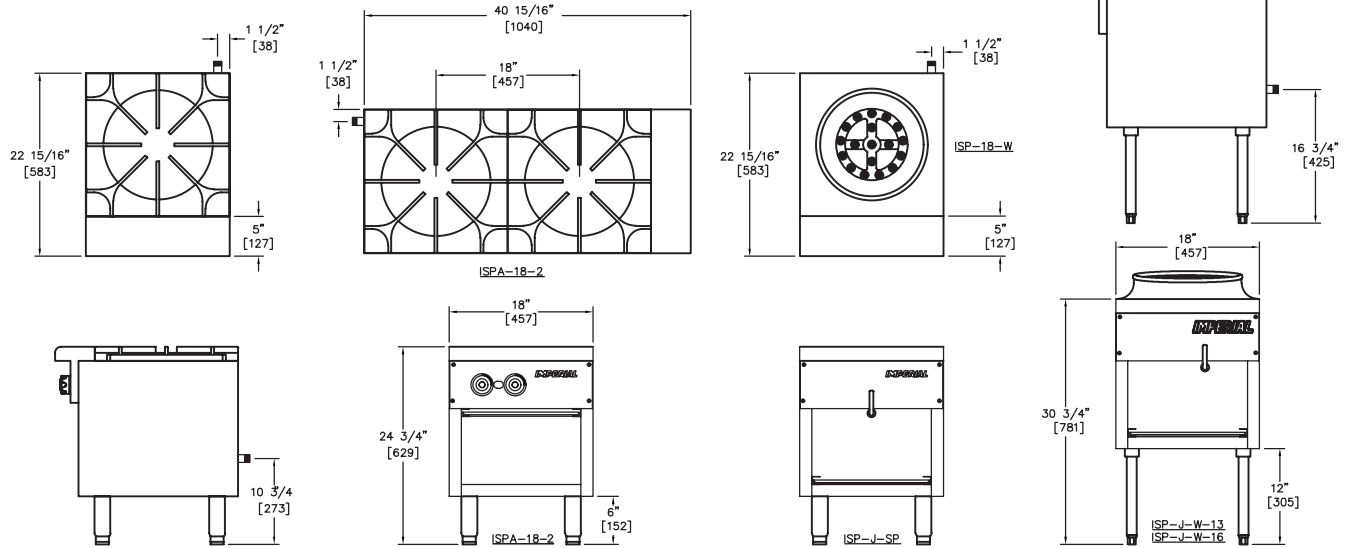

STOCK POT RANGES

MODEL	BURNERS/ AND STYLE	GAS OUTPUT		SHIP WEIGHT	
		BTU	KW	KG	LBS
ISPA-18	1 3-RING BURNER TOP GRATE	90,000	26	57	125
ISPA-18-2	2 3-RING BURNER TOP GRATE	180,000	53	114	250

HI-TEMP STOCK POT RANGES

MODEL	BURNERS AND STYLE	GAS OUTPUT		SHIP WEIGHT	
		BTU	KW	KG	LBS
ISP-J-SP	1 ANTI-CLOGGING JET BURNER TOP GRATE	125,000	37	57	125
ISP-J-SP-2	2 ANTI-CLOGGING JET BURNERS TOP GRATE	180,000	53	114	250

TEMPURA WOK RANGE

MODEL	BURNERS AND STYLE	GAS OUTPUT		SHIP WEIGHT	
		BTU	KW	KG	LBS
ISP-18-W	1 3-RING BURNER 16" (406) WOK OPENING	90,000	26	57	125

MANDARIN WOK RANGES

MODEL	BURNERS AND STYLE	GAS OUTPUT		SHIP WEIGHT	
		BTU	KW	KG	LBS
ISP-J-W-16	1 ANTI-CLOGGING JET BURNER 16" (406) WOK OPENING	125,000	37	57	125
ISP-J-W-13	1 ANTI-CLOGGING JET BURNER 13" (330) WOK OPENING	125,000	37	57	125

SERIES	DIMENSIONS	CRATED DIMENSIONS
ISPA-18	18" W X 22" D X 24-3/4" H (457 X 533 X 629 MM)	20-1/2" W X 25" D X 22" H (521 X 635 X 559 MM)
ISPA-18-2	18" W X 41" D X 24-3/4" H (457 X 1067 X 629 MM)	20-1/2" W X 46" D X 22" H (521 X 1168 X 559 MM)
ISP-J-SP	18" W X 22" D X 24-3/4" H (457 X 533 X 629 MM)	20-1/2" W X 25" D X 22" H (521 X 635 X 559 MM)
ISP-J-SP-2	18" W X 41" D X 24-3/4" H (457 X 1067 X 629 MM)	20-1/2" W X 46" D X 22" H (521 X 1168 X 559 MM)
ISP-18-W	18" W X 22" D X 30" H (457 X 533 X 762 MM)	20-1/2" W X 25" D X 22" H (521 X 635 X 559 MM)
ISP-J-W-16	18" W X 22" D X 30" H (457 X 533 X 762 MM)	20-1/2" W X 25" D X 22" H (521 X 635 X 559 MM)
ISP-J-W-13	18" W X 22" D X 30" H (457 X 533 X 762 MM)	20-1/2" W X 25" D X 22" H (521 X 635 X 559 MM)

MANIFOLD PRESSURE		
NATURAL GAS	PROPANE GAS	MANIFOLD SIZE
5.0" W.C.	10.0" W.C.	3/4" (19 MM)

OPTIONS AND ACCESSORIES

STOCK POT RANGES

- Extra Reinforced cast iron grate
- Additional control for 3-ring burner
- Interchangeable top with ISP-18-W wok cylinder
- Side-by-side range orientation in lieu of front-to-back (available at an additional charge)
- Quick disconnect and flexible gas hose
- 6" (152 mm) casters, set of 4, 2 with brakes
- 6" (152 mm) casters, set of 6, 2 with brakes (for models ISPA-18-2 and ISP-J-SP-2)

WOK RANGES

- Interchangeable top with ISPA-18 reinforced cast iron grate
- 13" (330 mm) stainless steel wok top
- Extra 13" (330 mm) or 16" (406 mm) stainless steel wok top
- Quick disconnect and flexible gas hose
- 6" (152 mm) casters, set of 4, 2 with brakes

CLEARANCE REQUIREMENTS

For use only on non-combustible floors with legs or casters. 0" clearance from non-combustible side and rear walls. Provide 15" (381 mm) minimum clearance from combustible side walls and 17" (432 mm) clearance from combustible wall at rear.

