

# 200-CW Series

## Cold Food Drop-In Well

ALTO-SHAAM.

Safely hold cold food while maintaining food temperature and quality with Alto-Shaam cold wells. Cold wall, conductive cooling eliminates the need for forced air that degrades food quality. A digital thermostat holds food at the ideal temperature for any cold dish. Complete the look with complementing waterless round and hot food wells.



200-CW

### Standard features

- Cold wall drop-in refrigerated cold display pan
- Meets NSF Std. #7 for cold holding at 41°F [5°C] or below
- Digital thermostat provides cold holding temperature flexibility
- Exterior body is corrosion resistant steel
- Insulated with CFC free, foamed in place polyurethane
- Recessed, stainless steel ledge provided for supporting pans, adaptor bars included
- Stainless steel top and coved corner interior
- Dual air movement louver
- Condensing unit mounted on a swivel platform that allows for 90 degrees of rotation of intake/exhaust louver, giving the option of mounting the louver on any side
- Includes three (3) 20" [508mm] pan divider bars

### Model (select one)

- ☐ 200-CW: Self-contained 1/4 hp compressor
- ☐ 200-CW/R: For use with a remote compressor

### Accessories

- ☐ Remote on/off switch; 8' [2438mm] extension (contact factory for cutout) (SW-35840)

### Pan divider bars

- ☐ 12" [305mm] for half-size/third-size pans (1014395)



CAPACITY

- 2 Two full-size or GN 1/1 pans
  - 4 Four half-size or GN 1/2 pans
  - 6 Six third-size or GN 1/3 pans
- 72 lb [32,6 kg] product maximum\*
- 44 qt [42 L] volume maximum\*


\*Based on 6" [152mm] deep pans. Will also accept 2-1/2" [65mm] and 4" [102mm] deep pans.



# 200-CW Series

## Specification

ALTO-SHAAM.

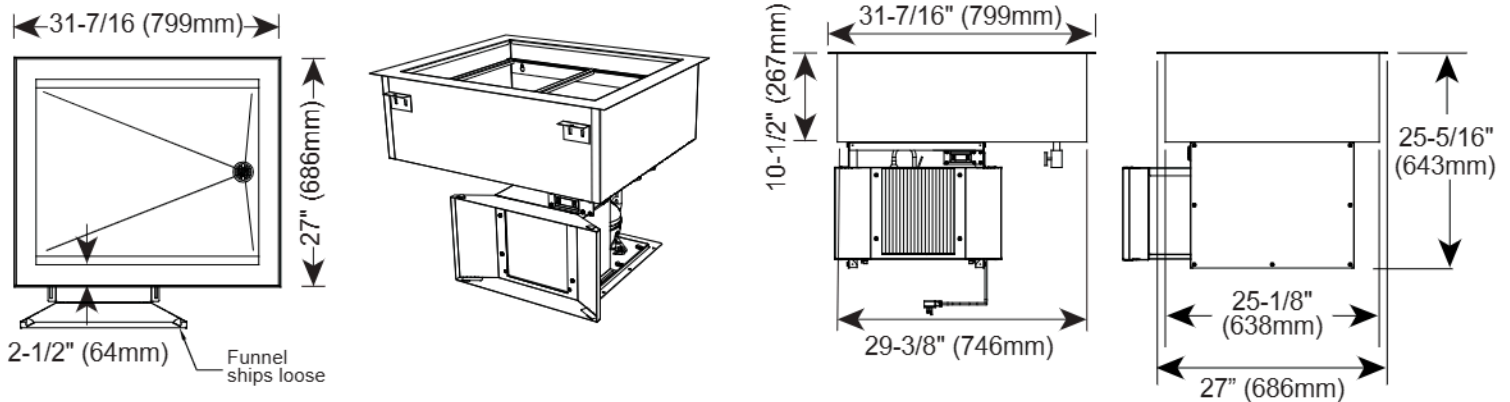

DIMENSIONS

### Exterior (H x W x D)

25-5/16" x 31-7/16" x 27" (643mm x 789mm x 686mm)

### Counter Cutout (L x W)

29-7/8" x 25-1/2" (759mm x 648mm)

### Net Weight

170 lb (77 kg)

### Ship Weight\*

220 lb (100 kg)

\*Domestic ground shipping information. Contact factory for export weight and dimensions.  
Contact factory for 200-CW/R information.

### Interior (H x W x D)

8-3/4" x 26-7/16" x 21-7/8" (222mm x 671mm x 556mm)

### Dual Air Movement Louver Cutout (H x W)

21-1/2" x 20-1/2" (546mm x 521mm)

### Ship Dimensions (L x W x H)\*

36-1/2" x 32" x 36-1/2" (927mm x 813mm x 927mm)



CHECK FIRST

- The countertop material must be water resistant.
- A distance of 3/4" (19mm) or more is required between the top rims of the wells to ensure easy cleaning.
- Appliance must be installed level.
- Appliance must not be installed in any area where it may be directly affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Appliance must not be installed under a hood.
- Avoid installing appliance under a 4-way ceiling diffuser.
- Outdoor use is not recommended.
- A water drain or water catch basin is required for appliance.
- LED lighting is recommended for overhead lighting.
- Requires R290 refrigerant.



CLEARANCE

4" (102mm) in front of dual air movement louver



ELECTRIC

| 200-CW | V   | Ph | Hz | A   | kW  | Cord & Plug                                         |
|--------|-----|----|----|-----|-----|-----------------------------------------------------|
| 115V   | 115 | 1  | 60 | 5.0 | 0.6 | NEMA 5-15p<br>15A-125V plug<br>9' (229mm) long cord |

### Remote BTU Requirements

Low Temperature compressor: -10°F [-23°C] suction line  
BTU load: 474\*

\*Does not include line run for remote compressor

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)