

Avantco HPU-1836 Full Size Non-Insulated Heated Holding / Proofing Cabinet with Clear Door - 120V

Item #177HPU1836



Technical Data

Width	22 11/16 Inches
Depth	31 3/4 Inches
Height	66 7/16 Inches
Power Cord Length	102 3/8 Inches
Interior Width	18 3/16 Inches
Interior Depth	27 1/8 Inches
Interior Height	53 13/16 Inches
Hertz	60 Hz
Phase	1 Phase
Voltage	120 Volts

Features

- Full size uninsulated design holds up to 36 full size sheet pans; 1 1/2" of clearance between slides
- Heat mode with 9 adjustable settings up to 185 degrees Fahrenheit
- Proof mode adjusts humidity between 30% and 100% up to 115 degrees Fahrenheit
- Integrated easy-to-read LED display on removable bottom control drawer
- 120V, 1,575W

Certifications



5-15P



Certified by NSF




UL Certified

Technical Data

Wattage	1575 Watts
Cabinet Size	Full Height
Casters	With Casters
Color	Red Silver
Construction	Aluminum
Control Location	Bottom Mounted
Control Type	Analog
Door Type	Clear
Dutch Half Doors	Without Dutch Half Doors
Features	Controlled Humidity NSF Certified UL Certified
Full Size Sheet Pan Capacity	36 Pans
Hinge Location	Left Right
Insulated	Without Insulation
Interior Configuration	Lip Load Slides
Lip Load Capacity	100 lb.
Maximum Temperature	185 Degrees F
Number of Doors	1 Doors
Plug Type	NEMA 5-15P
Power Type	Electric
Sections	1 Section
Style	Reach-In
Type	Holding / Proofing Cabinets

Plan View

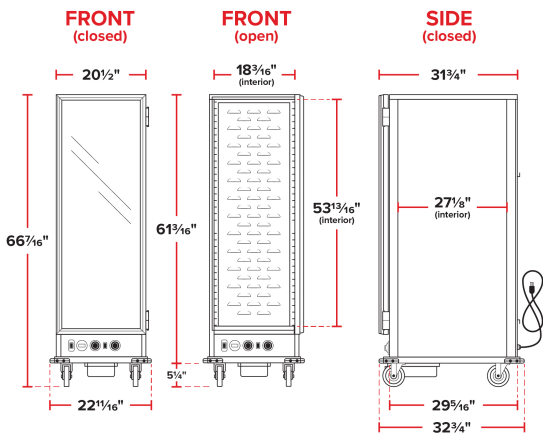



Notes & Details

Designed to keep all your freshly cooked food items hot until they're ready to serve, this Avantco HPU-1836 full size non-insulated heated holding/proofing cabinet helps ensure your restaurant, diner, or bakery is always prepared for high volume meal periods. Boasting nine adjustable settings and a heat mode that can reach 185 degrees Fahrenheit, this cabinet is perfect for storing a wide variety of ready-to-serve dishes. Or, operators can use the unit's integrated proofing mode for operation at a lower temperature (up to 115 degrees Fahrenheit) in order to proof bread before it's ready to bake. Humidity is provided by moisture in the water tray of the bottom of the unit, and adjustable humidity settings from 30% to 100% allow for a completely customized proofing experience.

A total of 36 pan slides accept full size 18" x 26" sheet pans, while a Lexan clear door provides outstanding impact and heat-resistance as well as allowing for easy monitoring of the contents inside. For valuable temperature protection, the door is paired with both magnets and a tight-fitting gasket to ensure the warm air inside does not escape. You can also reverse the door hinges based on your needs. An easy-to-read thermometer for effortless temperature monitoring and a pair of dials is located on the unit's bottom control drawer that can also be removed for quick cleaning. Thanks to four 5" poly casters, this cabinet can be filled and moved from your prep location to the serving area with incredible ease. Other features include integrated corner bumpers that protect nearby walls and equipment during transport. The Avantco HPU-1836 full size cabinet requires a 120V electrical connection.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.