

Item #: 178A23RGHC Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco A-23R-G-HC 29" Glass Door Reach-In Refrigerator

Item #178A23RGHC



### Technical Data

|                 |                |
|-----------------|----------------|
| Width           | 29 Inches      |
| Depth           | 32 3/16 Inches |
| Height          | 82 1/2 Inches  |
| Interior Width  | 24 3/8 Inches  |
| Shelf Width     | 23 1/4 Inches  |
| Interior Depth  | 27 1/8 Inches  |
| Shelf Depth     | 23 5/8 Inches  |
| Interior Height | 53 1/2 Inches  |
| Amps            | 3.6 Amps       |
| Hertz           | 60 Hz          |

### Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Features a self-closing door
- Includes 3 epoxy coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- 115V; 1/3 hp; R-290 refrigerant

### Certifications



5-15P




ETL Listed

## Technical Data

|                      |                                             |
|----------------------|---------------------------------------------|
| Phase                | 1 Phase                                     |
| Voltage              | 115 Volts                                   |
| Wattage              | 348 Watts                                   |
| Access Type          | Doors                                       |
| BTU (LBP)            | 150 BTU                                     |
| Capacity             | 23.06 cu. ft.                               |
| Capacity (per Shelf) | 88 lb.                                      |
| Casters              | With Casters                                |
| Color                | Silver                                      |
| Compressor Location  | Bottom Mounted                              |
| Construction         | Stainless Steel and Aluminum                |
| Door Style           | Swing                                       |
| Door Type            | Glass                                       |
| Dutch Half Doors     | Without Dutch Half Doors                    |
| Features             | Magnetic Door Gaskets<br>Self-Closing Doors |
| Handle Material      | Aluminum Alloy                              |
| Hinge Location       | Right                                       |
| Horsepower           | 1/3 hp                                      |
| Installation Type    | Freestanding                                |
| Number of Doors      | 1 Doors                                     |
| Number of Shelves    | 3 Shelves                                   |
| Plug Type            | NEMA 5-15P                                  |
| Refrigerant Capacity | 4.2 oz.                                     |
| Refrigerant Type     | R-290                                       |
| Sections             | 1 Section                                   |
| Starting Amps        | 10.8 Amps                                   |
| Starting Wattage     | 1044 Watts                                  |
| Temperature Range    | 33 - 40 Degrees F                           |
| Type                 | Refrigerators                               |

## Plan View

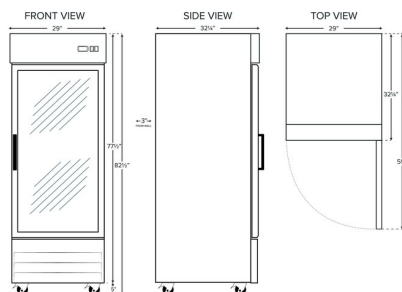



## Notes & Details

Your establishment relies on refrigeration for proper food safety, and you will receive performance you can depend on with this Avantco A-23R-G-HC 29" glass door refrigerator! A painted aluminum interior with a 304 stainless steel floor gives you increased durability, while a stainless steel exterior gives it a sleek appearance. Its front door features transparent glass, which easily displays products to customers or enables employees to spot the needed item before even opening up the fridge. For convenience, three epoxy-coated shelves, which hold up to 88 lb. each, feature shelf clips for customization when desired.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/3 hp compressor that Uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. It also opens up the top of your unit for additional storage space, if necessary. For optimal temperature retention, the entire cabinet utilizes foamed-in-place polyurethane insulation. Other helpful features include automatic defrosting and digital temperature control. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).