



Item #: 178AU48R Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco AU-48R 48" Undercounter Refrigerator

Item #178AU48R



Technical Data

Width	47 1/4 Inches
Depth	29 1/2 Inches
Height	35 1/4 Inches
Power Cord Length	7 Feet
Interior Width	43 5/16 Inches
Shelf Width	22 1/16 Inches
Interior Depth	25 Inches
Shelf Depth	22 3/16 Inches
Interior Height	26 1/8 Inches
Work Surface Height	35 1/4 Inches

Features

- 430 type stainless steel exterior and aluminum interior with 304 type stainless steel floor
- Compact, undercounter size takes up minimal space
- Easy-to-read digital temperature controller and auto-defrost function
- Self-closing and stay-open door features for easy loading and unloading
- Uses R-290 refrigerant; 115V, 1/3 hp

Certifications



5-15P




ETL Listed

Avantco Refrigeration

Technical Data

Amps	2.72 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	313 Watts
Access Type	Doors
BTU (LBP)	881 BTU
Capacity	13.98 cu. ft.
Capacity (per Shelf)	66.13999938964844 lb.
Casters	With Casters
Compressor Location	Rear Mounted
Compressor Style	Side / Rear Breathing
Construction	Stainless Steel and Aluminum
Door Style	Swing
Door Type	Solid
Features	Automatic Electric Defrost Digital Temperature Controller Magnetic Door Gaskets Self-Closing Doors Stay-Open Doors
Hinge Location	Left Right
Horsepower	1/3 hp
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Starting Wattage	329 Watts
Style	Counter Height
Temperature Range	33 - 40 Degrees F
Top Capacity	396 lb.
Type	Refrigerators Undercounter Refrigerators

Plan View

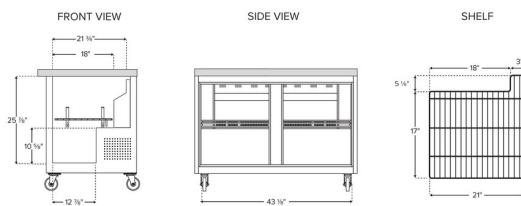

178AU48R



Notes & Details

Invest in this Avantco 48" undercounter refrigerator for a dependable cold food storage solution. With a spacious refrigerator portion readily accessible through its 2 doors, the unit opens up to 2 shelves that will aid in organizing your ingredients. Plus, because they each accommodate up to 66.14 lb., the included PVC-coated wire shelves are well-equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The painted aluminum interior with a 304 type stainless steel floor also offers the stability necessary for heavy, regular use. Because of its undercounter design, the refrigerator effortlessly adds cold storage space beneath a pre-existing countertop and doesn't require additional space for its own footprint. This makes the unit ideal for busy operations in need of storage, but tight on back-of-house space. Plus, it comes with 4 reliable casters, 2 of which are braking casters, for easy mobility around your establishment.

This unit ensures optimal performance by operating with a 1/3 hp refrigeration system that circulates R-290 refrigerant to maintain temperatures from 30 to 40 degrees Fahrenheit. R-290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps provide structural rigidity and maintain internal temperatures.

Operation of the refrigerator is easy, thanks to its special features. Monitor temperatures by consulting the interior wall-mounted thermometer and use the auto-defrost feature on the pre-programmed digital controller to keep the unit in excellent shape. Take advantage of the included casters and roll the unit aside to thoroughly clean the area as needed. This undercounter refrigerator requires a 115V electrical connection for operation and comes with a 7' power cord.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.