

Item #: 178GDC49BC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco GDC-49-HC 53" Black Swing Glass Door Merchandiser Refrigerator with LED Lighting and Customizable Panel

Item #178GDC49BC



Technical Data

Width	53 1/8 Inches
Depth	31 7/8 Inches
Height	83 7/8 Inches
Power Cord Length	96 Inches
Interior Width	50 Inches
Interior Depth	28 3/8 Inches
Interior Height	61 7/8 Inches
Amps	3.14 Amps
Phase	1 Phase
Voltage	115 Volts

Features

- 2 self-closing, anti-fog swing glass doors; great for displaying prepackaged food and drinks
- Temperature range of 33 to 40 degrees Fahrenheit
- R290 refrigerant
- Interior LED lighting; 4" casters
- 115V, 1/4 hp; 3.14 Amps

Certifications



5-15P



Customizable




ETL Listed

Technical Data

Access Type	Doors
BTU (LBP)	1285 BTU
Capacity	42.5 cu. ft.
Capacity (per Shelf)	90 lb.
Color	Black
Compressor Location	Bottom Mounted
Door Style	Swing
Door Type	Glass
Features	Customizable LED Lighting
Hinge Location	Left Right
Horsepower	1/4 hp
Installation Type	Freestanding
Interior Color	White
Number of Doors	2 Doors
Number of Shelves	8 Shelves
Plug Type	NEMA 5-15P
Refrigerant Type	R-290
Sections	2 Sections
Temperature Range	33 - 40 Degrees F
Type	Merchandising Refrigeration

Plan View

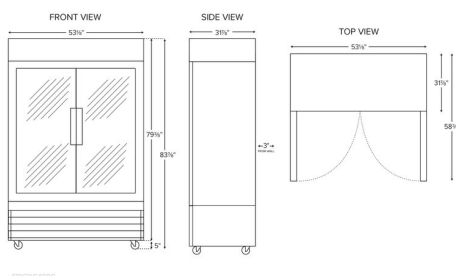

Notes & Details

Increase your sales of "grab and go" items like bottled tea and soda, or pre-packaged sandwiches and salads with this Avantco GDC-49-HC 53" black merchandising refrigerator! Designed with sharp looks and usability in mind, this unit is the perfect display for your products with its sleek black finish and a lighted top graphics area. And, since the housing is made from black coated steel, you can be sure that it will provide superior durability. Additionally, it boasts 2 anti-fogging glass swing doors to ensure that customers always have a clear view of your products, while 8 epoxy coated steel shelves help you stay organized. Each shelf can hold up to 90 lb. of product. Plus, the shelves easily adjust to accommodate changing inventory and menus. Interior LED lighting on the right side also works to illuminate and further merchandise your products.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/4 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include a self-closing mechanism on the doors, automatic defrosting, and a digital temperature control. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.