



Item #: 178GDICE49WC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco GD-ICE-49F 53" White Glass Door Ice Merchandiser with Customizable Panel

Item #178GDICE49WC



Technical Data

Width	53 1/8 Inches
Depth	31 15/16 Inches
Height	83 7/8 Inches
Power Cord Length	98 1/2 Inches
Interior Width	47 1/4 Inches
Interior Depth	27 Inches
Interior Height	58 1/4 Inches
Amps	6.97 Amps
Hertz	60 Hz
Phase	1 Phase

Features

- Easy-to-use digital temperature controls; interior LED lighting
- Holds approximately (90) 8 lb. bags of ice
- 115V, 1 1/2 hp; 6.97 Amps; R290 refrigerant
- 2 self-closing, triple-pane, argon-filled, anti-fog swing glass doors
- Temperature range: 18 to 25 degrees Fahrenheit

Certifications



5-20P



Customizable




ETL Listed

Intertek

Technical Data

Voltage	115 Volts
8 lb Bag Capacity	90 Bags
BTU (LBP)	2415 BTU
Capacity	36 cu. ft.
Compressor Location	Bottom Mounted
Door Style	Swing
Door Type	Glass
Features	Customizable LED Lighting
Horsepower	1 1/2 hp
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-20P
Refrigerant Type	R-290
Refrigeration Type	Auto Defrost
Temperature Range	18 - 25 Degrees F
Type	Ice Merchandisers
Usage	Indoor

Plan View

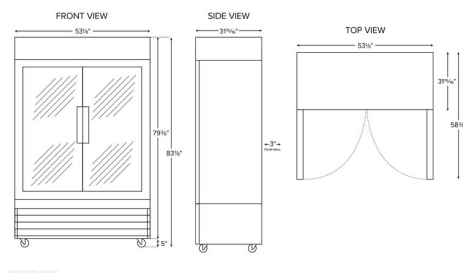

Notes & Details

Store and showcase your bagged ice offerings with this AvantcoGD-ICE-49F 53" black customizable ice merchandiser! Designed with sharp looks and usability in mind, this unit is the perfect display for your bags of ice with its sleek finish. And, since the housing is made from white coated steel, you can be sure that it will provide superior durability. This unit boasts an anti-fogging glass swing door to ensure that customers always have a clear view of your products, while 4 epoxy coated steel shelves help you stay organized. Plus, the shelves easily adjust to accommodate prepackaged foods in a variety of sizes. Interior LED lighting also works to illuminate and further merchandise your products.

Designed to maintain temperatures from 18 to 25 degrees Fahrenheit, this freezer boasts a bottom-mounted 1 1/2 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include a self-closing mechanism on the door, automatic defrosting, as well as a digital temperature control and display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.