

Item #: 178HBB50HC Project: _____

Qty: _____ Date: _____ Approval: _____

Avantco HBB-50-HC 50" Black Horizontal Bottle Cooler

Item #178HBB50HC



Technical Data

Width	49 1/2 Inches
Depth	28 Inches
Height	34 1/4 Inches
Power Cord Length	90 Inches
Interior Width	45 3/8 Inches
Interior Depth	23 Inches
Interior Height	26 Inches
Amps	2.5 Amps
Hertz	60 Hz
Phase	1 Phase

Features

- R290 hydrocarbon refrigerant
- Spacious 12.7 cu. ft. interior features 3 epoxy-coated dividers
- Includes 2 locking lids and comes with 1 removable bottle opener / cap catcher
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/4 hp

Certifications



5-15P




ETL Listed

Technical Data

Voltage	115 Volts
Wattage	264 Watts
Access Type	Doors
BTU (LBP)	666 BTU
Capacity	12.7 cu. ft.
Compressor Location	Side Mounted
Compressor Style	Side / Rear Breathing
Construction	Aluminum Steel
Exterior Finish	Black
Horsepower	1/4 hp
Lid Style	Sliding
Lid Type	Solid
Number of 12 oz. Bottles	208 Bottles
Number of 12 oz. Cans	308 Cans
Number of Dividers	3 Dividers
Number of Lids	2 Lids
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.4 oz.
Refrigerant Type	R-290
Starting Amps	7.5 Amps
Starting Wattage	792 Watts
Temperature Range	33 - 40 Degrees F

Plan View

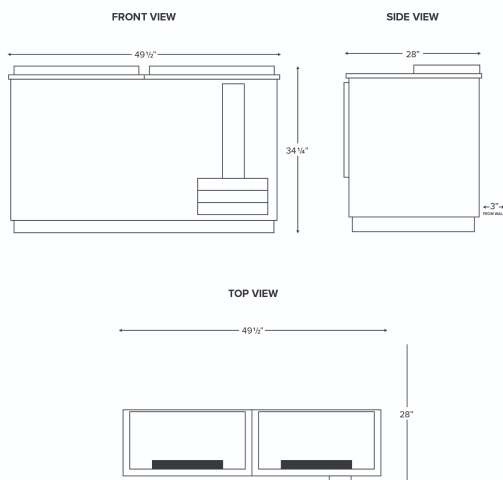



Notes & Details

Keep bottles of beer or soda on hand at all times by storing them in this Avantco 50" bottle cooler! Maintaining temperatures from 33 to 40 degrees, the cooler provides 12.7 cu. ft. of interior storage to ensure that a wide supply of bottles are kept cold and ready for thirsty customers. It even features 3 plastic coated dividers inside to keep bottles organized and readily accessible. For your utmost convenience, a bottle opener / cap catcher is included with the unit. Just grab a beer, use the opener, and serve!

This unit is designed for outstanding durability to ensure that it withstands service through even your busiest days and nights. It features a black epoxy-coated steel exterior and a painted aluminum interior. Two stainless steel lids open and close with ease, making for easy drink retrieval. Because they lock, the lids also secure your beverage selection, making sure that your supply is always safe.

This cooler guarantees optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. Plus, the foamed-in-place polyurethane insulation adds rigidity and promote proper temperatures. This ensures that all beverages held in the unit are at the perfect serving temperature.

You can adjust the cooler with the digital temperature controller as needed, and maintain the unit with its auto-defrost function. This unit requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.