

Item #: 178SSUC27RA Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UC-27R-HC 27" Stainless Steel ADA Height Undercounter Refrigerator

Item #178SSUC27RA



### Technical Data

|                     |               |
|---------------------|---------------|
| Width               | 27 Inches     |
| Depth               | 29 1/2 Inches |
| Height              | 33 5/8 Inches |
| Power Cord Length   | 84 Inches     |
| Interior Width      | 22 1/4 Inches |
| Interior Depth      | 22 7/8 Inches |
| Interior Height     | 23 1/2 Inches |
| Work Surface Height | 33 5/8 Inches |
| Amps                | 2.2 Amps      |
| Hertz               | 60 Hz         |

### Features

- 2 1/2" casters make moving simple for easy cleaning and make the unit an ADA-compliant height
- Strong and sleek type 430 stainless steel exterior and type 304 stainless steel interior
- Foamed-in-place polyurethane maintains temperatures from 33 to 40 degrees Fahrenheit
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/4 hp
- Note: only the undercounter refrigerator holds the ETL certification

### Certifications



5-15P



ADA Compliant




ETL Listed

## Technical Data

|                      |                                             |
|----------------------|---------------------------------------------|
| Phase                | 1 Phase                                     |
| Voltage              | 115 Volts                                   |
| Wattage              | 210 Watts                                   |
| Access Type          | Doors                                       |
| Backsplash           | Without Backsplash                          |
| BTU (LBP)            | 666 BTU                                     |
| Capacity             | 5.5 cu. ft.                                 |
| Capacity (per Shelf) | 88 lb.                                      |
| Color                | Silver                                      |
| Door Style           | Swing                                       |
| Door Type            | Solid                                       |
| Features             | ADA Compliant<br>Magnetic Door Gaskets      |
| Horsepower           | 1/4 hp                                      |
| Number of Doors      | 1 Doors                                     |
| Number of Shelves    | 1 Shelf                                     |
| Plug Type            | NEMA 5-15P                                  |
| Refrigerant Type     | R-290                                       |
| Starting Amps        | 6.6 Amps                                    |
| Starting Wattage     | 630 Watts                                   |
| Style                | ADA Height                                  |
| Temperature Range    | 33 - 40 Degrees F                           |
| Top Capacity         | 318 lb.                                     |
| Type                 | Refrigerators<br>Undercounter Refrigerators |

## Plan View

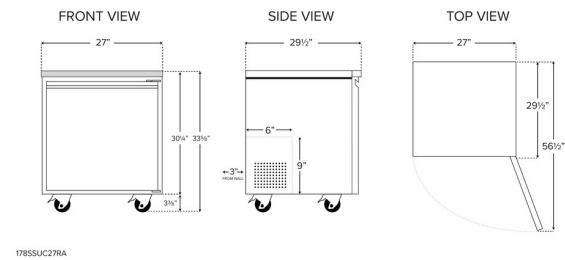



## Notes & Details

Make cold food storage as convenient as possible with the Avantco 27" undercounter refrigerator. With a spacious refrigerated portion readily accessible through its door, the unit opens up to a shelf to help you organize your ingredients and best utilize the 5.5 cu. ft. interior. Plus, because it accommodates up to 88 lb., the epoxy-coated steel shelf is well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint. This unit features a field reversible door (reversible hinge hardware sold separately) to make adjusting this unit to your workflow easier.

This refrigerator ensures optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to add rigidity to the body's structure.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).