

Item #: 178SSUC36RA Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UC-36R-HC 36" Stainless Steel ADA Height Undercounter Refrigerator

Item #178SSUC36RA



### Technical Data

|                     |               |
|---------------------|---------------|
| Width               | 36 1/4 Inches |
| Depth               | 29 1/2 Inches |
| Height              | 33 5/8 Inches |
| Power Cord Length   | 84 Inches     |
| Interior Width      | 33 Inches     |
| Interior Depth      | 22 7/8 Inches |
| Interior Height     | 23 1/2 Inches |
| Work Surface Height | 33 5/8 Inches |
| Amps                | 2.3 Amps      |
| Hertz               | 60 Hz         |

### Features

- 2 1/2" casters bring the unit to an ADA-compliant working height
- Strong and sleek type 430 stainless steel exterior and type 304 stainless steel interior
- Foamed-in-place polyurethane maintains temperatures from 33 to 40 degrees F
- Easy-to-read digital temperature controller and auto-defrost function
- 115V; 1/4 hp
- Note: only the undercounter refrigerator holds the ETL certification

### Certifications



ADA Compliant



5-15P




ETL Listed

## Technical Data

|                   |                                             |
|-------------------|---------------------------------------------|
| Phase             | 1 Phase                                     |
| Voltage           | 115 Volts                                   |
| Wattage           | 250 Watts                                   |
| Access Type       | Doors                                       |
| Backsplash        | Without Backsplash                          |
| BTU (LBP)         | 666 BTU                                     |
| Capacity          | 8.2 cu. ft.                                 |
| Color             | Silver                                      |
| Door Style        | Swing                                       |
| Door Type         | Solid                                       |
| Features          | ADA Compliant<br>Magnetic Door Gaskets      |
| Horsepower        | 1/4 hp                                      |
| Number of Doors   | 2 Doors                                     |
| Number of Shelves | 2 Shelves                                   |
| Plug Type         | NEMA 5-15P                                  |
| Refrigerant Type  | R-290                                       |
| Starting Amps     | 6.9 Amps                                    |
| Starting Wattage  | 750 Watts                                   |
| Style             | ADA Height                                  |
| Temperature Range | 33 - 40 Degrees F                           |
| Top Capacity      | 318 lb.                                     |
| Type              | Refrigerators<br>Undercounter Refrigerators |

## Plan View

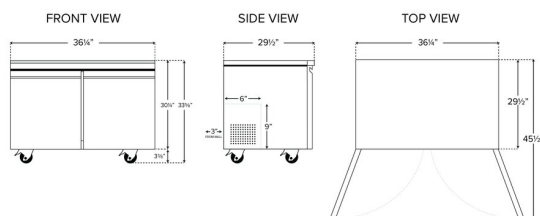

178SSUC36RA



## Notes & Details

Make cold food storage as convenient as possible with the Avantco 36" undercounter refrigerator. With a spacious refrigerated portion readily accessible through its two doors, the unit opens up to two shelves to help you organize your ingredients and best utilize the interior space. Plus, because each accommodate up to 90 lb., the epoxy-coated steel shelves are well equipped for holding heavy bulk ingredients, from dozens of eggs to jars of condiments and sauces.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a type 430 stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with type 304 stainless steel, also offers the durability necessary for heavy, regular use. Because of its low, undercounter design, the unit can effortlessly add refrigerated storage space without requiring space devoted solely to its footprint. For long-lasting quality assurance and peace of mind, this unit also comes with a 2 year Parts and Labor Warranty.

This refrigerator ensures optimal performance by operating with a 1/4 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to add rigidity to the body's structure.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).