

Item #: 178SSUD260RD Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco SS-UD-260RD 60" Stainless Steel Extra Deep Undercounter Refrigerator with 2 Left Drawers and 1 Door

Item #178SSUD260RD



### Technical Data

|                   |                           |
|-------------------|---------------------------|
| Width             | 60 Inches                 |
| Depth             | 31 1/2 Inches             |
| Height            | 34 7/16 Inches            |
| Power Cord Length | 98 Inches                 |
| Interior Width    | 39 11/16 Inches           |
| Packaging Width   | 96 9/16 Inches            |
| Shelf Width       | 23.149999618530273 Inches |
| Interior Depth    | 26 3/16 Inches            |
| Packaging Depth   | 34 1/4 Inches             |
| Shelf Depth       | 24 2/5 Inches             |

### Features

- Strong and sleek type 430 stainless steel exterior with type 304 stainless steel interior
- Side mounted compressor and digital temperature controller allow for greater depth of storage
- Cabinet section can accept full size bun pans
- Includes 2 left-side drawers and 6 assorted divider bars to fit full size and fractional pans
- 115V; 2/5 hp
- Note: only the undercounter refrigerator holds the ETL certification

### Certifications



5-15P




ETL Listed

## Technical Data

|                             |                                                                                                                                                           |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interior Height             | 22 7/8 Inches                                                                                                                                             |
| Packaging Height            | 36 1/4 Inches                                                                                                                                             |
| Work Surface Height         | 35 1/4 Inches                                                                                                                                             |
| Amps                        | 5.1 Amps                                                                                                                                                  |
| Hertz                       | 60 Hz                                                                                                                                                     |
| Phase                       | 1 Phase                                                                                                                                                   |
| Voltage                     | 115 Volts                                                                                                                                                 |
| Wattage                     | 439 Watts                                                                                                                                                 |
| Access Type                 | Doors and Drawers                                                                                                                                         |
| BTU (LBP)                   | 631 BTU                                                                                                                                                   |
| Capacity                    | 13.1 cu. ft.                                                                                                                                              |
| Capacity (per Shelf)        | 90 lb.                                                                                                                                                    |
| Compressor Style            | Side / Rear Breathing                                                                                                                                     |
| Door Style                  | Swing                                                                                                                                                     |
| Door Type                   | Solid                                                                                                                                                     |
| Features                    | Automatic Electric Defrost<br>Digital Temperature Controller<br>Magnetic Door Gaskets<br>Magnetic Drawer Gaskets<br>Self-Closing Doors<br>Stay-Open Doors |
| Hinge Location              | Right                                                                                                                                                     |
| Horsepower                  | 2/5 hp                                                                                                                                                    |
| Insulation Material         | Polyurethane Foam                                                                                                                                         |
| Material                    | Stainless Steel                                                                                                                                           |
| Maximum Ambient Temperature | 90 Degrees F                                                                                                                                              |
| Net Weight                  | 220 lb.                                                                                                                                                   |
| Number of Doors             | 1 Doors                                                                                                                                                   |
| Number of Drawers           | 2 Drawers                                                                                                                                                 |
| Number of Shelves           | 1 Shelf                                                                                                                                                   |
| Plug Type                   | NEMA 5-15P                                                                                                                                                |
| Refrigerant Type            | R-290                                                                                                                                                     |
| Starting Amps               | 15.3 Amps                                                                                                                                                 |
| Starting Wattage            | 1317 Watts                                                                                                                                                |
| Style                       | Counter Height                                                                                                                                            |
| Temperature Range           | 33 - 40 Degrees F                                                                                                                                         |
| Top Capacity                | 353 lb.                                                                                                                                                   |
| Type                        | Refrigerators<br>Undercounter Refrigerators                                                                                                               |

## Plan View

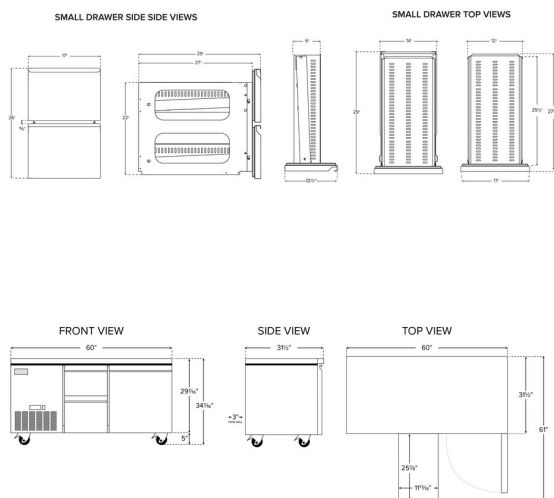

## Notes & Details

Make cold food storage as convenient as possible with the Avantco SS-UD-260RD 60" extra deep undercounter refrigerator. With a spacious refrigerated portion readily accessible through 2 drawers on the left and a door on the right, the 13.1 cu. ft. unit helps you organize your ingredients. While the door section features an epoxy-coated shelf, the drawers include a total of 6 assorted divider bars. These fit in the drawers where they act as braces for full size or fractional pans. Easily reconfigure or remove the braces to best suit your inventory. Drawers provide excellent organization for your food pans and can help maximize your kitchen's workflow. Drawers also allow you to quickly pull ingredients for faster operation and ease of use.

This unit is designed for outstanding durability to ensure that it withstands tough, busy kitchen environments with ease. It features a 430 type stainless steel exterior, which provides both strength and a smooth, sleek appearance. The interior, made with 304 type stainless steel, also offers the durability necessary for heavy, regular use. Because of its undercounter design, the unit effortlessly adds refrigerated storage space without requiring space devoted solely to its footprint.

This refrigerator ensures optimal performance by operating with a 2/5 hp refrigeration system that circulates R290 hydrocarbon refrigerant to maintain temperatures from 33 to 40 degrees Fahrenheit. R290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. The foamed-in-place polyurethane insulation helps to trap in the cold air and to prevent the ambient air from entering. This ensures that all food held in the unit remains at food safe temperatures and ready for preparation or direct service to customers. The side-mounted compressor allows for greater depth of storage over rear-mounted units.

Operation of the refrigerator is easy, thanks to its special features. Monitor it by consulting the interior wall-mounted thermometer, and use the auto-defrost feature on the pre-programmed digital controller to maintain the refrigerator in tip-top shape. At the end of the day, take advantage of the casters and roll the unit aside to thoroughly clean the area. This undercounter unit requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).