




Item #: 178UDD608 Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco UDD-60-HC (2) Four Tap Shallow Depth Kegerator Beer Dispenser - Black, (2) 1/2 Keg Capacity

Item #178UDD608



### Technical Data

|                   |                 |
|-------------------|-----------------|
| Width             | 60 3/4 Inches   |
| Depth             | 24 7/16 Inches  |
| Height            | 35 5/8 Inches   |
| Power Cord Length | 108 Inches      |
| Interior Width    | 48 1/4 Inches   |
| Shelf Width       | 23 5/8 Inches   |
| Interior Depth    | 18 1/2 Inches   |
| Nominal Depth     | Narrow          |
| Shelf Depth       | 17 15/16 Inches |
| Faucet Height     | 10 1/4 Inches   |

### Features

- 2 shelves included for optional bottle and can storage for increased versatility
- (2) 4-tap towers with 10 1/4" faucet height
- Energy efficient LED interior lighting
- Includes (8) "D" system couplers and keg mat
- 115V; 3/7 hp; R-290 refrigerant
- Note: only the kegerator holds the ETL certification

### Certifications



ETL Listed




5-15P

Avantco Refrigeration

## Technical Data

|                     |                                       |
|---------------------|---------------------------------------|
| Interior Height     | 28 7/8 Inches                         |
| Tap Tower Height    | 16 Inches                             |
| Tap Tower Diameter  | 3 Inches                              |
| Amps                | 3.5 Amps                              |
| Phase               | 1 Phase                               |
| Voltage             | 115 Volts                             |
| Wattage             | 325 Watts                             |
| Compressor Location | Left Side Mounted                     |
| Door Type           | Solid                                 |
| Exterior Finish     | Black                                 |
| Features            | LED Lighting<br>Magnetic Door Gaskets |
| Horsepower          | 3/7 hp                                |
| Number of Doors     | 2 Doors                               |
| Number of Kegs      | 2 Kegs                                |
| Number of Taps      | 8+ Taps                               |
| Plug Type           | NEMA 5-15P                            |
| Refrigerant Type    | R-290                                 |
| Starting Amps       | 10.5 Amps                             |
| Starting Wattage    | 975 Watts                             |
| Style               | 1/2 Barrel                            |
| Top Capacity        | 353 lb.                               |
| Type                | Kegeators / Beer Dispensers           |

## Plan View

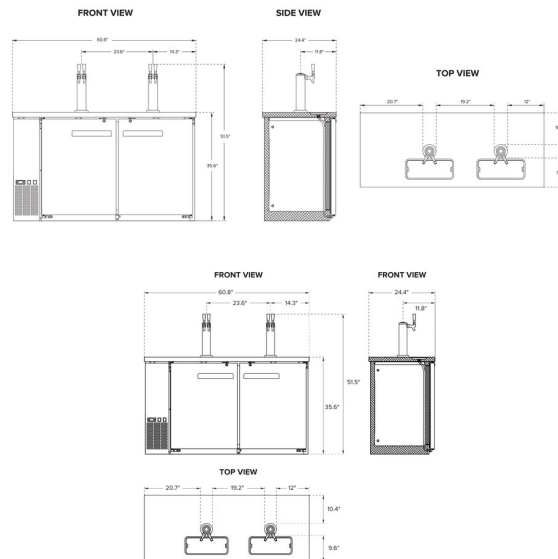



## Notes & Details

Whether you operate a pub, banquet hall, catering service, or facilitate other special events, this Avantco UDD-60-HC (2) four tap beer dispenser is an excellent way to offer crisp, refreshing draft beer to your guests without investing in a complex built-in tap system! This unit features (2) four tap towers with a 10 1/4" faucet height that allows you to easily fill pint glasses and pitchers with local microbrews, international macrobrews, and everything in between. It holds (2) 1/2 kegs so you can stock up on one brew or offer customers a selection to choose from, and it even comes with 2 shelves for optional bottle or can storage while concealing the product behind 2 solid doors. The doors themselves are not only self-closing to prevent potential energy loss, but also lock to prevent theft during off hours. This unit is equipped with knockout plugs to install external CO2 lines.

Unlike many competitive beer dispensers, this model ships with 8 couplers so that you can tap kegs right out of the box! This commercial kegerator features a black coated steel exterior and a 304 type stainless steel interior that is both durable and easy to clean, while a built-in drip tray further expedites end-of-day cleaning. It has a 3/7 hp refrigeration system that circulates R-290 hydrocarbon refrigerant. R-290 refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. A 115V electrical connection is required for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).