

## Product Specifications

### Refrigerated Self-Service Case 32"D



MODEL SHOWN: B4732-QS



- ☐ B3632-QS
- ☐ B4732-QS
- ☐ B5932-QS
- ☐ B7132-QS
- ☐ B8832-QS

Lengths include end panels

- 36-5/8"L x 32-1/4"D x 82-1/2"H
- 47-5/8"L x 32-1/4"D x 82-1/2"H
- 59-5/8"L x 32-1/4"D x 82-1/2"H
- 71-5/8"L x 32-1/4"D x 82-1/2"H
- 88-3/8"L x 32-1/4"D x 82-1/2"H

#### STANDARD FEATURES

- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- Compressor air lower front intake and upper front discharge.  
Front panel cannot be blocked
- Condensate pan (self-contained refrig. only)
- Flat upper front panel & header
- Integrated average product temperature of 40°F or less
- LED 4000K top light(s)
- One piece formed ABS plastic tub (n/a B8832)
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers
- Solid back panel, black


| Features                  | Standard                                                                                      | Options                                                                           |
|---------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| EXTERIOR COLOR            | <input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction              | <input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction      |
| INTERIOR COLOR            | <input type="checkbox"/> Black                                                                |                                                                                   |
| LWR PERFORATED FRNT PANEL | <input type="checkbox"/> Painted - Black                                                      |                                                                                   |
| BASE                      | <input type="checkbox"/> Casters w/ levelers                                                  |                                                                                   |
| END PANEL LEFT            | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color) |                                                                                   |
| END PANEL RIGHT           | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color) |                                                                                   |
| SHELVING                  | <input type="checkbox"/> Metal shelves, non-lighted                                           | <input type="checkbox"/> Metal shelves, lighted (LED 4000K)                       |
| ELECTRICAL CONNECT        | <input type="checkbox"/> 6' power cord (base exit)                                            |                                                                                   |
| REFRIGERATION             | <input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration                   |                                                                                   |
| MISCELLANEOUS             |                                                                                               | <input type="checkbox"/> Second year parts & labor warranty (excludes compressor) |

## Product Specifications

**Intended Environment:** Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
|------|----------------------------------|---------------------------|
| 1    | Packaged refrigerated products   | 40                        |

PLAN VIEW

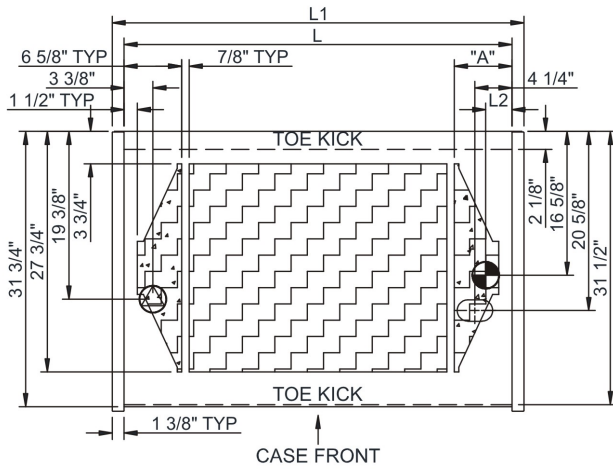


|       | "A"     |
|-------|---------|
| B3632 | 6 5/8"  |
| B4732 | 6 5/8"  |
| B5932 | 6 5/8"  |
| B7132 | 14 1/8" |
| B8832 | 17 3/4" |

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>

SIDE VIEW

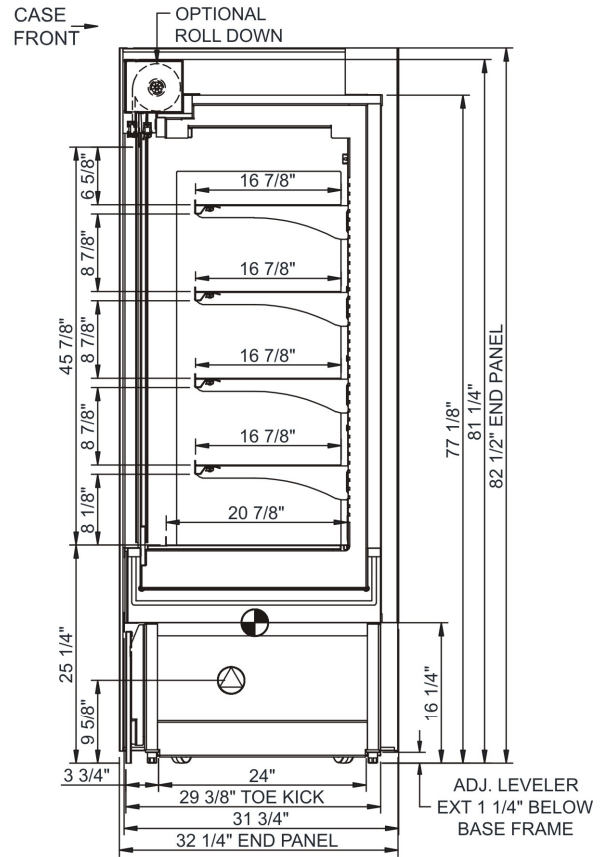

Model Technical Specifications

| Model    | L"  | L1"   | L2"  | System         | Circuit Volts      | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug       | SST | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |
|----------|-----|-------|------|----------------|--------------------|-----|------|----------|-------|-------|-----------------|-----|-----------------|-----------------|--------|
| B3632-QS | N/A | 36.63 | 3.13 | Self-Contained | Circuit #1 110-120 | 1   | 60   | 16.00    | 1,371 | 2+G   | 5-20P or L5-20P | N/A | N/A             | N/A             | 850    |
| B4732-QS | N/A | 47.63 | 3.13 | Self-Contained | Circuit #1 208-240 | 1   | 60   | 9.55     | 1,750 | 2+G   | 6-20P or L6-20P | N/A | N/A             | N/A             | 900    |
| B5932-QS | N/A | 59.63 | 3.13 | Self-Contained | Circuit #1 208-240 | 1   | 60   | 11.49    | 2,124 | 2+G   | 6-20P or L6-20P | N/A | N/A             | N/A             | 1,100  |
| B7132-QS | N/A | 71.63 | 3.13 | Self-Contained | Circuit #1 208-240 | 1   | 60   | 15.31    | 2,901 | 2+G   | 6-20P or L6-20P | N/A | N/A             | N/A             | 1,300  |
| B8832-QS | N/A | 88.38 | 3.13 | Self-Contained | Circuit #1 208-240 | 1   | 60   | 20.41    | 2,901 | 2+G   | 6-30P or L6-30P | N/A | N/A             | N/A             | 1,550  |

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
 Energy Efficiency  
 Compliant

### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 6) Tile floors, low ceilings, or small rooms will increase noise level.

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).