

**Cooking Performance Group G-CPG-48-M 48"
Electric Countertop Griddle - 12 kW / 16 kW,
208 / 240V**



Intertek

Approval: _____ Date: _____

- Durable 1" thick polished steel griddle plate and all stainless steel construction
- 48" wide and 20 7/8" deep plate with 4" splash guards provide a greater cooking surface
- 4 adjustable non-skid feet constructed of stainless steel
- Full width trough and 4.5 qt. grease drawer are easy to remove and clean
- 3,000 / 4,000W (208 / 240) of power and 1 thermostatic control per every 12" cooking section

Width	47 5/8 Inches
Depth	29 Inches
Height	15 9/16 Inches
Cooking Surface Width	47 5/8 Inches
Cooking Surface Depth	20 7/8 Inches
Backsplash Height	4 Inches
Hertz	60 Hz
Phase	1 - 3 Phase
Voltage	208/240 Volts
Wattage	12 - 16 Kilowatts

Cooking Performance Group G-CPG-48-M 48"
Electric Countertop Griddle - 12 kW / 16 kW,
208 / 240V



Technical Data


Connection Type	Hardwired
Control Type	Thermostatic
Cooking Surface Material	Steel
Features	With Feet
Grease Tray Size	4.26 Liters
Installation Type	Countertop
Number of Burners	4 Burners
Number of Controls	4 Controls
Plate Thickness	1 Inch
Plug Type	Hardwire
Power Type	Electric
Temperature Range	150 - 450 Degrees F
Temperature Settings	Adjustable
Usage	Standard Duty

351GCPG48M


Cooking Performance Group G-CPG-48-M 48"
Electric Countertop Griddle - 12 kW / 16 kW,
208 / 240V




Plan View

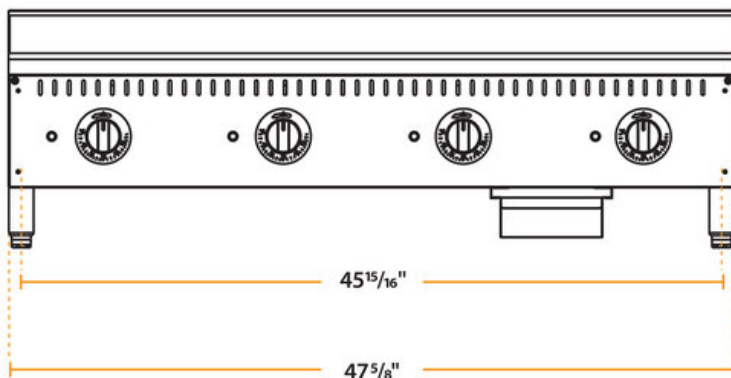

FRONT

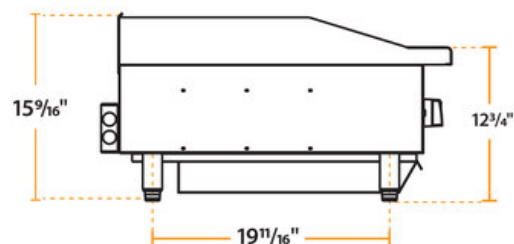

SIDE

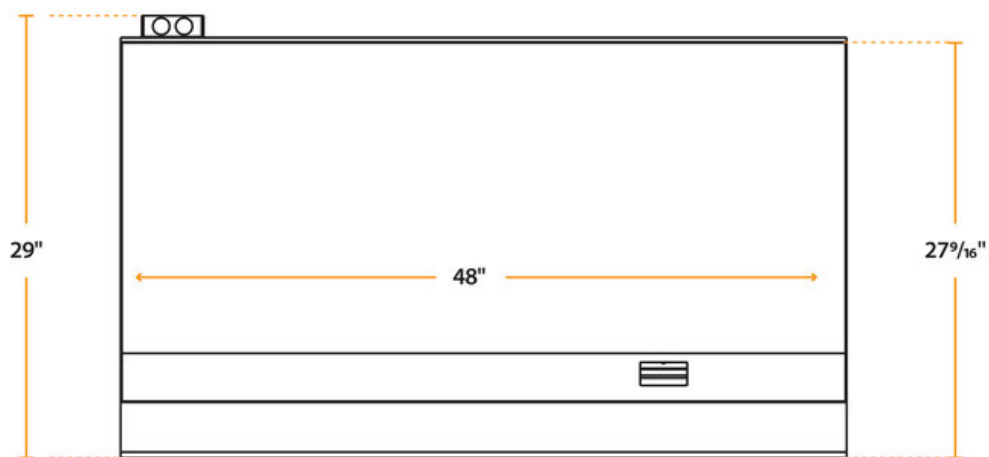

TOP

Cooking Performance Group G-CPG-48-M 48" Electric Countertop Griddle - 12 kW / 16 kW, 208 / 240V



Notes & Details

Make cooking breakfast and lunch easy with this Cooking Performance Group G-CPG-48-M 48" electric countertop griddle. Great for cooking burgers, bacon, cheesesteaks, and other grilled favorites, this countertop griddle provides you with versatility and convenience. Countertop griddles are great for compact spaces like eateries, diners, and take-out restaurants!

This griddle features a durable 1" thick polished steel griddle plate and an all stainless steel construction. For added convenience, the 4 heavy-duty, non-skid feet on this unit are adjustable and constructed of stainless steel and provide additional stability to this countertop unit. With 4" fully welded back and side splash guards to protect your walls and counters, you'll maintain a safe and clean work environment.

Boasting 12,000W / 16,000W (208 / 240V) total power, this 48" griddle has a 3,000W / 4,000W (208 / 240V) of power and 1 thermostatic control per every 12" cooking section, while the 20 7/8" deep plate provides a greater cooking surface and impressive recovery time. Thanks to the full width grease trough, cleanup is easy. The 4.5 qt. grease drawer is easy to remove and clean. To increase safety, a handy indicator light will illuminate to indicate when each thermostat is turned on, and when the griddle plate reaches the desired temperature, the elements will turn off for that section and the indicator light will go off.

You can control the temperature to cook foods to your exact specifications with its snap-action thermostatic controls that range between 150 and 450 degrees Fahrenheit. This griddle has 1 thermostat for every 12" section of griddle, and each thermostat independently controls the temperature of the 12" wide section, allowing you to set different temperatures for recipe requirements or cooking / holding applications. This Cooking Performance Group series of electric griddles may be wired for operation in the field or for 1 or 3 phase power supplies by making line connections at the junction box at the rear of the unit. Units must be hard-wired at installation for 1 and 3 phase service and requires 208 / 240V electrical connection.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.