



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
MODEL # \_\_\_\_\_  
AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
APPROVED: \_\_\_\_\_

**DELI/PIZZA PREP TABLES**

## DELI/PIZZA PREP TABLES

### Model: DPD67HC-3

THREE DRAWER ONE DOOR



### OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Clear lid
- Overshelf kits
- Additional shelves
- Shelf clips
- Pan support
- Door lock
- Composite cutting board
- Thermometer
- Night cover
- Bun tray rack
- 6" Casters
- 6" Legs black or seismic/flanged
- Remote option\* (see note on back page)

### 7 YEAR WARRANTY

Parts, Labor, and Compressor

### CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, drawers and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Aluminum top interior liner prevents spill from falling into cabinet
- Stainless steel top
- Removable hoods and insulated lid assemblies are made of matching stainless steel
- Self-closing doors with 120° stay-open feature on cam-lift hinges
- Magnetic gaskets provide positive seal on both door and drawers
- Field reversible doors
- 3" Casters, 2 with brakes standard
- 19" Wide reversible cutting board is removable for easy cleaning
- Two (2) epoxy-coated steel wire shelves
- Units will accept pans up to 6" deep (pans are not included)
- Drawer frames are heavy-duty stainless steel
- 12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs
- Telescoping slides, with locking mechanism to prevent drawers from being pulled off of cabinet
- Heavy-duty pan locking divider supports are standard in drawers
- Compressor available on left or right, specify at time of unit order

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Enhanced airflow maintains temperature between 36° to 38°F

3779 Champion Blvd., Winston-Salem, NC 27105  
888-845-9800 Fax: 336-245-6453  
Beverage-Air.com Sales@bevair.com




Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

Specifications are subject to change without prior notice.  
Date Issued 4/26 Printed in U.S.A.


# BEVERAGE-AIR®

## Deli/Pizza Prep Tables Model: DPD67HC-3


PLAN VIEW

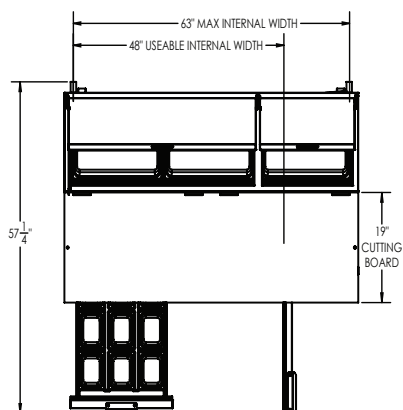

ELEVATION VIEW

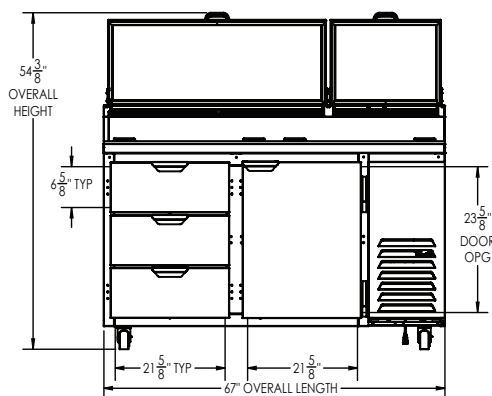

SIDE VIEW

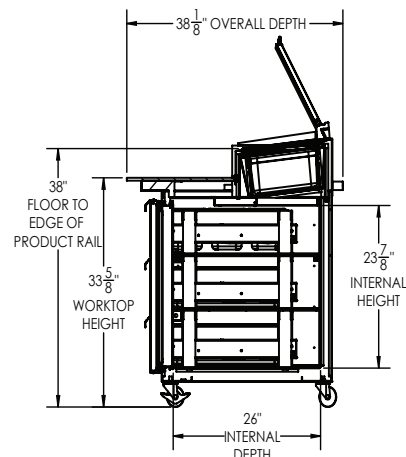

Required Clearance: 3" Bottom & 2" Rear

### EXTERNAL DIMENSIONAL DATA

|                      |                   |
|----------------------|-------------------|
| Width Overall (in)   | 67"               |
| Depth Overall (in)   | 38 1/8"           |
| Height Overall (in)  | 54 3/8"           |
| Number of Doors      | 1                 |
| Number of Drawers    | 3                 |
| Door opening (in.)   | 21 5/8" x 23 5/8" |
| Depth, Cutting Board | 19"               |

### INTERNAL DIMENSIONAL DATA

|                              |                  |
|------------------------------|------------------|
| NET Capacity (cubic ft.)     | 20.7             |
| Internal Width Overall (in)  | 63"              |
| Internal Width Usable (in)   | 48"              |
| Internal Depth Overall (in)  | 26"              |
| Internal Height Overall (in) | 23 7/8"          |
| Number of Shelves            | 2                |
| Depth with Drawers Extended  | 57 1/4"          |
| Drawers Openings             | 21 5/8" x 6 5/8" |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 4.5      |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                    |
|---------------------------|--------------------|
| Horsepower                | 1/3                |
| Capacity (BTU/Hr)         | 2940               |
| Heat Rejection (BTU/Hr)   | 4410               |
| Charge (lbs/grams/ounces) | 0.2315 / 105 / 3.7 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 484 lbs. |
| Height - Crated (in)  | 49"      |
| Width - Crated (in)   | 70"      |
| Depth - Crated (in)   | 40"      |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 4/26 | Printed in U.S.A.