

GARLAND®

Master Series Even-Heat Hot Top Range Attachment with Flame- Failure & Electronic Ignition

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- MST6S-E
- MST6T-E



MST6S-E
Shown with Optional
Low-Profile Backguard

Standard Features

- Stainless steel front and sides
- Stainless steel door on storage base
- 6" (152mm) chromed steel adjustable legs
- 7-1/2" (191mm) stainless steel front rail
- Extra heavy cast-iron top sections
- Stainless steel burner box bottom
- Storage base interior of aluminized steel
- 17" (432mm) wide even-heat hot top steel plate
- One 27,000 BTU (7.90 kW) "H" style cast iron burner
- Electric spark ignition on all pilots
- Flame-failure protection for all burners

Options & Accessories

- Stainless steel common front rail up to 102" (2591mm) wide (two or more units in a battery)
- Stainless steel main back
- Gas regulator 3/4" or 1-1/4"
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5') w/ restraining device, please specify
- Rear gas connection, 3/4" or 1" NPT
- End caps and cover (NC, specify)
- Polyurethane non-marking swivel casters (4) w/front brakes
- 6" (152mm) stainless steel adjustable legs
- Modular stand, (T model)
- Dais base (W/O legs, S model)
- Storage base shelf of aluminized or stainless steel
- Stainless steel tubular high shelf, single or double-deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm) H
- 230 volt, 50 cycle components electric ignition (export)

Specifications

Heavy-duty gas range attachment with storage base, Model MST6S-E. One (1) even-heat hot top. 17" (432mm) wide x 38" (965mm) deep, including 7 1/2" (191mm) deep stainless steel front rail. Stainless steel front and sides. 27,000 BTU (7.90 kW) total. Natural or propane gas. Flame-failure protection for all burners. Also available with modular top, suffix T.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.

NOTE: All Master Series ranges, attachments, fryers, and broilers require a high shelf or backguard flue attachment - sold separately.




Master Series Even-Heat Hot Top Range Attachment
with Flame-Failure & Electronic Ignition

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6908E
11/25



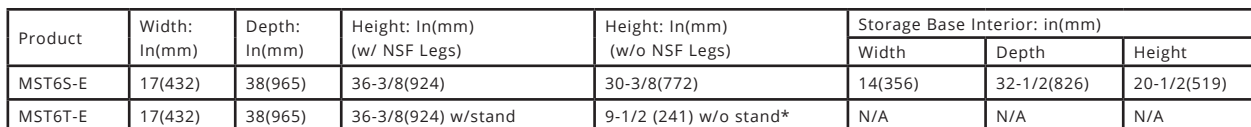

INPUT-BTU/hr (Natural or Propane Gas)	MST6S-E	MST6T-E
Total Top Sections	27,000 (7.90kW)	27,000 (7.90kW)

Installation Notes			Shipping Wt: (Lb/Kg) – Cu Ft
Combustible Wall Clearances ¹	Entry Clearances	Operating Pressure	
Sides: 14" (356mm) Back: 6" (152mm)	Crated: 22 1/4" (565mm) Uncrated: 17-1/4" (438mm)	Natural: 6" WC (15mbar) Propane: 10" WC (25mbar)	MST6S-E 240/109 – 26 MST6T-E 145/66 – 9

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications



an AI Group Company