

Instinct Induction Dual Warming Hob

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Instinct Induction Dual Warming Hob

Models

- GI-HO1500

powered by
INDUCS



HO1500

Standard Features

Induction generator:

- A generator, developed specifically for heat retaining/holding, built in an aluminum enclosure, which includes an integrated air fan.
- Fresh air is supplied by the fan, located at the bottom of the unit. The unit is also equipped with an air guiding system that directs the hot air out of the housing.

Heat retaining plate:

- The heat retaining plate is equipped with the latest RTCsmp sensor technology which enables temperature controls in real-time
- The set temperature is displayed via a 7-segment display underneath the ceramic glass.
- The heat retaining plate includes five (5) temperature sensors per zone.
- The unit has two zones that can be controlled at different temperatures.

Control unit:

- The control switches are located on the bottom of the unit, easy accessible

- for the user.
- The control unit regulates the temperature in an increment of 5°F (1°C) and this from 122-212°F (50 to 100°C). The set temperature and the current temperature are shown via the 7-segment display that is located underneath the ceramic glass.
- Safety above all:
 - RTCsmp electronic temperature control that monitors the state of the induction coil, power board, CPU and the ceramic glass temperature.
 - RTCsmp monitors the energy supply.
 - No Pan No Heat – Only if an induction suitable pan is located on the glass that energy will be consumed.

Advanced Features

- RTCsmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter
- Quiet ventilation for less noise

Specifications

The heat retaining plate is equipped with the latest RTCsmp sensor technology which enables temperature controls in real-time.

The set temperature is displayed via a digital display underneath the ceramic glass.

The heat retaining plate includes five (5) temperature sensors per zone.

The unit has two zones that can be controlled at different temperatures from 122-212°F (50 to 100°C)

Automatic pan detection to vary the operating frequency to match the quality of the pan being used

Automatic shut-off feature prohibits overheating.

Warranty: 2 years on parts & labor (US and Canada only).

NOTE: Induction cooking requires use of induction-compatible cookware.

compatible cookware.

North American models: ETL listed in compliance with, CSA C22.2 No.109, NSF-4 Complies with FCC part 18, ICES-001, UL-197.




Intertek



Intertek



Instinct Induction Dual Warming Hob

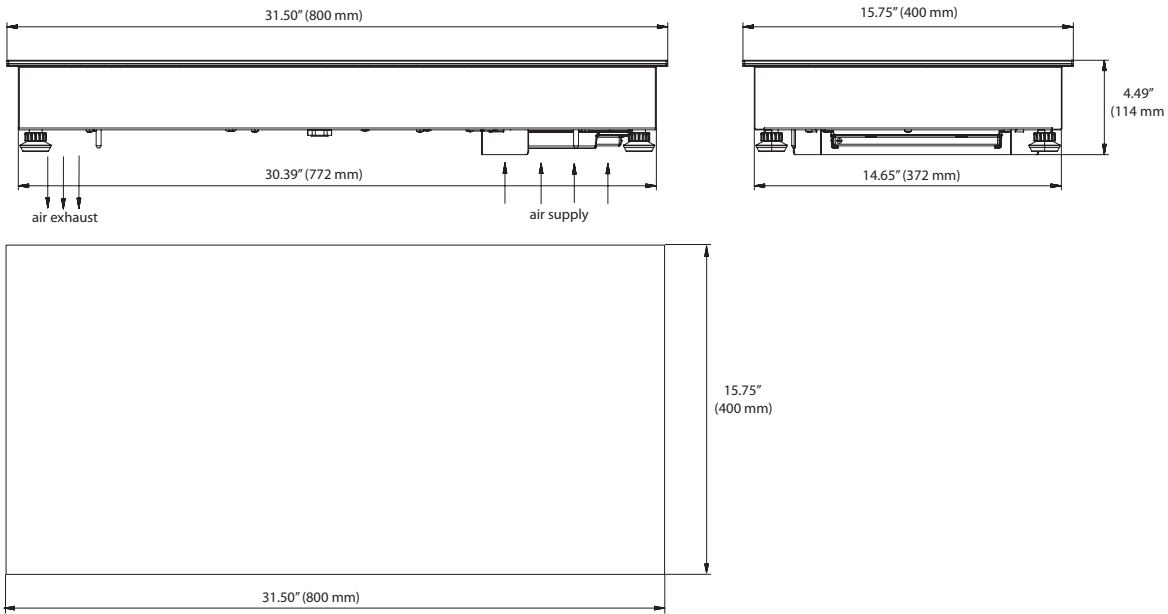

Number of heating zones: 2
Ceran™ glass surface: 31.5"x15.75"x0.16" (800x400x4 mm)
Housing: stainless steel

Model	GI-HO1500
Part Number	99620101
Dimension W x D x H	400 x 800 x 114 mm [15.75 x 31.5 x 4.5 inches]
Weight	18kg [39.7lb]
Electrical Specifications (EU/US)	1 Phase
Power, Watts	2 x 750W
Electrical supply V/Hz	120 V/50-60 Hz/1 12A
Plug	 NEMA 5-15P
Shipping Information	
Dimensions W x D x H	1200 x 800 x 380 mm [47.2 x 31.5 x 15 inches]
Weight	33kg [73.7lb]
Cu. Ft.	12.9

Note:
Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only.
Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6846A
08/25

