

Instinct Induction Countertop Dual Griddle

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- GIIC-DG7.0
- GIIC-DG10.0

powered by
INDUCS



GIIC-DG7.0

Standard Features

- Realtime Temperature Control System (RTCSmp)
- Temperature setting from 50 to 230°C (120 to 450°F)
- Special 2-zone induction non-stick griddle
- Timer function
- Superior energy-efficiency
- Convenient and reliable
- Short heat-up times
- Overheat protection
- Instantaneous control of the frying temperature with no lag
- Completely uniform heat distribution across the entire cooking surface
- Easy to clean
- LED display
- Includes plug and cord (1.8m/6ft.)
- Simple and intuitive "Tap and Turn" knob

Advanced Features

- RTCSmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter
- Incoming voltage detection
- Easy power reduction
- Quiet ventilation for less noise

Included

- Spatter guard
- Spatula
- Stainless steel pad

Specifications

Significantly reduced energy consumption thanks to high-efficiency induction technology with optimised energy transfer between the griddle and the food product.

Specially developed induction griddle with HPCR stainless steel surface protection.

Contactless multi-point RTCSmp technology for temperature measurement and temperature control accurate to one degree over the entire cooking time and the entire cooking surface for optimal frying results.

Convenient frying without creating ambient heat with direct heat transfer from the griddle to the food product by means of induction.

Especially high operational safety and reliability due to numerous protective features.

Brief heating time under 3-½ minutes.

Easy to clean with removable, washable and reusable air filter.

Exceptionally robust and developed for continuous operation in the restaurant industry.

Reduction of the maximum power from 100% to 25%.

Simple and intuitive operation using two independent control knobs on the front

Two entire separate temperature zones on the one unit.

Automatic shut-off feature prohibits overheating.

The unit fits the power that the operator has available.

Warranty: 2 years on parts & labor (US and Canada only).

North American models: ETL listed in compliance with, CSA C22.2 No.109, NSF-4 Complies with FCC part 18, ICES-001




Intertek



Intertek



Instinct Induction Countertop Dual Griddle

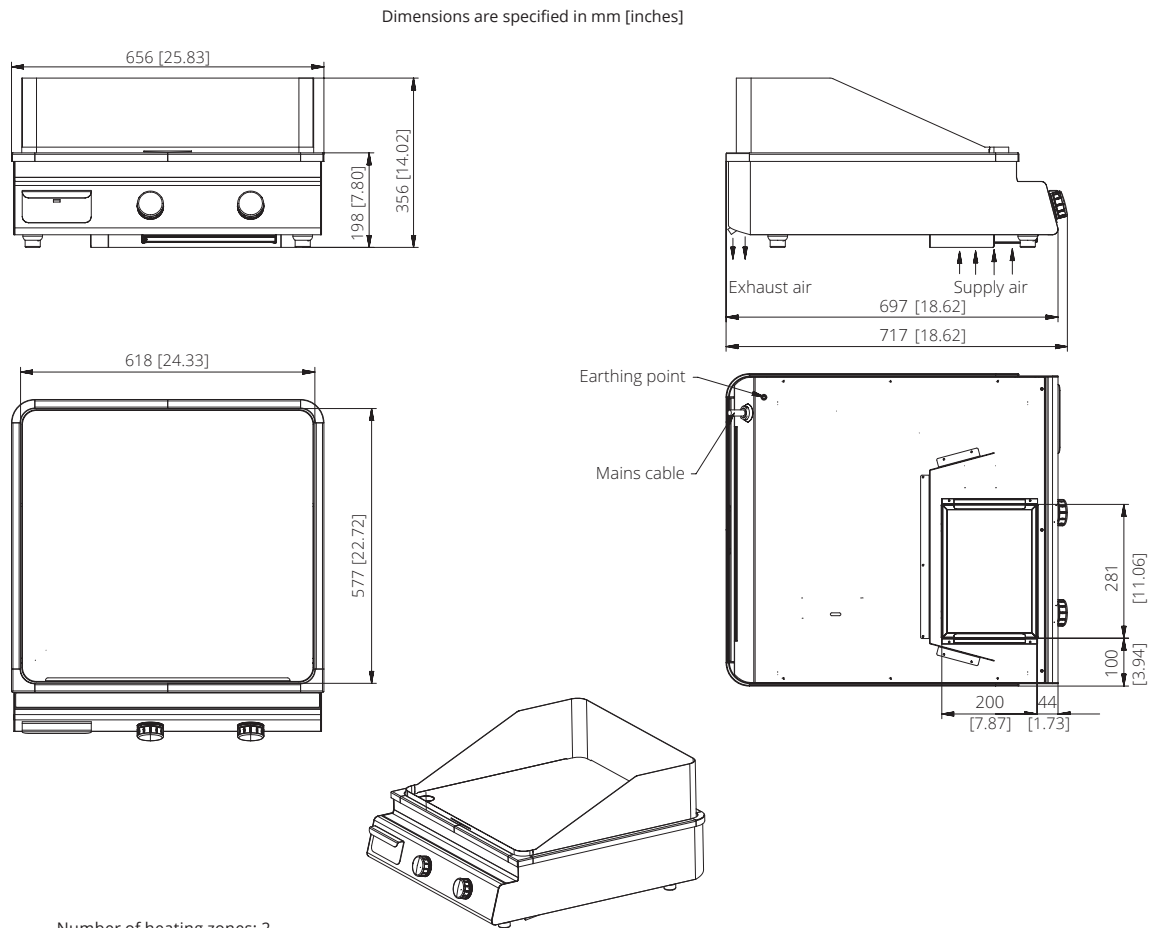

Number of heating zones: 2
Griddle surface: 618 x 577 mm [24.33 x 22.72 inches]
Temperature setting: 50 to 230°C / 120 to 450°F
Housing: stainless Steel

Model	GIIC-DG7.0	GIIC-DG10.0	
Part Number	99650039	99650040	99650041
Dimension W x D x H	656 x 717 x 198 mm [25.86 x 28.23 x 7.80 inches]	656 x 717 x 198 mm [25.86 x 28.23 x 7.80 inches]	
Weight	48 kg [106 lbs]	48 kg [106 lbs]	
Electrical Specifications (EU/US)	Single Phase	3 Phases	
Power, Watts	2 x 3500W	2 x 5000W	
Electrical supply V/Hz	208-240 V/50-60 Hz/3 20A	208-240 V/50-60 Hz/3 30A	380-440 V/50-60 Hz/3 16A
Plug	 NEMA 15-30P	 NEMA 15-50P	 EU 5-Pole
Shipping Information			
Dimensions W x D x H	1200 x 800 x 550 mm [47.25 x 31.50 x 21.65 inches]	1200 x 800 x 550 mm [47.25 x 31.50 x 21.65 inches]	
Weight	68 kg [150 lbs]	68 kg [150 lbs]	
Cu. Ft.	19	19	

Note:
Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only.
Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8147D
08/25

