

Master Series Front-Fired Hot Top Range Attachment

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- M5S
- M5T



Model M5S
Shown with Optional
Backguard

Standard Features

- Stainless steel front and sides
- Stainless steel door on storage base
- 6" (152mm) chromed steel adjustable legs
- 7-1/2" (191mm) stainless steel front rail
- Extra heavy-duty cast-iron top sections
- Removable cast-iron ring and lid
- Stainless steel burner box bottom
- Storage base interior of aluminized steel
- Heavy-gauge aluminized steel radiation baffle system
- Three individually controlled jet burners rated at 45,000 BTU (13.18 kW) total

Options & Accessories

- Stainless steel main back
- Stainless steel common front rail up to 68" (1728mm) wide (two or more units in a battery)
- End caps and cover (NC, Specify)
- Gas shut off valve; 3/4", 1" or 1-1/4" NPT
- Gas regulator 3/4" or 1-1/4"
- Rear gas connection, 3/4", 1" or 1-1/4", external left or right side-mount, stainless steel 5-1/4" (133mm) x 4-1/4" (108mm) enclosures gas line, adds 5-1/4" (133mm) to width
- Gas flex hose & quick disconnect (3/4", 1" or 1-1/4" NPT x 5") w/ restraining device, please specify
- Set of 4 swivel casters with front brakes,
- Set of 4 Polyurethane non-marking swivel casters w/front brakes
- 6" (152mm) stainless steel adjustable legs
- Modular stand, (T model)
- Dais base, (S model)
- Stainless steel tubular high shelf, single or double-deck
- Stainless steel backguard: 10" (354mm), 17" (432mm) or 33" (838mm) high
- 230 Volt, 50 cycle components with electronic ignition (for exports)

Specifications


Heavy-duty gas range attachment with storage base, Model M5S. One front-fired Spectro-Heat hot top. 17" (432mm) wide x 38" (965mm) deep, including 7-1/2" (191mm) deep stainless steel front rail. Stainless steel front and sides. 45,000 BTU (13.18 kW) total. Natural or propane gas available. Also available with modular top, suffix T.

NOTE: Attachments supplied with casters must be installed with an approved restraining device.

NOTE: All Master Series ranges, attachments, fryers, and broilers require a high shelf or backguard flue attachment - sold separately.



Master Series Front-Fired Hot Top Range Attachment

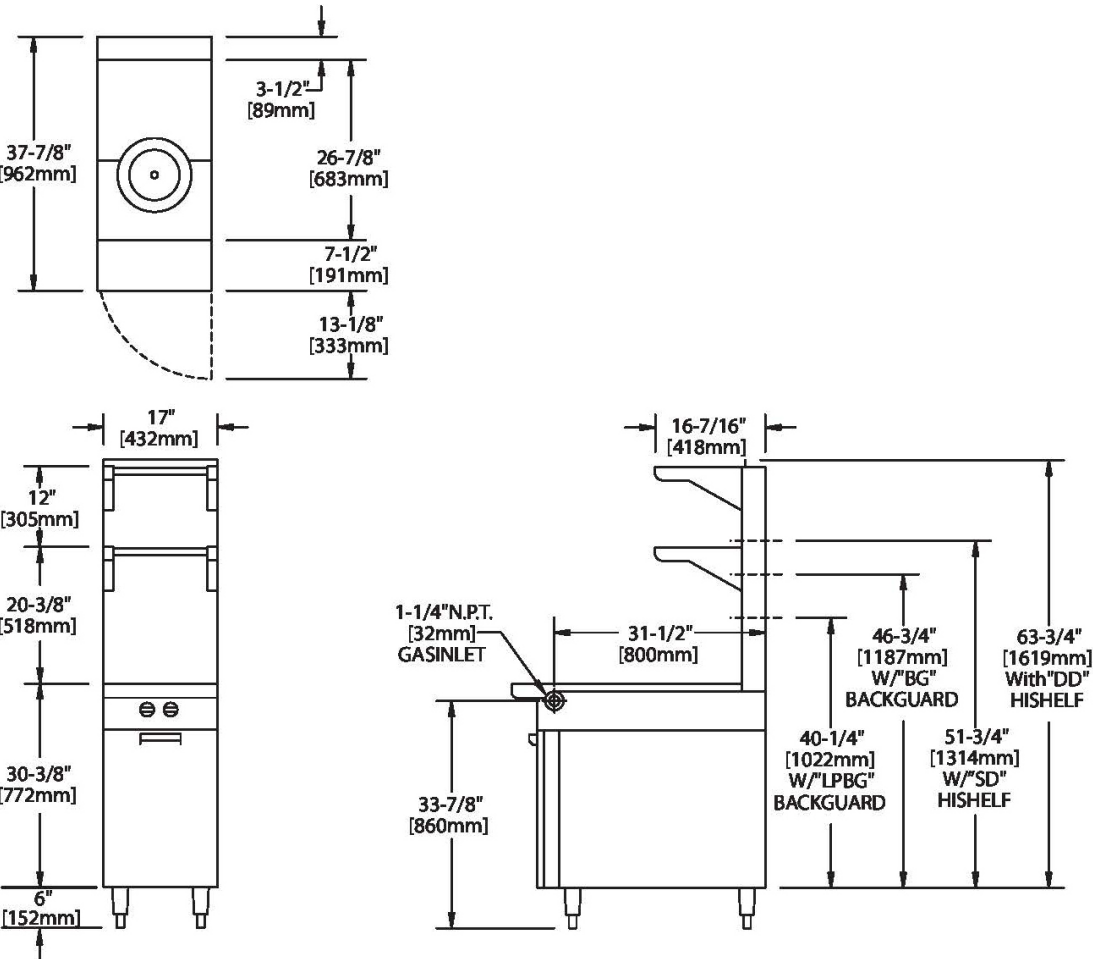

Product	Width: In(mm)	Depth: In(mm)	Height: In(mm) (w/ NSF Legs)	Height: In(mm) (w/o NSF Legs)	Oven/Storage Base Interior: in(mm)		
					Width	Depth	Height
M5S	17(432)	38(965)	36-3/8(924)	30-3/8(772)	14(356)	32-1/2(826)	20-1/2(519)
M5T	17(432)	38(965)	36-3/8(924) w/stand	9-1/2(241) w/o stand*	N/A	N/A	N/A

*Modular top has 1-1/2" seating flanges.

INPUT-BTU/hr	M5S	M5T
Natural Gas	45,000 BTU (13.18 kW)	45,000 BTU (13.18 kW)
Propane Gas	33,000 BTU (9.66 kW)	33,000 BTU (9.66 kW)

S=Range w/Storage Base T=Modular Top

INSTALLATION NOTES			Shipping (Lb/Kg) - Cu Ft
Combustible Wall Clearances ¹	Entry Clearances	Operating Pressure	M5S 200/91 - 26 M5T 120/55 - 9
Sides: 14" (356mm) Back: 6" (152mm)	Crated: 22 1/4" (565mm) Uncrated: 17-1/4" (438mm)	Natural: 6" WC (15mbar) Propane: 10" WC (25mbar)	

¹NOTE: Installation clearance reductions are applicable only where local codes permit.

Data applies only to North America

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level. Specify altitudes over 2,000 ft.

Please specify gas type when ordering.

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8206A
11/25

