

Master Series Infra-Red Salamander Broiler

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Master Series Infra-Red Salamander Broiler

Models

- MIR-34L
- MIR-34C



Model MIR-34L
Range-Mount

Standard Features

- Range-Mount Model MIR-34L – stainless steel front, sides, top, backsplash and bottom w/heat shield
- Counter-Mount Model MIR-34C – stainless steel front and sides – C/W 4" (102mm) legs
- 1/2" NPT top gas inlet
- Two 20,000 BTU (5.86 kW) atmospheric infra-red burners.
- Two individual Hi-Lo valve controls
- Three-position spring-balanced rack assembly raising/lowering mechanism
- Large capacity removable grease pan
- Gas regulator

Options & Accessories


- Stainless steel main bottom. – MIR-34C
Stainless steel bottom for counter models placed on counters not required if ordering wall mounting bracket option.
- Brackets for wall mounting , and stainless steel bottom w/heat shield
- Interconnecting gas piping for range-mount

Specifications



Gas infra-red salamander broiler, range-mount model MIR-34L and counter-mount model MIR-34C. Two (2) 20,000 BTU (5.86 kW) atmospheric infra-red burners. Three-position adjustable rack. Stainless steel front, sides, backsplash (range-mount) and bottom w/heat shield. 40,000 BTU (11.72 kW) total. Natural or propane gas.



Master Series Infra-Red Salamander Broiler

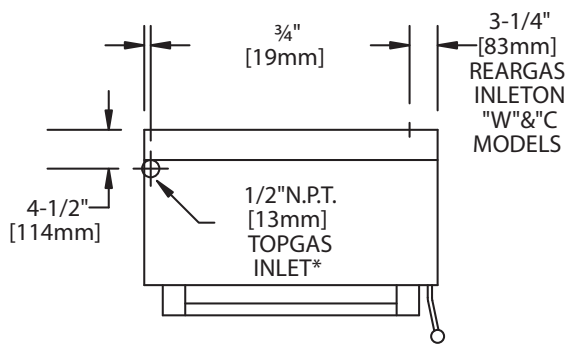

*Note: TOP GAS INLET pipe extension adds 4" (258mm) to overall height.

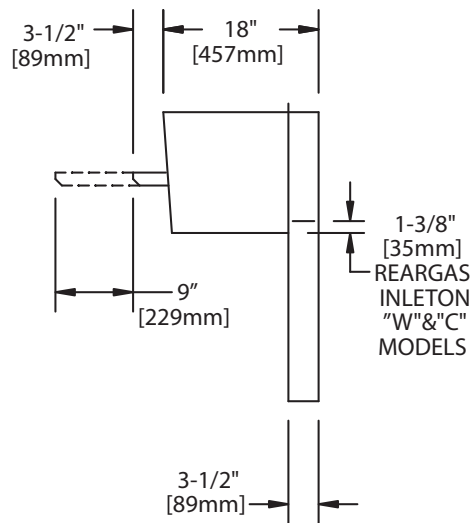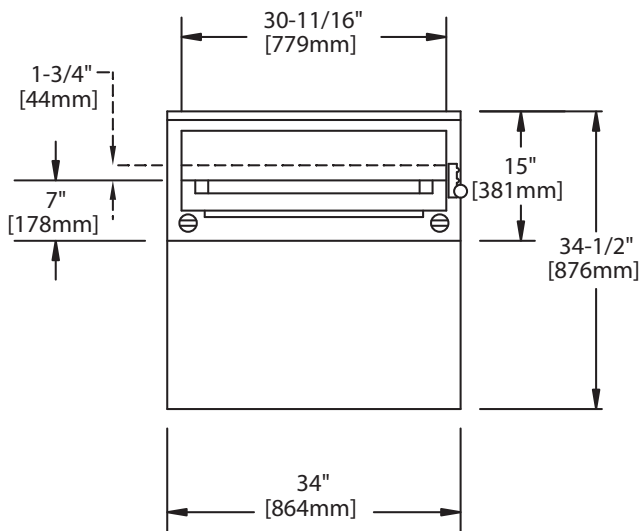

INSTALLATION NOTES		
Combustible Wall Clearances ¹	Entry Clearances	Manifold Operating Pressure
Sides: 6" (152mm) Back: 6" (152mm)	Crated: 39 3/4" (997mm) Uncrated: 34-3/4" (870)	Natural: 6" WC (15mbar) Propane: 10" WC (25mbar)

¹NOTE: Installation clearance reductions are applicable only where local codes permit.

PRODUCT	MIR-34L
Width: In(mm)	34(864)
Depth: In(mm)	18(457)
Height: In(mm)	34-1/2(876)
INPUT:BTU/hr(kW)(Natural Gas)	40,000(11.7)
Shipping Wt:(Lb/Kg)	200/99
Cu Ft	22

Data applies only to North America

Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's standard NFPA96. (for North American only)

Gas input ratings shown here are for installations up to 2,000 ft. (610m) above sea level.

Specify altitudes over 2,000 ft.

Please specify gas type when ordering.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6892B
07/25

