

SS680 Sentry Series Electric Salamander Broiler

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- SERC
- SER-686
- SER-684



Model SERC

Standard Features

- Stainless steel exterior
- Six metal sheath elements, 3 over each half of broiler rack, 1.16 kW each, (3.5 kW per side, 7.0 kW total)
- Elements are controlled by two 3-heat switch controls, one for each half of the broiler rack
- Fixed-position broiling rack with flat or easy view tilt position, roll-in/roll-out rack
- Large capacity removable grease pan
- Heat resistant, cool touch handle with easy-grip shape
- 4" (102mm) sanitary legs for model SERC
- One year limited warranty on parts & labor (USA & Canada only)

Options & Accessories

- Stainless steel wall-mount brackets for model SERC, please specify when ordering
- Stainless steel main back

Specifications

Electric salamander broiler with dual controlled Solar Ray heating elements.

All Stainless steel construction, 34" (864mm) wide with fixed-position broiling rack.


Counter-mounted (Model SERC), or range-mounted, (models SER-686, and SER-684 for mounting on range models SS686 and SS684, respectively).

Wall-mount option available.





SS680 Sentry Series Electric Salamander Broiler

SS680 Sentry Series Electric Salamander Broiler

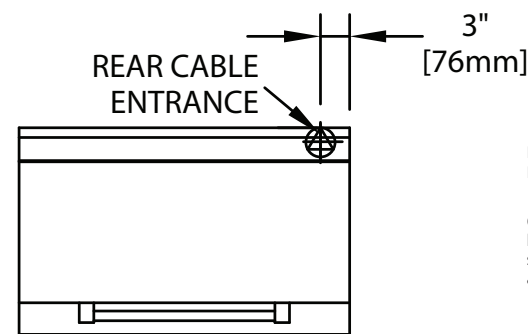

NOTE: Many local codes exist, and it is the responsibility of the Owner and the Installer to comply with those codes.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

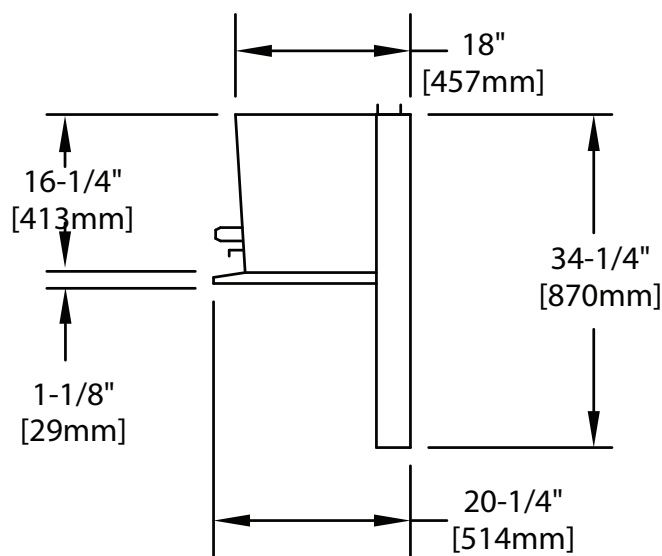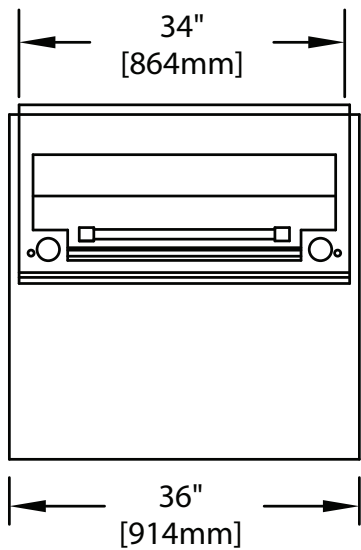

Model	Total Kw Load	208V/1Ph	Total Amps				
			208V/3 Ph	240V/1Ph	240V/3 Ph	400 V/3N	415V/3N
SERC, SER-680 wired independently*	7	34	29	29	25	15	15

Model	Shipping	
	Cu Ft	Lbs/Kg
SERC	11	210/95
SER-686	25	176/80
SER-684	35	209/95

Installation Notes:
Clearances from combustible surfaces should be minimum 7" (178mm) from sides, 2" (51mm) from back

*Note: 3-phase ratings apply to SERC and SER-680 ordered separately. When a range and salamander are ordered together it is standard for the salamander to be prewired at the factory to interconnect with the range (single phase).

Total kW loading is 7.0 kW. For further information on ratings and connection options consult the factory.

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8180A
06/26

