

Halifax HRHO848 Package  
Type 2 Heat and Fume  
Removal Hood System - 8' x  
48"

Item #421HRHP848

Technical Data

|                  |                                 |
|------------------|---------------------------------|
| Length           | 8 Feet                          |
| Depth            | 48 Inches                       |
| Ceiling Height   | 10' or Over                     |
| Amps             | 6 Amps                          |
| Phase            | 1 Phase                         |
| Voltage          | 115 Volts                       |
| Wattage          | 690 Watts                       |
| Features         | Made in America<br>UL Certified |
| Fire Suppression | Without Fire Suppression        |



Features

- Type 2 hood for heat and fume removal only; exhaust-only system
- Includes box-style hood canopy and exhaust fan
- 18-gauge 430 stainless steel construction on all exposed surfaces
- For ceilings 10' or higher
- 115V direct-drive downblast exhaust fan (1600 CFM)

Certifications



Made in America



Hardwired




UL Certified

## Technical Data

|            |                           |
|------------|---------------------------|
| Horsepower | 1/2 hp                    |
| Plug Type  | Hardwire                  |
| Style      | Heat Removal Hood Systems |
| Type       | Type 2                    |

## Plan View

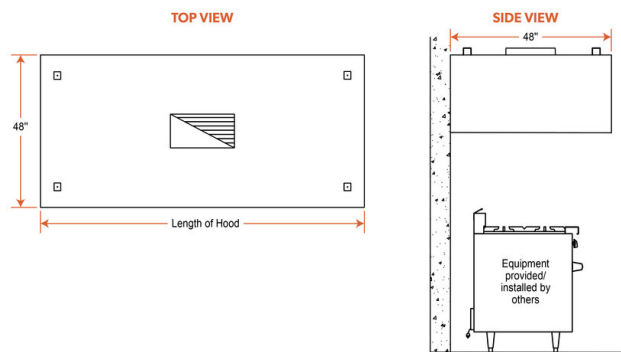

## Notes & Details

Keep your kitchen free of heat and fumes with this Halifax HRHO848 package 8' x 48" type 2 heat and fume removal hood system. This unit is suitable for use over any equipment that has a surface operating temperature under 600 degrees Fahrenheit, and that is required by fire code to have a type 2 hood - this includes equipment such as ovens and small kitchen appliances. It is not designed for use over grease-producing equipment. The hood removes heat and any odors produced by your equipment to make your kitchen a much more comfortable place for employees to work! It is an exhaust-only system and also contains a 115V direct-drive downblast exhaust fan designed for 1600 CFM, with your choice of a flat roof or pitched roof curb mount. A variable dial control makes it easy to adjust the fan speed as needed to account for higher or lower ventilation needs.

The hood uses (1) 14" x 14" wire mesh filter. 18-gauge 430 stainless steel is used on all exposed surfaces to give it excellent durability and cleanability, while the MIG-welded frame provides seamless, liquid-tight joints. The hood features a box-style canopy design to provide superior performance.

This hood should be used in applications where the ceiling is 10' or taller. It must be hardwired. Cords and plugs are not included.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).