

KG-12-FS

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 400+ lbs / hour processing capacity
(1st grinding – 3/8" plate)
- 200+ lbs / hour processing capacity
(2nd grinding – 1/8" plate)
- Compact footprint for limited spaces
- 3/4 HP motor with powerful 21 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Durable food grade stainless steel feed tray and body
- Non slip rubber feet
- Effortless to install and operate



PRODUCT HIGHLIGHTS



Robust stainless steel body and tray



Gear driven body



Included Accessories



Non skid-feet



Compact footprint



1 year parts and labor

KG-12-FS

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

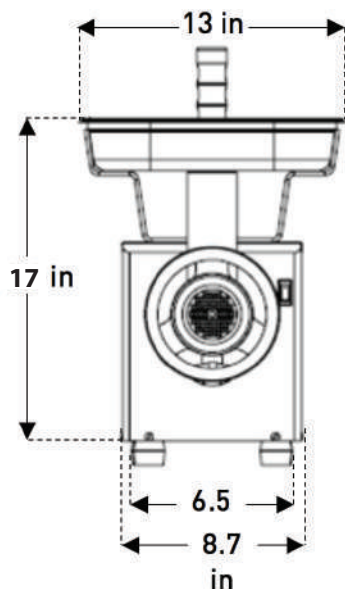

Side view

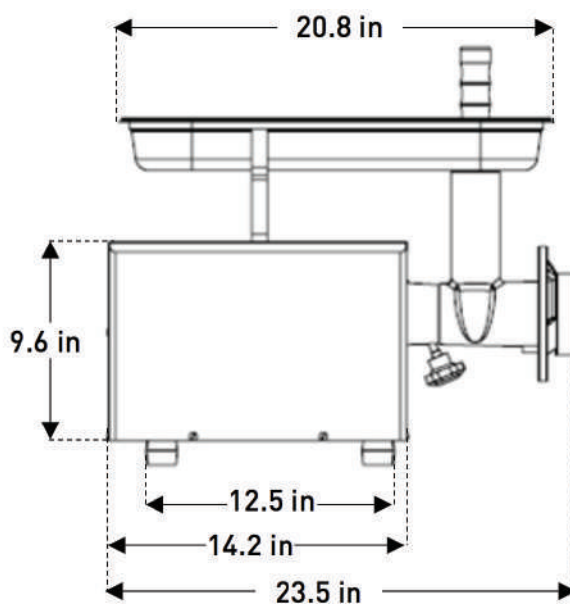

NEMA 5-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 23.5" W: 13" H: 17"
Net ewigth	79.37 lb (36 kg)
Power cord length	5.9 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Cast Iron

Logistic data

Max number of SKU per pallet	6
Shipping dimensions per unit	L: 28" W: 14.5" H: 17.5"
Shipping weight per unit	85 lbs
Shipping dimensions full pallet	L: 30" W: 31" H: 40"
Shipping weight full pallet	529 lbs
Freight class	85

Electrical data

Motor	3/4 HP
Volts / Frequency	115 Vac / 60 Hz
Amps	11.5
Watts	550
Phase	1
Type of plug (NEMA)	5-15P

Performance / Capacity

1st ginding capacity (3/8" plate)	7.49 lbs / min
2nd ginding capacity (1/8" plate)	3.97 lbs / min

Accessories

Knives	Plates
NI-12 (Stainless Steel Round)	CI-12-1/4"
NIR-12 (Stainless Steel Rectangular)	CI-12-1/8"
NLV-12 (Long Lasting Steel)	CI-12-3/8"
	CI-12-3/16"

L: Length W: Width H: Height

KG-12-SS

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- Food grade stainless steel headstock, plate knife and auger
- Compact footprint for limited spaces with large 20.8" x 13" feed tray
- 400+ lbs /hour processing capacity (1st grinding – 3/8" plate)
- 200+ lbs /hour processing capacity (2nd grinding – 1/8" plate)
- 3/4 HP motor with powerful 25 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Non slip rubber feet
- Effortless to install and operate



PRODUCT HIGHLIGHTS



Stainless steel headstock



Gear driven body



Included Accessories



Stainless steel body and tray



Compact footprint with large tray



Non skid-feet



1 year parts and labor

KG-12-SS

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

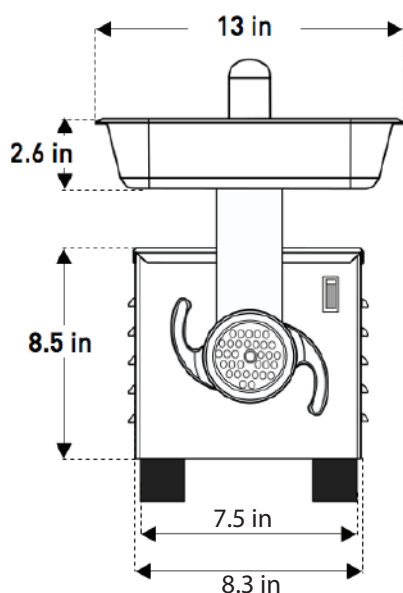

Side view

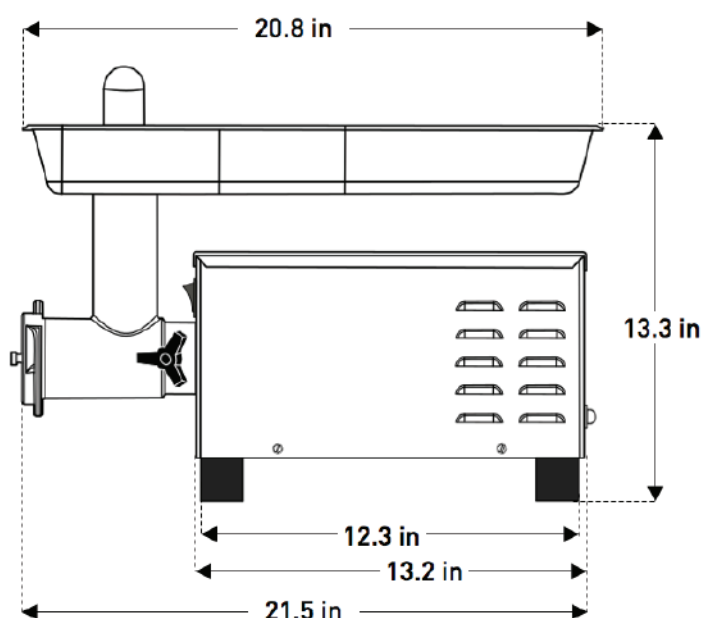

NEMA 5-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 21.5" W: 13" H: 13.3"
Net weight	48.50 lb (22 kg)
Power cord length	5.9 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Stainless steel

Logistic data

Max number of SKU per pallet	12
Shipping dimensions per unit	L: 22" W: 23.5" H: 15.5"
Shipping weight per unit	48 lbs
Shipping dimensions full pallet	L: 49" W: 51" H: 56"
Shipping weight full pallet	582 lbs
Freight class	85

Electrical data

Motor	3/4 HP
Volts / Frequency	115 Vac / 60 Hz
Amps	11.5
Watts	550
Phase	1
Type of plug (NEMA)	5-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	7.4 lbs / min
2nd grinding capacity (1/8" plate)	5.7 lbs / min

Accessories

Knives	Plates
NI-12 (Stainless Steel Round)	CI-12-1/4"
NIR-12 (Stainless Steel Rectangular)	CI-12-1/8"
NLV-12 (Long Lasting Steel)	CI-12-3/8"
	CI-12-3/16"

L: Length W: Width H: Height

KG-22-W

MEAT GRINDER

PRO-CUT®

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 1,700+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 800+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 1 HP motor with powerful 28 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Food grade stainless steel body and large feed tray
- Robust headstock with permanent affixed safety guard
- Non slip rubber feet



PRODUCT HIGHLIGHTS




Affixed safety guard



Stainless steel body and tray



Included accessories



High grinding capacity



Non skid-feet



**30.2" x 16.1 x 3.3"
Feed tray**



1 year parts and labor

KG-22-W

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

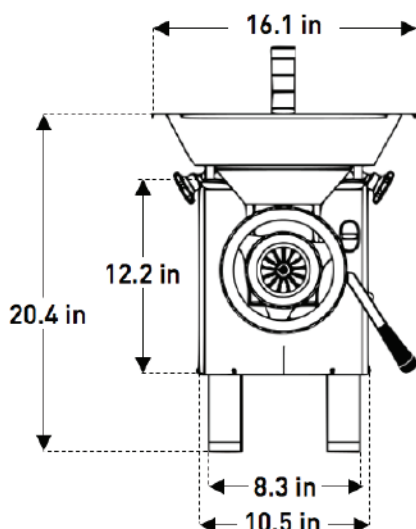

Side view

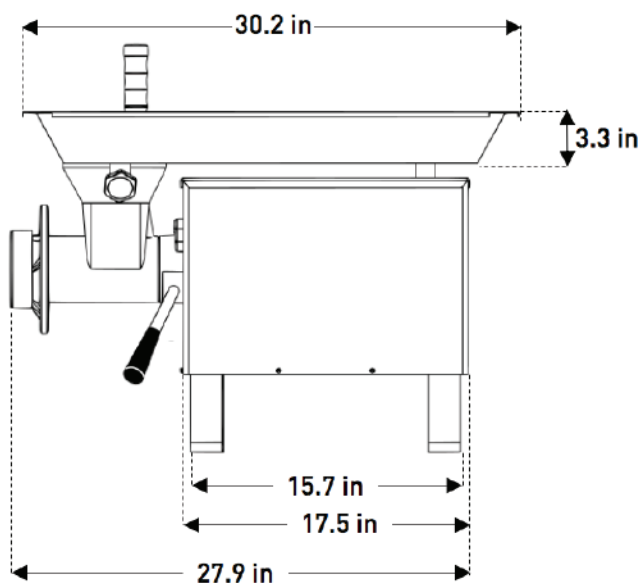

NEMA 5-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 30.2" W: 16.1" H: 20.4"
Net weight	133.38 lb (60.50 kg)
Power cord length	5.9 ft

Construction

Cabinet & Tray	Stainless steel
Headstock	Cast iron

Logistic data

Max number of SKU per pallet	4
Shipping dimensions per unit	L: 32" W: 16.5" H: 27.5"
Shipping weight per unit	166 lbs
Shipping dimensions full pallet	L: 37" W: 36" H: 59"
Shipping weight full pallet	705 lbs
Freight class	85

Electrical data

Motor	1 HP
Volts / Frequency	110 Vac / 60 Hz
Amps	15
Watts	750
Phase	1 PH
Type of plug (NEMA)	5-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	29 lbs / min
2nd grinding capacity (1/8" plate)	14 lbs / min

Accessories

Knives	Plates
NIR-22 (Stainless Steel Rectangular)	CI-22-3/16"
NLV-22 (Long Lasting Steel)	CI-22-1/8"
	CI-22-3/8"
	CI-22-1/4"

L: Length W: Width H: Height

KG-22W-SS

MEAT GRINDER

PRO-CUT®

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- Features a stainless steel headstock, knife, plate and auger
- 1,700+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 800+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 1 HP motor with powerful 28 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Food grade stainless steel body and large feed tray
- Robust headstock with permanent affixed safety guard
- Non slip rubber feet



PRODUCT HIGHLIGHTS



**Stainless steel
body and tray**



**Stainless steel
headstock**



**Included
accessories**



**Affixed safety
guard**



**Motor
protector**



**30.2"x16.1"x3.3"
Feed tray**



1 year parts and labor

KG-22W-SS

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

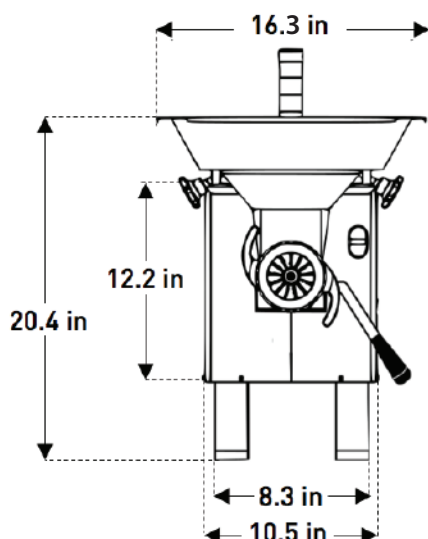

Side view

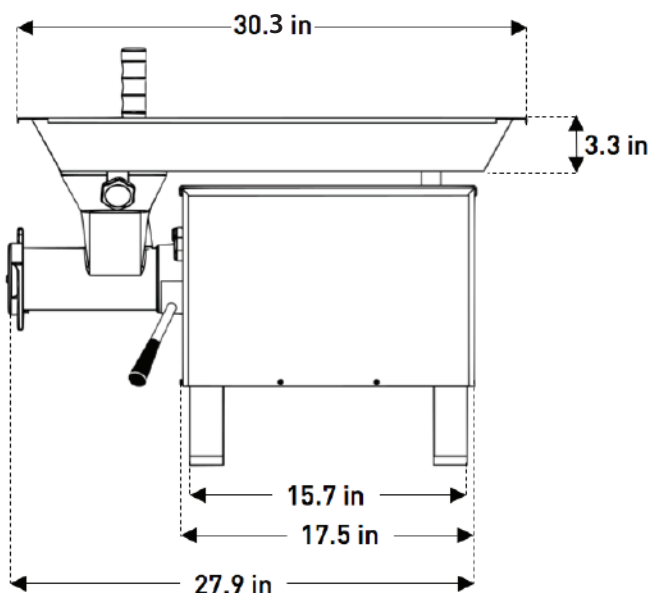

NEMA 5-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 30.3" W: 16.3" H: 20.4"
Net weight	130.07 lb (73 kg)
Power cord length	5.9 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Stainless steel

Logistic data

Max number of SKU per pallet	4
Shipping dimensions per unit	L: 33" W: 17" H: 28"
Shipping weight per unit	149 lbs
Shipping dimensions full pallet	L: 36" W: 36" H: 59"
Shipping weight full pallet	638 lbs
Freight class	85

Electrical data

Motor	1 HP
Volts / Frequency	110 Vac / 60 Hz
Amps	15
Watts	740
Phase	1
Type of plug (NEMA)	5-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	29 lbs / min
2nd grinding capacity (1/8" plate)	14 lbs / min

Accessories

Knives	Plates
NIR-22 (Stainless Steel Rectangular)	CI-22-3/16"
NLV-22 (Long Lasting Steel)	CI-22-1/8"
	CI-22-3/8"
	CI-22-1/4"

L: Length W: Width H: Height

KG-22W-XP-SS

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- Features a stainless steel headstock, knife, plate and auger
- 1,800+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 900+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 2 HP motor with powerful 56 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Food grade stainless steel body and large feed tray
- Robust headstock with permanent affixed safety guard
- Non slip rubber feet
- Includes motor protector



PRODUCT HIGHLIGHTS



**Stainless steel
body and tray**




**Stainless steel
headstock**



**Included
accessories**



**Affixed safety
guard**



**Motor
protector**



**30.2"x16.1"x3.3"
Feed tray**



1 year parts and labor

KG-22W-XP-SS

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

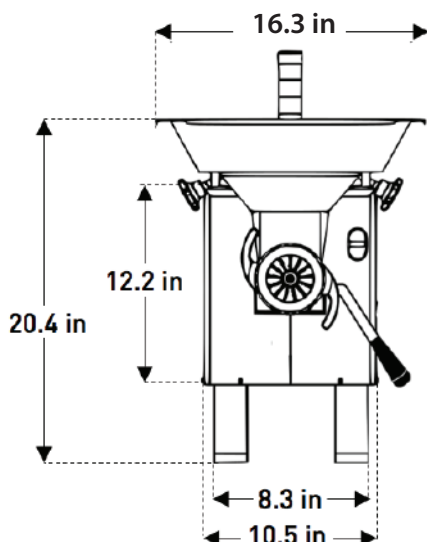

Side view

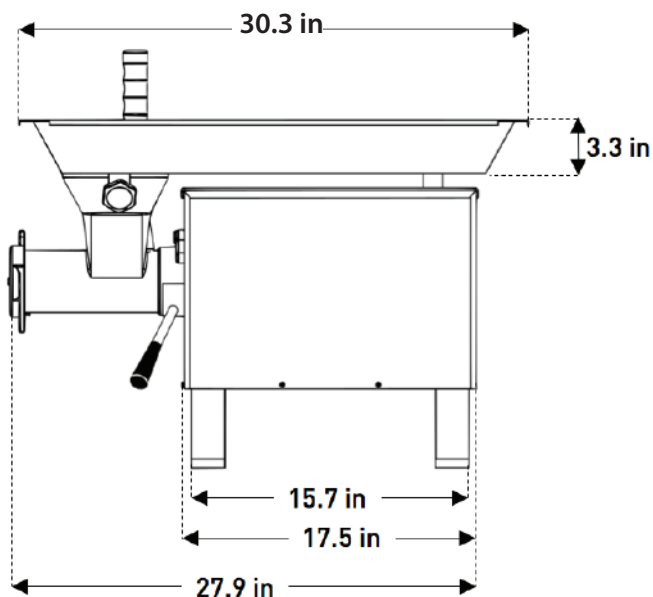

TECHNICAL DATA



Dimensions

External dimensions	L: 30.3" W: 16.3" H: 20.4"
Net weight	131.17 lb (59.50 kg)
Power cord length	5.9 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Stainless steel

Logistic data

Max number of SKU per pallet	4
Shipping dimensions per unit	L: 32" W: 17" H: 28"
Shipping weight per unit	160 lbs
Shipping dimensions full pallet	L: 36" W: 36" H: 59"
Shipping weight full pallet	681 lbs

Electrical data

Motor	2 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	8.9
Watts	1500
Phase	1 PH
Type of plug (NEMA)	5-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	29.8 lbs / min
2nd grinding capacity (1/8" plate)	15.4 lbs / min

Accessories

Knives	Plates
NIR-22 (Stainless Steel Rectangular)	CI-22-3/16"
NLV-22 (Long Lasting Steel)	CI-22-1/8"
	CI-22-3/8"
	CI-22-1/4"

*L: Length W: Width H: Height

KG-22-W-XP

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 1,800+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 900+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 2 HP motor with powerful 56 lbs-ft torque for meat grinding
- Precision engineered steel gear transmission
- Food grade stainless steel body and feed tray
- Robust headstock with permanent affixed safety guard
- Non slip rubber feet
- Includes motor protector



PRODUCT HIGHLIGHTS




Affixed safety guard



Stainless steel body and tray



Included accessories



High grinding capacity



Motor protector



**30.2"x16.1"x3.3"
Feed tray**



1 year parts and labor

KG-22-W-XP

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

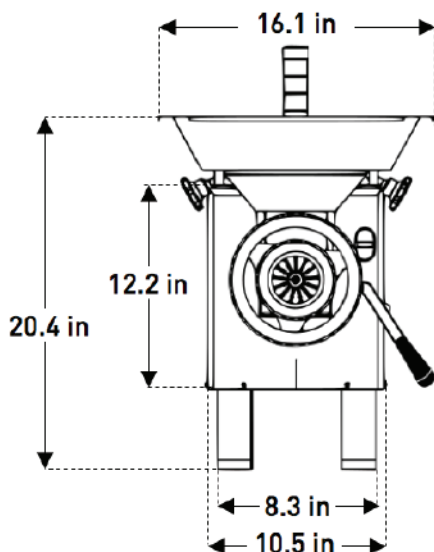

Side view

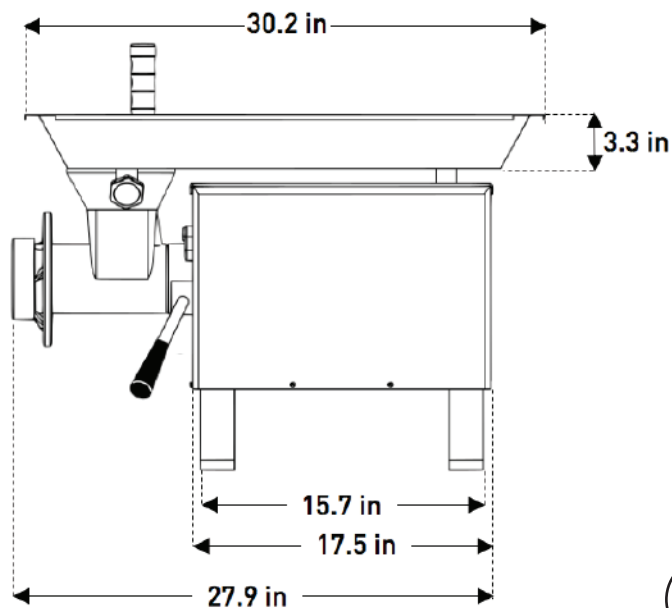

NEMA 5-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 30.2" W: 16.1" H: 20.4"
Net weight	137.79 lb (62.50 kg)
Power cord length	5.9 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Cast iron

Logistic data

Max number of SKU per pallet	4
Shipping dimensions per unit	L: 32" W: 16.5" H: 27"
Shipping weight per unit	171 lbs
Shipping dimensions full pallet	L: 36" W: 36" H: 59"
Shipping weight full pallet	714 lbs
Freight class	85

Electrical data

Motor	2 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	8.9
Watts	1500
Phase	1 PH
Type of plug (NEMA)	5-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	30 lbs / min
2nd grinding capacity (1/8" plate)	16 lbs / min

Accessories

Knives	Plates
NIR-22 (Stainless Steel Rectangular)	CI-22-3/16"
NLV-22 (Long Lasting Steel)	CI-22-1/8"
	CI-22-3/8"
	CI-22-1/4"

L: Length W: Width H: Height

KG-32

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 3,300+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 1,700+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 3 HP motor with powerful 85 lbs-ft torque for meat grinding
- 3 phase electrical connection
- Precision engineered steel gear transmission
- Food grade stainless steel body and feed tray
- Robust headstock with permanent affixed safety guard
- Safety deflector included
- Non slip rubber feet
- Includes motor protector in case of overload



PRODUCT HIGHLIGHTS



Safety deflector



**Powerful
3 HP motor**



**Included
accessories**



**Large stainless
steel feed tray**



**Stainless steel
body**



Motor protector



Intertek



Intertek



1 year parts and labor

KG-32

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

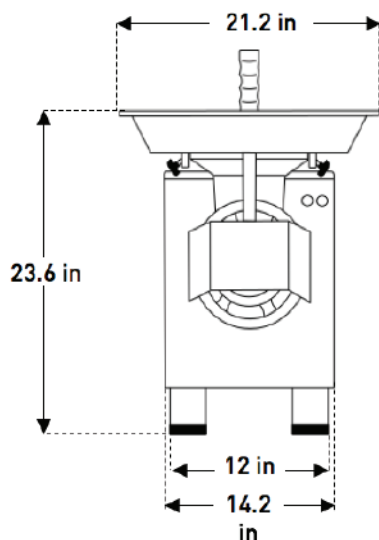

Side view

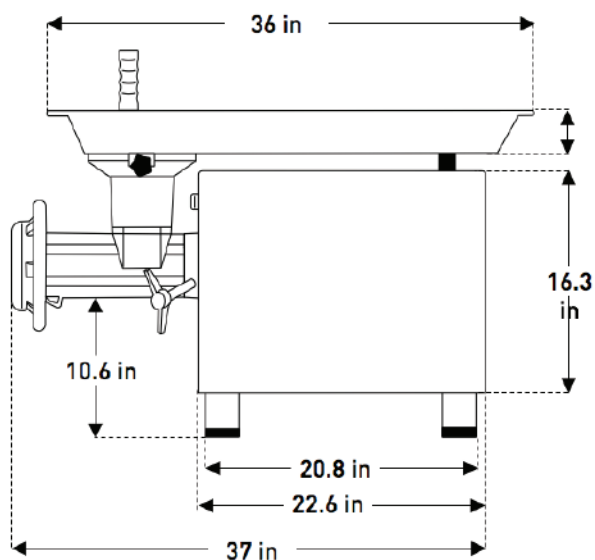

TECHNICAL DATA



L15-20P

Dimensions

External dimensions	L: 37" W: 21.2" H: 23.6"
Net weight	254.63 lb (115.50 kg)
Power cord length	6.56 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Cast iron

Logistic data

Max number of SKU per pallet	1
Shipping dimensions per unit	L: 44" W: 22" H: 32"
Shipping weight per unit	288 lbs
Shipping dimensions full pallet	L: 44" W: 22" H: 32"
Shipping weight full pallet	288 lbs
Freight class	85

Electrical data

Motor	3 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	16.7
Watts	2250
Phase	3
Type of plug (NEMA)	L15-20P

Performance / Capacity

1st grinding capacity (3/8" plate)	55 lbs / min
2nd grinding capacity (1/8" plate)	29 lbs / min

Accessories

Knives	Plates
NIR-32 (Stainless Steel Rectangular)	CD-32-1/8"
NLV-32 (Long Lasting Steel)	CD-32-1/8-29"
	CD-32-1/4"
	CD-32-3/16"
	CDH-32-3/16"
	CD-32-3/8"

L: Length W: Width H: Height

KG-32-MP MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 3,300+ lbs /hour processing capacity
(1st grinding – 3/8" plate)
- 1,700+ lbs /hour processing capacity
(2nd grinding – 1/8" plate)
- 3 HP motor with powerful 85 lbs-ft torque for meat grinding
- 1 phase electrical connection
- Precision engineered steel gear transmission
- Food grade stainless steel body and feed tray
- Robust headstock with permanent affixed safety guard
- Safety deflector included
- Non slip rubber feet
- Includes motor protector in case of overload



PRODUCT HIGHLIGHTS



Safety deflector



Powerful
1 HP motor



Included
accessories



Large stainless
steel feed tray



Stainless steel
body



Motor protector



1 year parts and labor

KG-32-MP

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

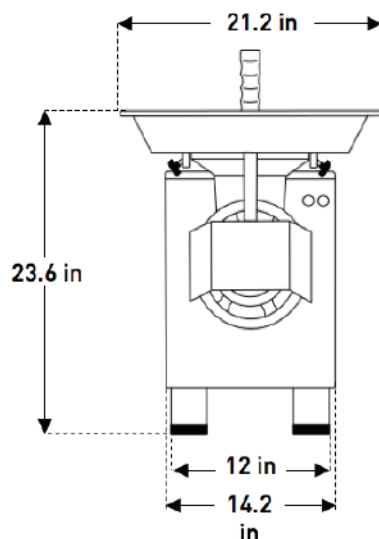

Side view

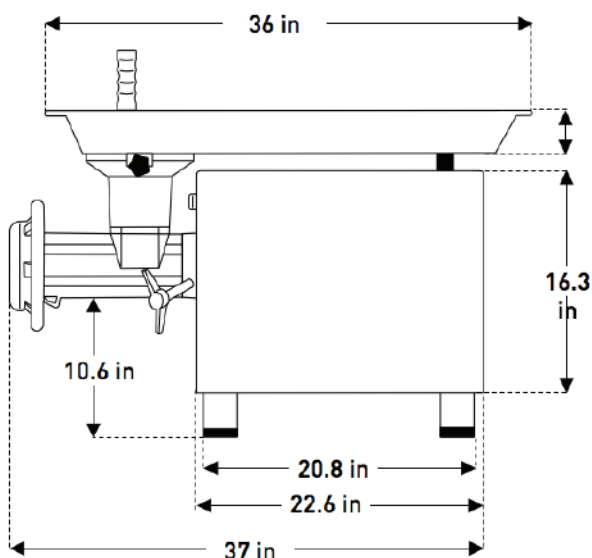

L6-15P

TECHNICAL DATA

Dimensions

External dimensions	L: 37" W: 21.2" H: 23.6"
Net weight	261.24 lb (118.50 kg)
Power cord length	6.56 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Cast iron

Logistic data

Max number of SKU per pallet	1
Shipping dimensions per unit	L: 44" W: 22" H: 32"
Shipping weight per unit	302 lbs
Shipping dimensions full pallet	L: 44" W: 22" H: 32"
Shipping weight full pallet	302 lbs
Freight class	85

Electrical data

Motor	3 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	16.7
Watts	2250
Phase	1
Type of plug (NEMA)	L6-15P

Performance / Capacity

1st grinding capacity (3/8" plate)	55 lbs / min
2nd grinding capacity (1/8" plate)	29 lbs / min

Accessories

Knives	Plates
NIR-32 (Stainless Steel Rectangular)	CD-32-1/8"
NLV-32 (Long Lasting Steel)	CD-32-1/8-29"
	CD-32-1/4"
	CD-32-3/16"
	CDH-32-3/16"
	CD-32-3/8"

L: Length W: Width H: Height

KG-32-XP

MEAT GRINDER

PRO-CUT[®]

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- 3,800+ lbs./hour processing capacity
(1st grinding – 3/8" plate)
- 1,800+ lbs./hour processing capacity
(2nd grinding – 1/8" plate)
- 5 HP motor with powerful 141 lbs-ft torque for meat grinding
- 3 phase electrical connection
- Precision engineered steel gear transmission
- Food grade stainless steel body and feed tray
- Robust headstock with permanent affixed safety guard
- Safety deflector included
- Features a stainless steel stand
- Includes motor protector in case of overload



PRODUCT HIGHLIGHTS



Safety deflector



Powerful
5 HP motor



Stainless
steel stand



Large stainless
steel feed tray



Stainless steel
body



Motor protector



Intertek



Intertek



1 year parts and labor

KG-32-XP

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

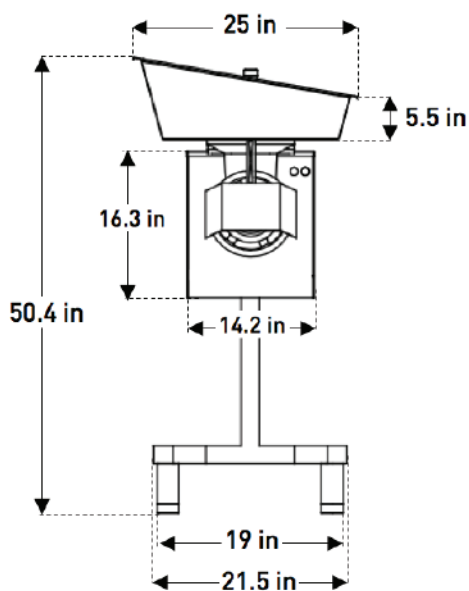

Side view

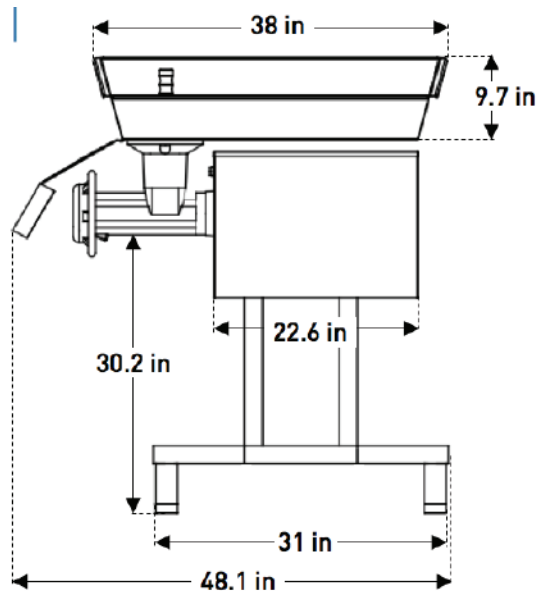

L15-20P

TECHNICAL DATA

Dimensions

External dimensions	L: 48.1" W: 25" H: 50.4"
Net weight	272.27 lb (123.50 kg)
Power cord length	6.56 ft

Construction

Cabinet material	Stainless steel
Tray material	Stainless steel
Headstock	Cast iron
Stand	Stainless steel

Logistic data

Max number of SKU per pallet	1
Shipping dimensions per unit	L: 49" W: 26" H: 51"
Shipping weight per unit	337 lbs
Shipping dimensions full pallet	L: 49" W: 26" H: 51"
Shipping weight full pallet	337 lbs
Freight class	85

Electrical data

Motor	5 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	13.6
Watts	3750
Phase	3 PH
Type of plug (NEMA)	L15-20P

Performance / Capacity

1st grinding capacity (3/8" plate)	64 lbs / min
2nd grinding capacity (1/8" plate)	31 lbs / min

Accessories

Knives	Plates
NIR-32 (Stainless Steel Rectangular)	CD-32-1/8"
NLV-32 (Long Lasting Steel)	CD-32-1/8-29"
	CD-32-1/4"
	CD-32-3/16"
	CDH-32-3/16"
	CD-32-3/8"

L: Length W: Width H: Height

KMG-32

MEAT GRINDER

PRO-CUT®

SPEC SHEET

www.pro-cut.us

STANDARD FEATURES

- Robust food grade stainless steel construction
- 3,900+ lbs./hour processing capacity
(1st grinding – 3/8" plate)
- 3,000+ lbs./hour processing capacity
(2nd grinding – 3/16" plate)
- 7.5 HP motor with powerful 212 lbs-ft torque
for meat mixing and 1,094 lbs-ft torque
- Features a pneumatic piston for safety operation
- 3 phase electrical connection
- Precision engineered steel gear transmission
- 110 lbs hopper capacity
- Safety magnetic interlock sensor on lid
- Includes 4 caster wheels
- No tools needed to remove blades, plates and
grinding unit
- Includes motor protector in case of overload
- Hose down washable
- Pedal operated



PRODUCT HIGHLIGHTS



**Safety
pneumatic piston**



**Powerful 7.5 HP
motor**



**Stainless steel
construction**



**110 lbs Hopper
capacity**



**Included
accessories**



Motor protector



1 year parts and labor

KMG-32

MEAT GRINDER


PRO-CUT®

SPEC SHEET


www.pro-cut.us

PLAN VIEW

Front view

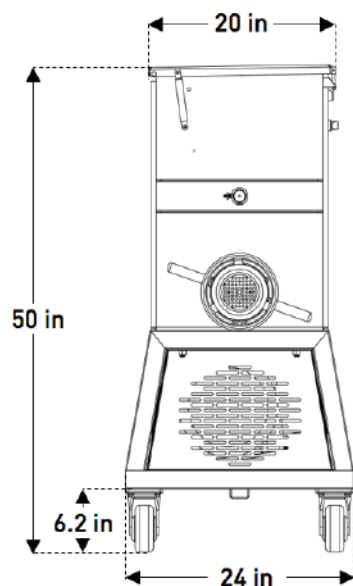

Side view

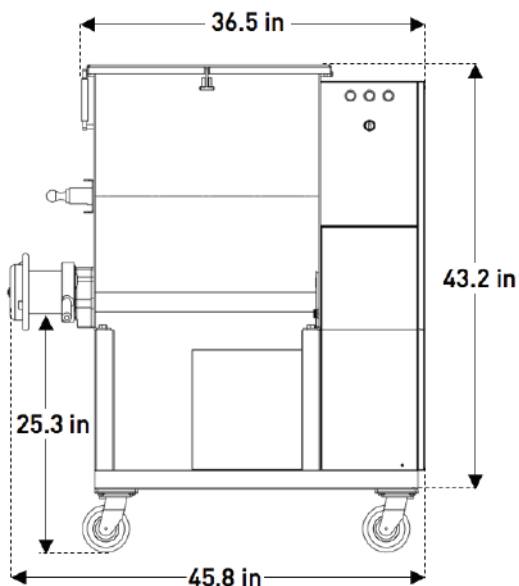

TECHNICAL DATA



L19-30P

Dimensions

External dimensions (in)	L: 45.8" W: 24" H: 50"
Net weight	667 lb (302.55 kg)
Power cord length	6.56 ft

Construction

Body	Stainless Steel
Headstock	Stainless Steel

Logistic data

Max number of SKU per pallet	1
Shipping dimensions per unit	L: 51.5" W: 29" H: 59.5"
Shipping weight per unit	667 lbs
Shipping dimensions full pallet	L: 51.5" W: 29" H: 59.5"
Shipping weight full pallet	667 lbs
Freight class	85

Electrical data

Motor	7.5 HP
Volts / Frequency	220 Vac / 60 Hz
Amps	21.4
Watts	5700
Phase	3
Type of plug (NEMA)	L19-30P

Performance / Capacity

1st grinding capacity (3/8" plate)	66 lbs / min
2nd grinding capacity (1/8" plate)	50 lbs / min

Accessories

Knives	Plates
NIR-32 (Stainless Steel Rectangular)	CD-32-1/8"
NLV-32 (Long Lasting Steel)	CD-32-1/8-29"
	CD-32-1/4"
	CD-32-3/16"
	CDH-32-3/16"
	CD-32-3/8"

L: Length W: Width H: Height