




Recovery & Recycle System

Water Treatment Systems

Making a positive impact on our environment for today and future generations.

PWR Series

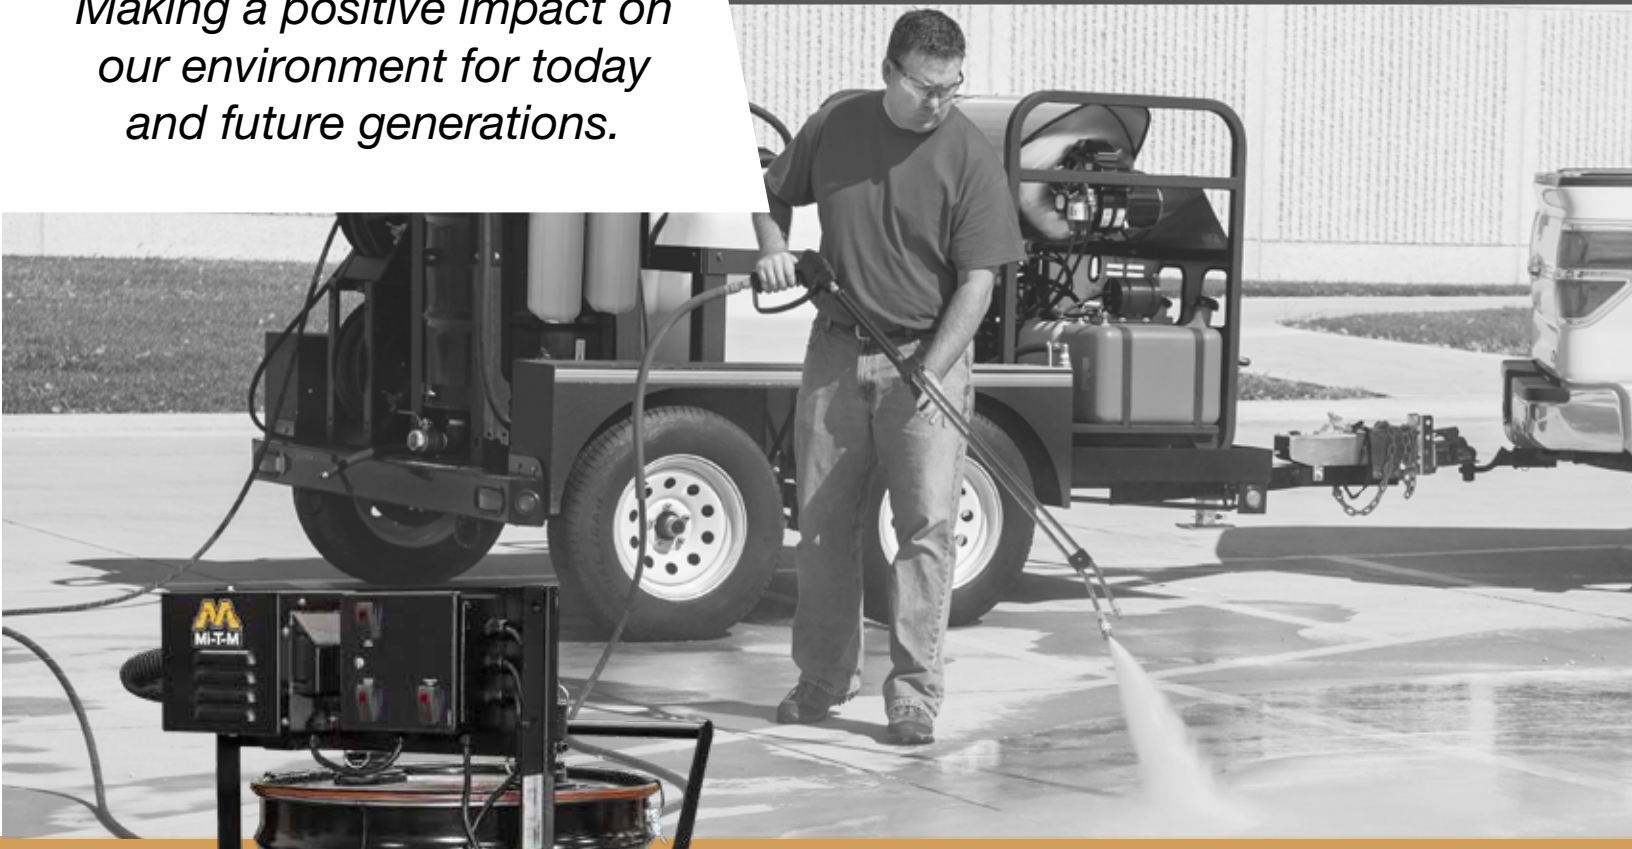

PWR Series

Recovery & Recycle System



THE PORTABLE WATER RECOVERY SERIES
ALLOWS FOR WATER COLLECTION AND
RECYCLING WHILE CLEANING REMOTELY.
IT EFFICIENTLY CAPTURES AND RECLAIMS WASH
WATER FOR REUSE OR PROPER DISPOSAL.



NEMA 5-20P,
20-amp plug

The PWR Series allows wash water to be captured with the water berm to stop it from flowing down a drain or away from the area. The water is drawn into a holding chamber and pumped through optional filters before returning to the holding tank for reuse or proper disposal.

FEATURES

- 1/3 HP transfer pump
- Oil absorbing boom/stick
- Vacuum tank drain
- 3-stage vacuum motor
- Stainless-steel suction head
- Cam lock fittings
- 50-foot vacuum hose
- 55-gallon tank capacity
- 20-foot water berm



PWR-10-OME1 shown with dual filter option, WX-0109 and wheel kit option, WX-0106



Filter wrench will assist in removing and attaching the filter housing for required maintenance of filter cartridge (included with PWR Series manual pack)

MODEL NUMBER	VACUUM MOTOR	TANK CAPACITY	FILTER PUMP	WATER BERM	DIMENSIONS (LxWxH)	SHIP WT.	NET WT.
PWR-10-OME1	3-stage, 1500W, 12.5A full load	55-gallons	1/3 HP, 120V, 1Ø, 8.0A, 60Hz	6in.x20ft.	48x42x60in.	340 lb.	290 lb.

ACCESSORIES:

PART NUMBER	DESCRIPTION
19-0216	30-micron poly filter – 20-inch, pleated
19-0302	10-micron cartridge filter – 20-inch
21-0306	Stainless-steel suction head
33-0520	Water berm – 6-inch x 20-foot
33-0529	Oil absorbing boom – Oil sock for inside of tank
855-0057	50-foot x 1 1/2-inch vacuum hose – Can have up to 100-foot of extension hose

OPTIONS:

PART NUMBER	DESCRIPTION
TX-0010	Adjustable trailer coupler hitch, 2-inch – Replaces the standard 2-inch ball hitch with a 2-inch trailer hitch with pin-style fastener trailer coupler and hinged ball socket; for AW-9000-0010 trailer package
TX-0019	Lunette ring hitch, 3-inch – Replaces the standard 2-inch ball hitch with a 3-inch integrated lunette ring for use with pintle hitches; for AW-9000-0010 trailer package
WX-0106	Wheel kit – Includes two flat-free tires, powder coated steel frame and handle
WX-0109	Dual filters – Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters.
WX-0129	Dual filters for PWR-10-OME1 trailer-mount package – Uses 30-micron filter #19-0216 and 10-micron filter #19-0302. Includes one set of filters installed in housings and one set of replacement filters

PWR Series

Portable Water Recovery Trailer Packages

PWR SERIES TRAILER PACKAGES INCLUDE:

- Portable water recovery trailer, AW-9000-0010
- PWR-10-0ME1 with WX-0129 option
- Hot water pressure washer – Choose from HVS-3505-1H6G or HDS-3505-1H6G

Portable Water Recovery Trailer, AW-9000-0010

- 5-foot x 8½-foot dual-axle trailer
- 200-gallon water tank enclosed in powder coated steel frame
- Swivel jack with stand
- Rubber mounted sealed lights
- 50-foot inlet garden hose with hose reel
- 100-foot high pressure hose with hose reel
- Tank feed for pressure washer
- Option to directly feed water from inlet hose reel

PWR-10-0ME1 with WX-0129 Option for Trailer

Includes all standard PWR Series features, as well as:

- Mounts to AW-9000-0010 trailer
- 2 cartridge filters – 30 and 10-micron; includes one set of replacement filters. Other sizes are available, consult dealer.
- Automatic discharge to outlet valve for reuse or discharge

Hot Water Pressure Washer, HVS-3505-1H6G with HX-0252 Option for Trailer

- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- Powder coated steel coil wrap and control panel
- Trailer tank feed
- 80-mesh inlet Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult dealer for additional options available for the HVS-3505-1H6G

Hot Water Pressure Washer, HDS-3505-1H6G with HX-0253 Option for Trailer

- 3500 PSI @ 4.2 GPM
- GX630 Honda OHV gasoline engine
- Belt drive triplex piston clutch driven General pump
- Heavy-duty powder coated steel square tube skid frame
- Stainless-steel coil wrap and control panel
- Trailer tank feed
- 80-mesh inlet Y-strainer
- Generator wired for burner and PWR-10-0ME1 with dual filters option, WX-0129
- Consult dealer for additional options available for the HDS-3505-1H6G



PWR Series Trailer Package

PWR Series

Application



50 Mi-T-M Drive | Peosta, IA 52068
(800) 553-9053 | www.mitm.com