

# DUAL TEMPERATURE WINE DISPENSER



PRO-LINE™ WINE E-SERIES™ 59" - 8 KEG / 8 FAUCET

- Designed by wine-industry experts for performance and value
- Two dedicated temperature zones for optimal wine dispensing
- Two Sommelier wine fonts with 4 faucets each, drip trays included
- Commercial grade construction - built to last



**MDD58W-E-E**

Black



**Dual-Temperature:** Built In Digital Thermostats



Listed by Edison Testing Laboratories.  
Conforms to UL & NSF Standards.



Wine Certified

Tap handles not included  
Tapping hardware not included

[www.micromatic.com](http://www.micromatic.com) • 1 (866) 327-4159

PRO-LINE™ WINE E-SERIES™ 59" - 8 KEG

Job Number: \_\_\_\_\_ Location: \_\_\_\_\_


| Part No.                                                                                     | Finish | Faucets | Doors | Shipping Weight |
|----------------------------------------------------------------------------------------------|--------|---------|-------|-----------------|
|  MDD58W-E-E | Black  | 8       | 2     | 145 kg          |
|                                                                                              |        |         |       | 318 lb          |

## Operating Performance

|                                 |                                    |              |            |
|---------------------------------|------------------------------------|--------------|------------|
| Capacity of 20 Liter Kegs       | 8 (4 per zone)                     | Running Amps | 6.5        |
| Cubic Feet (liters)             | TBD                                | Condenser HP | 1/3        |
| Holes for Wine Fonts            | 2                                  | Voltage      | 115/60/1   |
| Hole Diameter                   | 3"                                 | Plug Type    | NEMA-5-15P |
| Color-coded Digital Thermostats | 2 (Blue LED-Whites & Red LED-Reds) | Cord Length  | 8'         |
| Temperature Range - Whites      | 42-48° F (5.5 - 8.8C)              | Refrigerant  | R-134a     |
| Temperature Tange - Reds        | 55-65° F (12.7 - 18.3C)            | Charge oz    | 9.8        |
| Approval                        | ETL Listed, Energy Star            |              |            |

|             |                                                                                                                                                             |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exterior    | 18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back                                                                    |
| Interior    | 20 gauge stainless steel floor and walls                                                                                                                    |
| Ventilation | Front ventilated                                                                                                                                            |
| Plumbing    | Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing |
| Insulation  | Foamed-in-place using high density, CFC-free polyurethane; 2" top, walls and floor                                                                          |
| Accessories | Castors or 6" fixed legs                                                                                                                                    |

## Dimensions

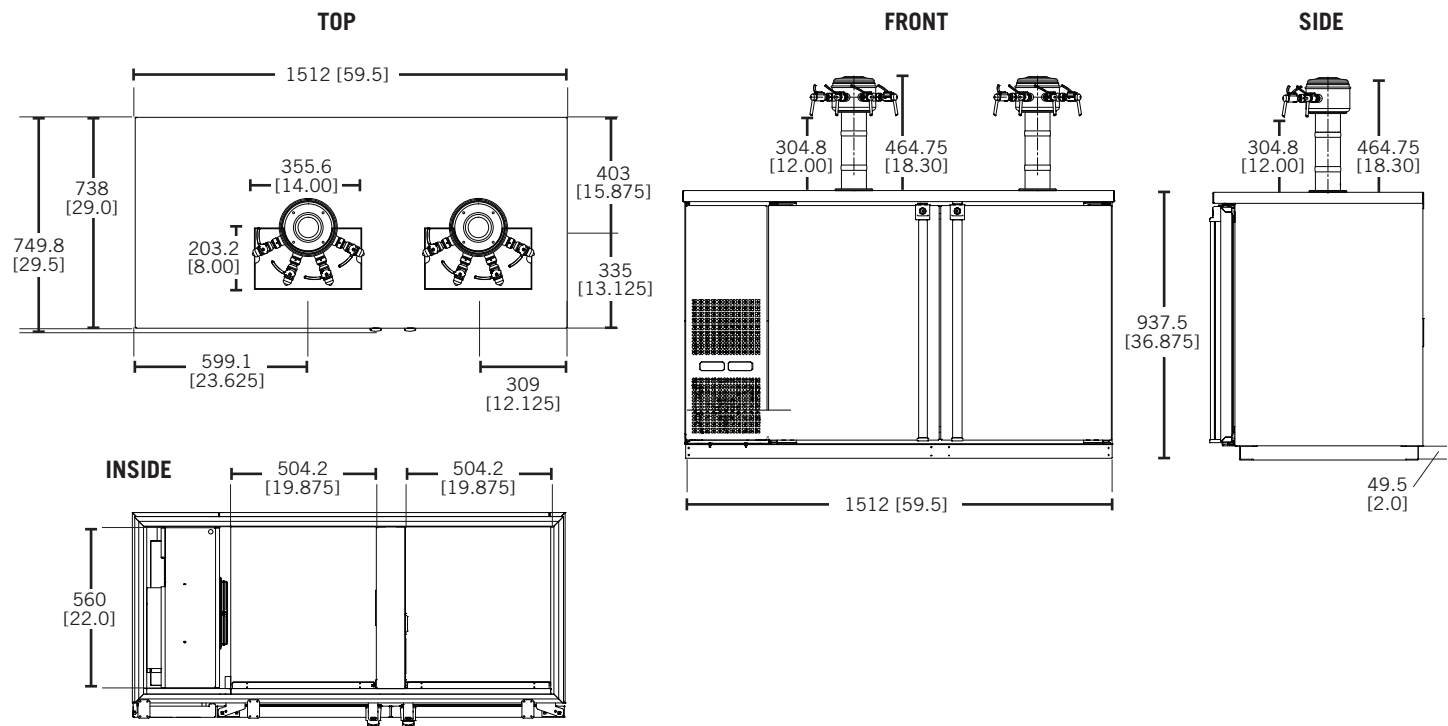

**MICRO MATIC**  
 Toll-Free: 1-866-327-4159  
[www.micromatic.com](http://www.micromatic.com)

**West**  
 17991 Bahama St.  
 Northridge, CA 91324  
 Tel. (818) 701-9765  
 Fax. (818) 701-9844

**Central**  
 10726 North Second St.  
 Machesney Park, IL 61115  
 Tel. (815) 968-7557  
 Fax. (815) 968-0363

**Southeast**  
 2386 Simon Ct.  
 Brooksville, FL 34604  
 Tel. (352) 799-6331  
 Fax. (352) 796-2429

**Northeast**  
 4601 Saucon Creek Rd.  
 Center Valley, PA 18034  
 Tel. (610) 625-4464  
 Fax. (610) 625-4466