



Regency Wall-Mount Hand Sink Faucet with 6" Swivel Gooseneck Spout

#600FWO6



Technical Data

Spout Length	6 Inches
Faucet Width	2 Inches
Faucet Height	9 3/16 Inches
Cartridge Type	Compression
Faucet Centers	Single
Features	BPI Certified Kosher NSF Certified NSF/ANSI 372 NSF/ANSI 61

Features

- 6" long x 9 13/16" tall swivel gooseneck spout, 2 GPM flow rate
- Single hole 1/2" NPS female inlet
- Wall-mounted base, attractive chrome-plated brass construction
- 140 degree maximum water temperature
- For use with knee or pedal valves (sold separately)

Certifications

 1/2" Water Connection


 CSA, US and Canada

 Certified by NSF

Technical Data

Finish	Chrome
Flow Rate	2 GPM
Material	Brass
Mounting Style	Wall Mounted
Plug Type	NEMA L6-30P
Rough In	Single
Spout Clearance	5 5/16 Inches
Spout Type	Gooseneck
Temperature Rating	140 Degrees F
Thread Type	NPS
Type	Goosenecks Mechanical Parts Wall Mount Spout
Valve Type	No Valve
Water Inlet Size	1/2 Inches

Plan View

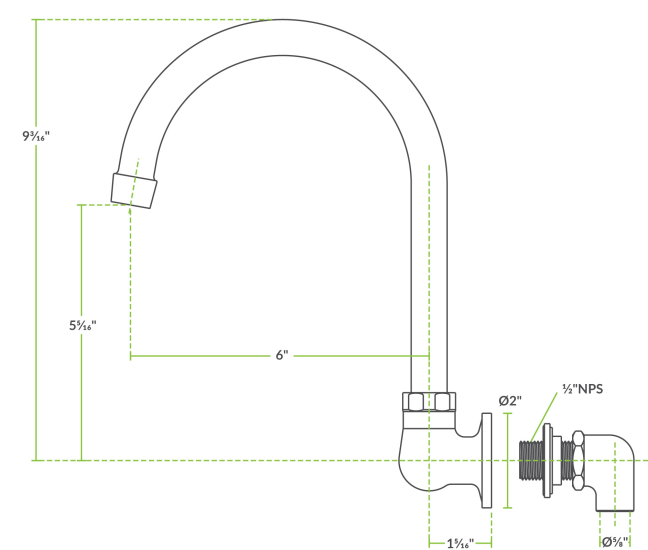

Notes & Details

This Regency wall-mount hand sink faucet with 6" swivel gooseneck spout is an excellent choice when you need a reliable, affordable water fixture for your facility! Designed to be simple to install and maintain, this spout is great for use with knee or pedal valves (sold separately). Thanks to a 6" long swivel gooseneck spout with a single-hole 1/2" NPS female inlet, this faucet delivers water exactly where you need it.

Water exits the faucet with a 2 GPM flow rate, which creates a soft flow pattern with minimal splashing. The faucet installs on your wall and connects to the facility water lines with a 1/2" NPS female inlet. The faucet body is made from chrome-plated brass that complements nearly any design aesthetic. An installation kit is required for setup (sold separately).

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.