



Regency 30 lb. 15 GPM Grease Trap with 2" Non-Threaded Connections - Non-PDI Certified

#600GTNC15



Technical Data

Length	23 1/8 Inches
Width	17 1/8 Inches
Height	14 3/4 Inches
Capacity	30 lb.
Connection Type	Non-Threaded
Features	Flow Control
Flow Rate	15 GPM
Handle	With Handle


Features

- 15 GPM; 30 lb. capacity
- Includes external flow control fitting
- 2" non-threaded connections
- Steel construction with removable baffle
- Dual handles help to pull the lid off

Technical Data

Inlet / Outlet Size	2 Inches
Material	Steel
Type	Grease Traps

Plan View

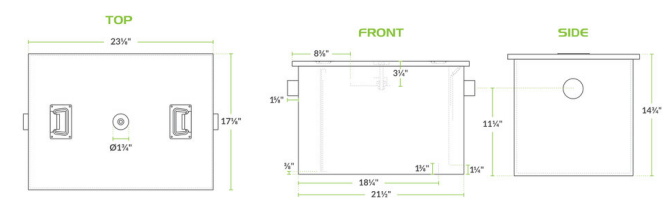

Notes & Details

Use this Regency 15 GPM 30 lb. grease trap to keep your restaurant code-compliant and make it easy to remove harmful, greasy substances from drainage lines! The greasy byproducts that go down the drain of prep sinks, pot sinks, and commercial dishwashers are difficult to process and can cause environmental issues if they enter the sewer, septic field, or a nearby wastewater treatment facility. Local plumbing codes may require a grease trap on these and other appliances to prevent this from happening.

This trap has a grease capacity of 30 lb. and a flow rate of 15 GPM, with external flow control fitting and 2" non-threaded inlet / outlet connections to install it on your drain lines. Its steel construction and removable baffle make cleanout easy. The lid features two convenient pull handles to make accessing the trap interior easier. This grease trap is not PDI certified.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.