

2-Person Hands-Free Floor Mount Stainless Steel Wash Station

Model	Flow-Rate
54FK1	Standard 2.0 GPM
54FK1.5	Low-Flow 0.5 GPM

Product Specifications

Constructed from welded #16 gauge type 304 stainless steel. The front, bottom and back are formed from a single sheet with a rolled rim on front and sides. Exposed surfaces have a blended uniform satin finish. Specially designed knee valves provide easy access to working parts without disconnecting mount or plumbing.

Outside Dimensions	40" x 20" x 45" High
Inside Bowl Size	37" x 16-1/2" x 8" Deep
Back Splash Height	10"
Water Activation	Single Knee Pedal Valve
Flow Rate	2 GPM
Inlet Connections	3/8" Male Compression
Drain Opening	2"
Finish	Satin
Strainer	1-1/2" Dia. Duo Basket Strainer

Includes

- (1) Floor mount wash station
- (1) Leg assembly set
- (4) Washers and nuts for connection sink to leg assembly set
- (2) Single knee pedal valve (bottom mount) with 4 nuts
- (2) Swivel gooseneck spout with aerator
- (2) Connecting tube for valve to spout connection
- (4) Fittings, brass, 0.375" male compression and 0.375" male NPT
- (2) Mixing check valve
- (1) Strainer assembly with basket

Product Compliance

NSF/ANSI 2 Food Equipment
NSF/ANSI 372 Low-Lead



Part: _____ Quantity: _____

Project: _____

Contact: _____

Date: _____

Approval: _____


Notes:




WARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.

2-Person Hands-Free Floor Mount Stainless Steel Wash Station
Models 54FK1 and 54FK1.5


Top

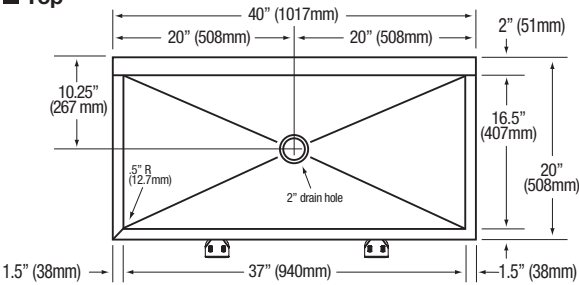


Front

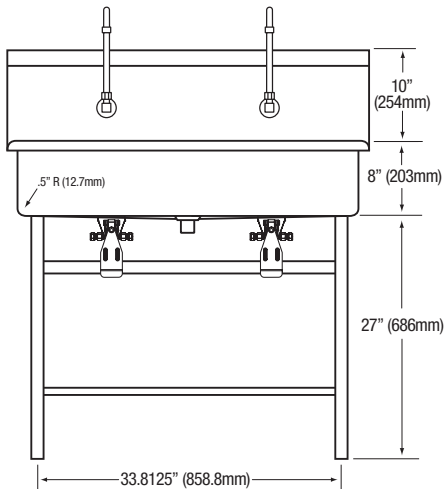


Side

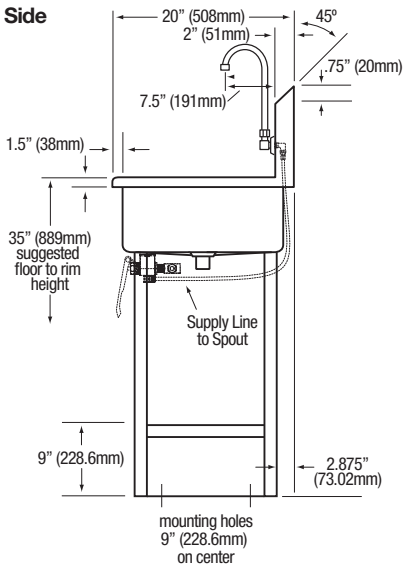

Hole Configurations

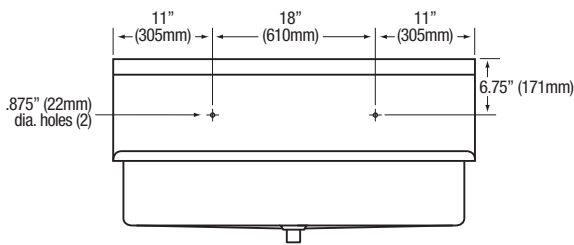

Floor Mounting Detail



Supply Line Detail

