


Size (inch) Nominal W x H x D	Size (inch) Actual W x H	Koch Part Number	Initial Resistance (Inch W.G.)		Capacity (CFM) 500 FPM	Media Area (Sq. Ft.) (APPROX.)
			300 FPM	500 FPM		
24 x 24 x 15	23.5 x 23.5 x 15	104-500-001	.05	.11	2000	14.7
12 x 24 x 15	11.5 x 23.5 x 15	104-500-002	.05	.11	1000	12.2
16 x 20 x 15	15.5 x 19.5 x 15	104-500-003	.05	.11	1100	11.4
20 x 20 x 15	19.5 x 19.5 x 15	104-500-005	.05	.11	1400	12.2
20 x 25 x 15	19.5 x 24.5 x 15	104-500-006	.05	.11	1750	14.3

Standard Construction

1. High Loft Polyester Media (Green / White)
2. Internal 9 gage wire frame
3. Sewn pocket construction
4. Wire Orientation based on number of pockets required
5. Optional 1" nominal size headers available

Specifications:

1. MERV 6 (ASHRAE Standard 52.2-2017)
2. Maximum operating temperatures 180 degrees Fahrenheit and 82 degrees Celsius
3. Final Resistance: 1.0" W.G.
4. UL Classified per UL Standard 900

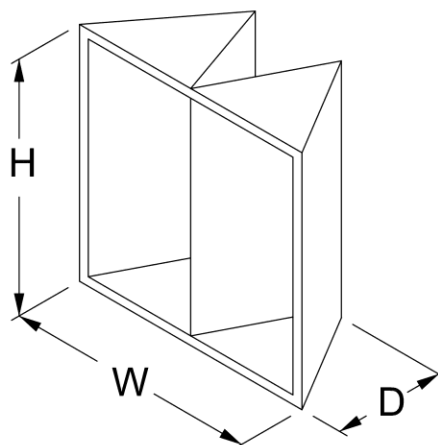

Koch Filter Corporation
 Filtration Products Crafted with Pride
 8401 Air Commerce Drive - Louisville KY 40219
 Phone: (502) 634-4796 FAX: (502) 637-2280

**Duo-Pak
 SprayStop-S
 (Self-Seal)**

Drawn By: **Dave Miller**

Date: **12 December, 2018**

Revision

0