


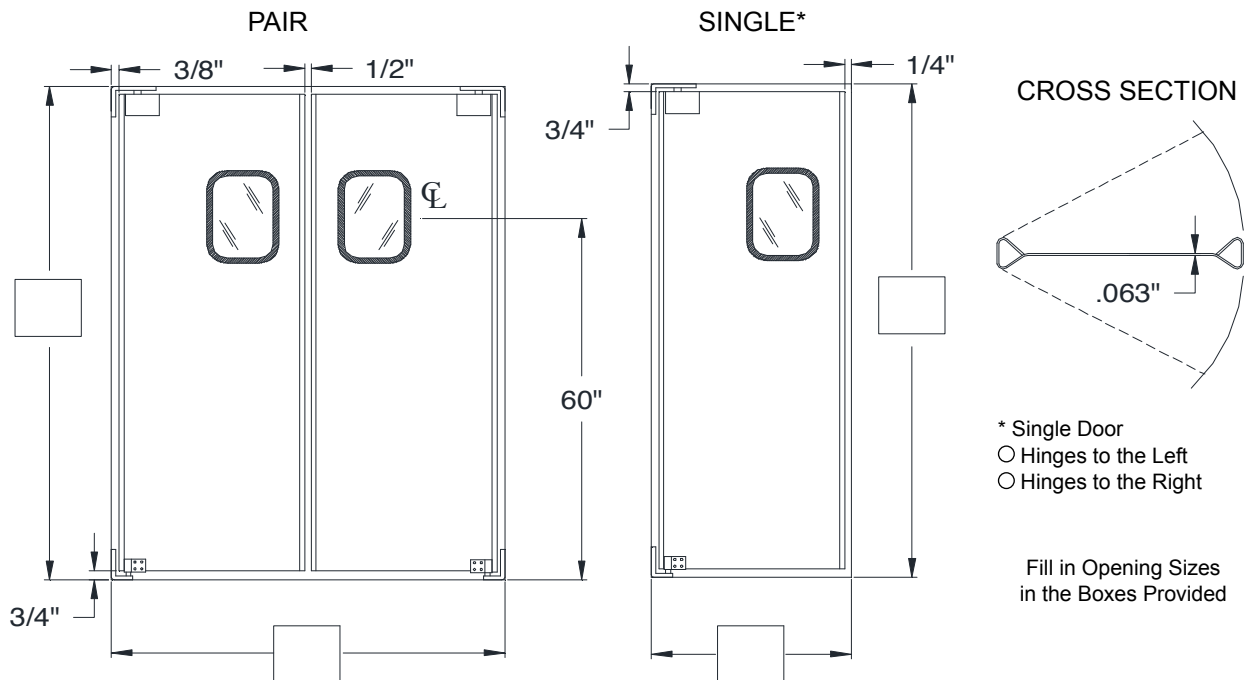

STANDARD SPECIFICATIONS: Door body .063" tempered aluminum alloy, satin anodized finish. 9" x 14" clear acrylic safety window set in black rubber molding. Door assembly includes Save-T hinges and both 1/4" - 20 x 1" thread cutting screws and #14 -1-1/2" sheet metal/wood screws for jamb by others. **OPTIONAL:** 16-Gauge Stainless Steel door body.

INSTALLATION DETAILS: Jams must be plumb and square. Minimum double 2 x 4 inch wood construction or equivalent. Hollow metal jams should be reinforced at hinge locations.