



## VC55E SERIES

### Double Deck Electric Convection Oven



Model VC55ED

Shown on optional casters



### SPECIFIER STATEMENT

Double section, electric convection oven, Vulcan Model No. (VC55ED). Stainless steel front, sides, top and legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interiors measure 29"w x 22 $\frac{1}{8}$ "d x 20"h. Two interior oven lights per section. Five nickel plated oven racks per section measure 28 $\frac{3}{4}$ " x 20 $\frac{1}{2}$ ". Eleven position nickel plated rack guides with positive rack stops per section. Each section heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed  $\frac{1}{2}$  H.P. oven blower-motor per section. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

#### Exterior Dimensions:

40 $\frac{1}{4}$ "w x 40"d (includes motor & door handles)

37 $\frac{3}{4}$ "d (includes motor only) x 70"h on 8" legs.

NSF listed. UL listed.

Project \_\_\_\_\_

AIA # \_\_\_\_\_ SIS # \_\_\_\_\_

Item # \_\_\_\_\_ Quantity \_\_\_\_\_ C.S.I. Section 114000

### MODEL

- ☐ **VC55ED** Solid state temperature dial controls adjust from 150° to 500°F with digital display enhancement. 5-hour timer with audible alarm.

### STANDARD FEATURES

- Independently operated removable stainless steel doors with double pane windows
- Gentle Bake mode selector switch
- On-board diagnostics for easy servicing
- Five nickel plated grab-and-go oven racks with eleven rack positions per section
- Stainless steel front, sides, top and legs
- 25 total KW
- $\frac{1}{2}$  H.P. two speed oven blower-motor
- Moisture vent
- Oven cool switch for rapid cool down
- Porcelain enamel on steel oven interiors
- One year limited parts and labor warranty

### OPTIONS

- ☐ Casters
- ☐ 480V/60 Hz/1 or 3 phase
- ☐ Second year extended limited parts and labor warranty

### ACCESSORIES (PACKAGED AND SOLD SEPARATELY)

- ☐ Stainless steel rear motor enclosure
- ☐ Extra oven rack(s)
- ☐ Rack hanger(s)
- ☐ Stainless steel drip pan
- ☐ Down draft flue diverter for direct vent connection

VC55E SERIES – Double Deck Electric Convection Oven

Approved by \_\_\_\_\_ Date \_\_\_\_\_ Approved by \_\_\_\_\_ Date \_\_\_\_\_



#### OPTIONAL VOLTAGES

□ 480 volt, 60 Hz, 3 phase

#### CLEARANCES

|            | Combustible | Non-Combustible |
|------------|-------------|-----------------|
| Rear       | 2"          | 2"              |
| Right Side | 4"          | 4"              |
| Left Side  | 1"          | 1"              |

INSTALLATION MANUAL

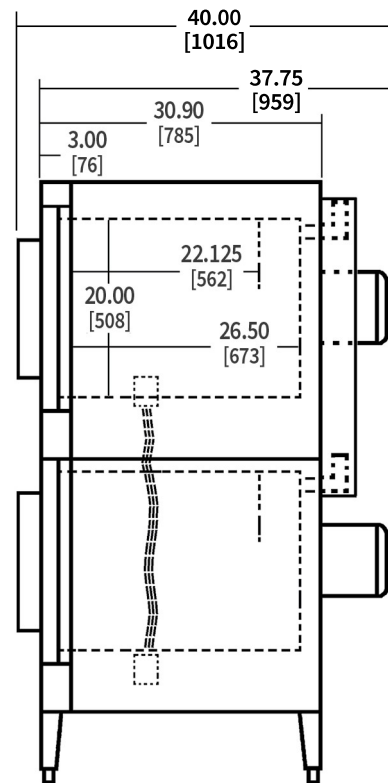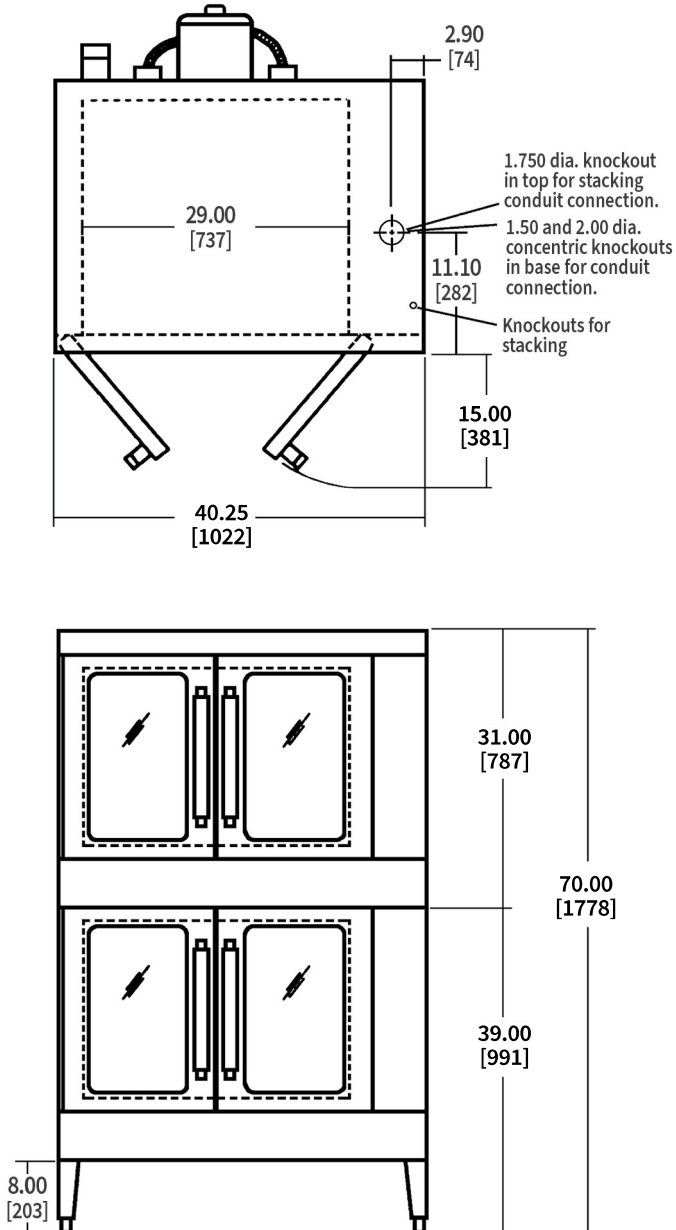

CAD and/or Revit Files Available

| Model | Total Conn. KW | 3 Phase Load KW per Phase |     |     | Nominal Amps per Line Wire |    |    |          |    |    |          |    |    | 1 Phase |      | Weight                |     |                          |     |
|-------|----------------|---------------------------|-----|-----|----------------------------|----|----|----------|----|----|----------|----|----|---------|------|-----------------------|-----|--------------------------|-----|
|       |                |                           |     |     | 3 Phase                    |    |    |          |    |    |          |    |    |         |      | With Skid & Packaging |     | Without Skid & Packaging |     |
|       |                |                           |     |     | 208 Volt                   |    |    | 240 Volt |    |    | 480 Volt |    |    |         |      |                       |     |                          |     |
|       |                | X-Y                       | Y-Z | X-Z | X                          | Y  | Z  | X        | Y  | Z  | X        | Y  | Z  | 208V    | 240V | Lbs.                  | KG  | Lbs.                     | KG  |
| VC55E | 25             | 8                         | 8   | 9   | 70                         | 66 | 70 | 66       | 58 | 66 | 28       | 30 | 30 | 120     | 104  | 880                   | 400 | 778                      | 352 |

As continued product improvement is a policy of Vulcan, specifications are subject to change without notice.