





## Waterloo Deck-Mounted Faucet with 4" Centers and 12" Swing Spout

#750FD412

Item #: 750FD412 Qty: \_\_\_\_\_

Project: \_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_



### Features

- 12" swing spout with 2 GPM aerator
- 4" adjustable centers, 1/2" NPT inlets
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridges with check valves

### Certifications



CSA, US and Canada



Certified by NSF





1/2" Water Connection

### Technical Data

|                |              |
|----------------|--------------|
| Spout Length   | 12 Inches    |
| Faucet Height  | 7 3/4 Inches |
| Cartridge Type | Ceramic      |
| Faucet Centers | 4 Inches     |
| Finish         | Chrome       |
| Flow Rate      | 2 GPM        |
| Handle Type    | Lever        |
| Material       | Brass        |
| Mounting Style | Deck Mounted |
| Mounting Type  | Adjustable   |

| Technical Data        |                    |
|-----------------------|--------------------|
| Rough In              | 4 Inches           |
| Spout Clearance       | 5 1/2 Inches       |
| Spout Connection Size | 1"-20 UNEF         |
| Spout Type            | Swing              |
| Sprayer               | Without Sprayer    |
| Temperature Rating    | 40 - 180 Degrees F |
| Thread Type           | NPT                |
| Type                  | Faucets            |
| Water Inlet Size      | 1/2 Inches         |

## Plan View

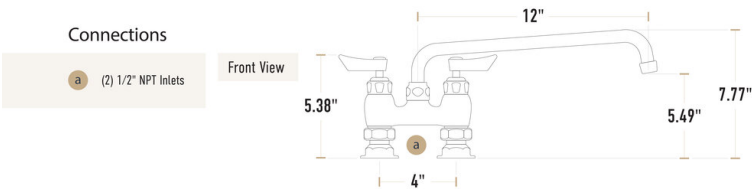

## Notes & Details



This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 4" adjustable centers, while the deck-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.


**WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).