



Waterloo Wall-Mounted Faucet with 8" Centers, 12" Swing Spout, and Wrist Handles

#750FW812WHK

Item #: 750FW812WHK Qty: _____
 Project: _____
 Approval: _____ Date: _____



Features

- 12" swing spout with 2 GPM aerator
- 8" adjustable centers, 1/2 NPT inlets
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction; includes wrist handles
- Leak-resistant 1/4 turn ceramic cartridges with check valves

Certifications



1/2" Water Connection



CSA, US and Canada



Certified by NSF

Technical Data

Spout Length	12 Inches
Faucet Height	5.630000114440918 Inches
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Features	BPI Certified Kosher NSF Certified
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Wrist



Technical Data

Material	Brass
Mounting Style	Wall Mounted
Mounting Type	Bridge
Plug Type	NEMA L6-30P
Rough In	8 Inches
Spout Clearance	3.309999942779541 Inches
Spout Connection Size	1"-20 UNEF
Spout Type	Swing
Temperature Rating	40 - 180 Degrees F
Thread Type	NPT
Type	Faucets
Water Inlet Size	1/2 Inches

Plan View

Connections

(2) 1/2" NPT Inlets

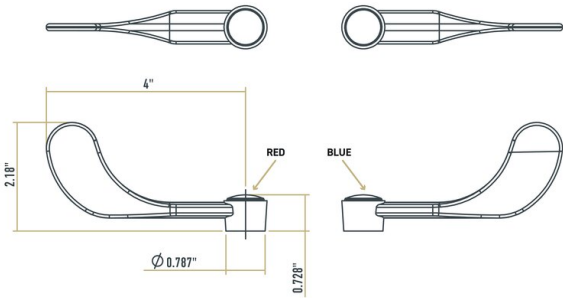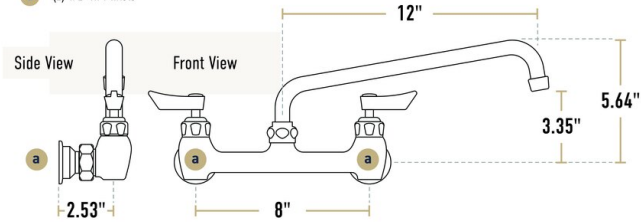

Notes & Details

This Waterloo wall-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features a 12" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 8" adjustable centers that allow it to match the centers on your sink or mounting surface with ease. The deck-mounted design is easy to install, and it uses 1/2" NPT inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet.

This type of handle lets employees turn the water on or off by using the wrist rather than the fingers, reducing the transfer of germs for increased sanitation.

 **WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.