




Waterloo Wall-Mounted Faucet with 8" Centers and 8" Swing Spout

#750FW88

Item #: 750FW88 Qty: _____

Project: _____

Approval: _____ Date: _____



Features

- 8" swing spout with 2 GPM aerator
- 8" adjustable centers, 1/2" NPT inlets
- Temperature rating 40 - 180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant 1/4 turn ceramic cartridges with check valves

Certifications



Certified by NSF



CSA, US and Canada




1/2" Water Connection

Technical Data

Spout Length	8 Inches
Faucet Height	5 Inches
Cartridge Type	Ceramic
Faucet Centers	8 Inches
Features	BPI Certified Kosher NSF Certified
Finish	Chrome
Flow Rate	2 GPM
Handle Type	Lever


Technical Data	
Material	Brass
Mounting Style	Wall Mounted
Mounting Type	Bridge
Plug Type	NEMA L6-30P
Rough In	8 Inches
Spout Clearance	3 Inches
Spout Connection Size	1"-20 UNEF
Spout Type	Swing
Temperature Rating	40 - 180 Degrees F
Thread Type	NPT
Type	Faucets
Water Inlet Size	1/2 Inches

Plan View




Connections

a (2) 1/2" NPT Inlets

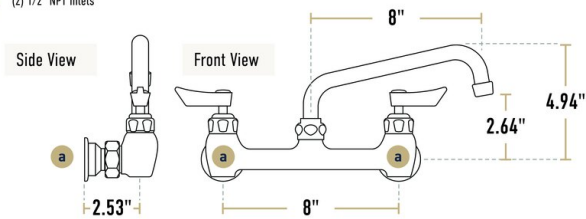

Notes & Details



This Waterloo wall-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence. And to give you total peace of mind, it comes with a 3-year replacement warranty.

This faucet features an 8" long swing spout that moves easily around the sink bowl, while a 2 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 8" adjustable centers, while the wall-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.