

U.S. Range

Regal Series Infra-Red Cheesemelter

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Regal Series Infra-Red Cheesemelter

Models

- IRCMA-24
- IRCMA-36
- IRCMA-48
- IRCMA-60
- IRCMA-72



Model shown IRCMA-48

Standard Features

- Standard Features:
- Infrared gas burners
- One control valve per burner, see back of specification for number of burners for each unit.
- Constant pilot for instant lighting
- Stainless steel top, front, and sides.
- Stainless steel cooking interior sides, back and bottom.
- Removable, chrome-plated wire rack
- Fiberglass insulated sides, bottom, and back
- 24" (610mm) to 72" (1829mm) widths available
- Wall and counter top models available
- 3/4" N.P.T. top gas inlet connection.
- One year parts and labor

Options & Accessories

- Wall mount kit

Specifications

U.S. Range Regal Series Cheesemelter wall or counter-mounted.

Available in widths from 24" (610mm) to 72" (1829mm) x 17 5/8" (448mm) deep x 18 3/4" (476mm) high.

Stainless steel front, sides and top.

Removable chrome-plated round rack.

Shelves are removable, round-stock chrome-plated.



Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA


General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6974A
05/25



U.S. Range

Regal Series Infra-Red Cheesemelter

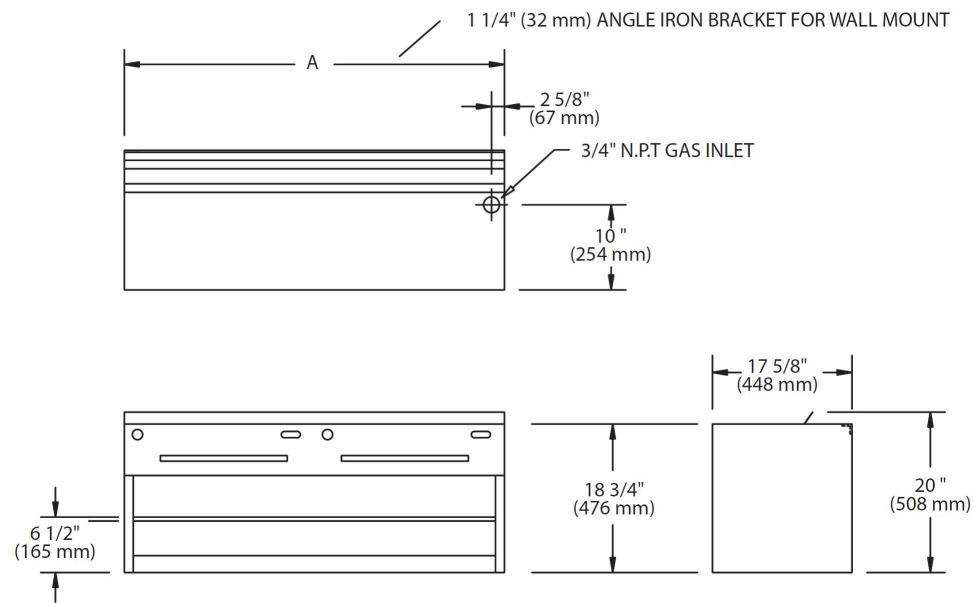

Many local codes exist and it is the responsibility of the owner and installer to comply with those codes.

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only.

Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications

Models #	Dimensions: In. (mm)			Number of Burners	Total BTU*	Weight: Lb/Kg	Cu. Ft.
	Width (A)	Depth	Height				
IRCMA-24	24 (610)	17-5/8 (447)	18-3/4 (476)	1	20,000	145/66	9
IRCMA-36	36 (914)	17-5/8 (447)	18-3/4 (476)	1	30,000	185/84	13
IRCMA-48	48 (1219)	17-5/8 (447)	18-3/4 (476)	2	40,000	230/105	17
IRCMA-60	60 (1524)	17-5/8 (447)	18-3/4 (476)	2	50,000	265/120	21
IRCMA-72	72 (1829)	17-5/8 (447)	18-3/4 (476)	3	60,000	300/136	25

* Natural Gas and Propane

Manifold Operating Pressure All Models			
Natural Gas		Propane	
"WC	Mbar	"WC	Mbar
5	12.5	10	25

Type of Construction Installation Minimum Clearance			
Combustible: in. (mm)		Non-Combustible: in. (mm)	
Rear	3 (76)	Rear	0
Sides	6 (152)	Sides	0
Counter installations base must be a non-combustible.			

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
6974A
05/25

