




SINGLE DECK DUAL CONTROL FAUCET W/ LEVER HANDLES

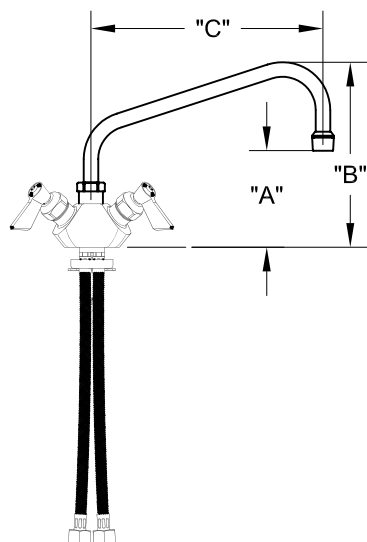


SINGLE DECK DUAL CONTROL FAUCET W/ WRIST HANDLES

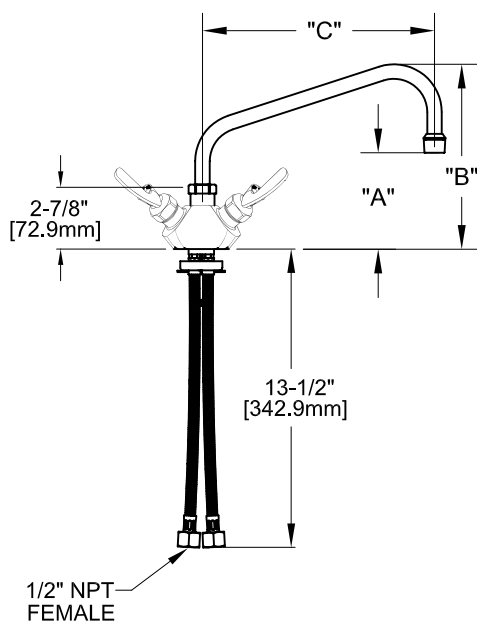

FOOTPRINT:

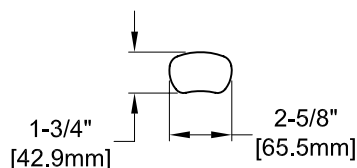

ROUGH-IN:



ANSI/A112.18.1-2005

PRODUCT NAME:
STAINLESS STEEL
SINGLE DECK DUAL CONTROL FAUCET
MODEL:

- ☐ 52760 W/ 6" SWING SPOUT W/ LEVER HANDLES
☐ 52779 W/ 8" SWING SPOUT W/ LEVER HANDLES
☐ 52787 W/ 10" SWING SPOUT W/ LEVER HANDLES
☐ 52795 W/ 12" SWING SPOUT W/ LEVER HANDLES
☐ 52809 W/ 14" SWING SPOUT W/ LEVER HANDLES
☐ 52817 W/ 16" SWING SPOUT W/ LEVER HANDLES
☐ 52766 W/ 6" SWING SPOUT W/ WRIST HANDLES
☐ 52724 W/ 8" SWING SPOUT W/ WRIST HANDLES
☐ 52782 W/ 10" SWING SPOUT W/ WRIST HANDLES
☐ 52790 W/ 12" SWING SPOUT W/ WRIST HANDLES
☐ 57304 W/ 14" SWING SPOUT W/ WRIST HANDLES
☐ 57312 W/ 16" SWING SPOUT W/ WRIST HANDLES

FEATURES**CONTROL VALVE**

- * SINGLE DECK DUAL CONTROL
- * STAINLESS STEEL CONSTRUCTION
- * SWIVELLING SEAT DISKS
- * HOT SIDE STEM - RIGHT HAND
- * COLD SIDE STEM - LEFT HAND
- * LEVER HANDLES OR WRIST HANDLES
- * STAINLESS STEEL BRAIDED HOSE

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX. STATIC
- * PRESSURE 200 PSI MAX.
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

- * 4.75 LBS

* NSF 61-9 APPROVED & LISTED
www.truesdail.com

MODELS	DIM "A"	DIM "B"	DIM "C"
52760 57266	3" [76.2mm]	6-5/8" [168.3mm]	6" [152mm]
52779 57274	3-1/4" [82.6mm]	7-1/8" [181.0mm]	8" [204mm]
52787 57282	3-7/8" [98.4mm]	7-5/8" [193.7mm]	10" [254mm]
52795 57290	4-1/2" [114.3mm]	8-1/8" [206.4mm]	12" [305mm]
52809 57304	5-1/8" [130.2mm]	9" [228.6mm]	14" [356mm]
52817 57312	5" [149.2mm]	9-5/8" [244.5mm]	16" [406mm]

FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238

information@fisher-mfg.com - www.fisher-mfg.com