

Master Series Electric Induction Range with Convection Oven

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

Models

- GME36M-i14C
- GME36M-i20C



Standard Features

- 36" wide electric induction range with convection oven
- All stainless steel chassis, with stainless steel front and sides
- Four (4) 3.5kW or 5kW hobs, with a 5.63kW (208V) or 7.5kW (240V), 3-phase electric convection oven
- 6" (152mm) adjustable legs
- Seamless design, easy-to-clean Ceran® glass cook-tops and stainless steel exterior
- Unique integrated air management system allows for reliable operation
- Flush back for easy installation and cleaning
- Easy-grip and cool-to-the-touch control knobs
- Integrated circuit breaker, for both induction and oven, provides electric circuit protection
- Easy access panel for regular maintenance
- Two (2) years limited parts and labor warranty (USA & Canada)

Garland Induction Cook-Top:

- Large 6mm thick Ceran® cooking glass surface, 28.3" (720mm) wide X 28.3" (720mm) deep
- The revolutionary RTCSmp induction technology monitors the energy supply and temperatures of the electronic components in real-time.

This continuous control yields high performance and efficient cooking.

- Automatic pan detection and boil-dry protection
- Automatic frequency adjustment to various pan compositions for consistent performance
- Simple operation control with 360° rotation, power levels from 1 to 12

Garland Convection Oven:

- Fully insulated stainless steel oven cavity
- Flat convection motor allows for flush mount at the back
- Backward inclined fan blade allows for efficient air flow and quiet operation
- Chrome plated, removable rack guides with three (3) oven racks
- Heat-resistant, stay-cool oven door handle
- Off-Cook-Cool, 3-position convection fan control
- Higher heater power, 3-phase heater

Optional Features

- Deck fasteners, set of four
- Set of four 5" (127mm) polyurethane non-marking swivel casters with front brakes.
- NOTE: Range supplied with casters must be installed with an approved restraining device.

Cook Faster, Smarter & Safer


- Cook faster and more energy-efficiently with Garland Induction RTCSmp
- Built-in quad cooktop with boil-dry protection and faster automatic pan detection.
- Automatic frequency adjustment to various pan compositions for consistent performance.
- Smart engineering design to incorporate Garland induction cooking with Garland's convection oven.
- Variable induction frequency optimizes performance.

NOTE INDUCTION COOKING PAN: Induction cooking equipment requires "Induction Ready" pans to operate. Please consult your equipment supplier.



Master Series Electric Induction Range with Convection Oven

Master Series Electric Induction Range with Convection Oven

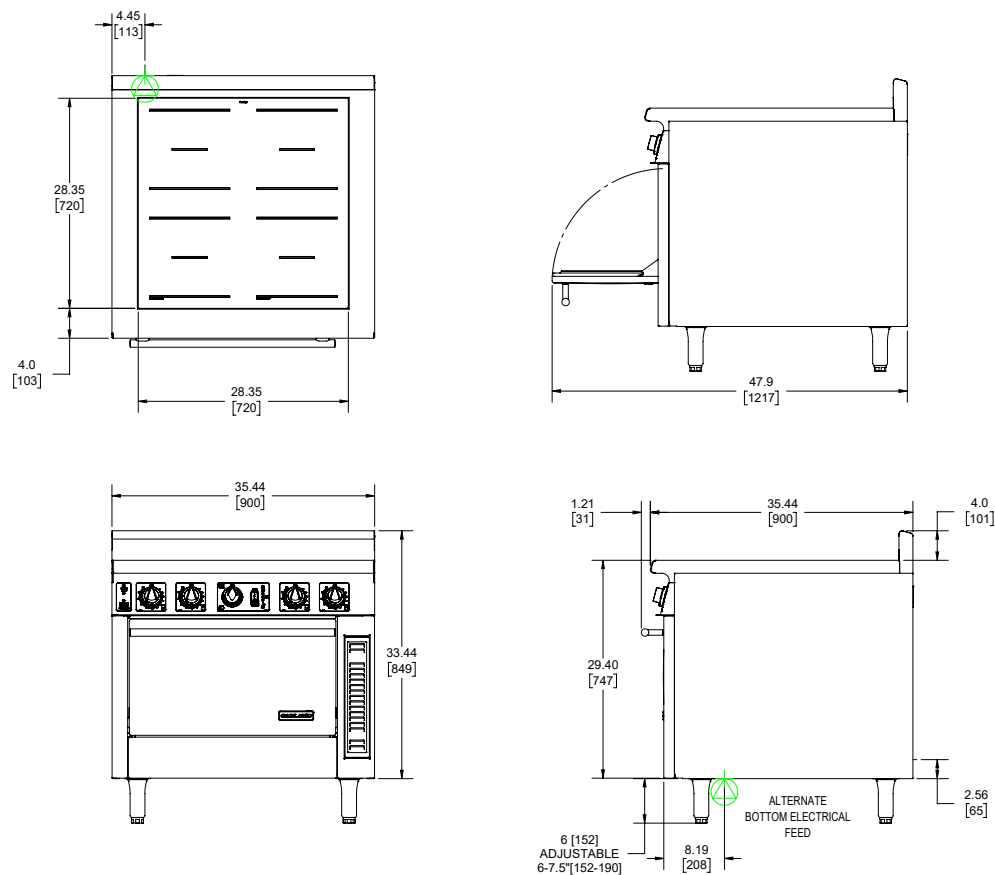

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Electrical Loading						
MODEL	REGION	VOLTAGE 5-wire: 3-phase, neutral, and ground	TOTAL kW	MAXIMUM AMPERAGE (A)		
				X	Y	Z
GME36M-i14C (3.5kW)	North America	120/208V, 3PH, 5W, 50/60Hz	20.4	56.5	56.5	56.5
		120/240V, 3PH, 5W, 50/60Hz	22.2	53.5	53.5	53.5
	Export	220/380V, 3PH, 5W, 50/60Hz	21.0	31.9	31.9	31.9
		230/400V, 3PH, 5W, 50/60Hz	21.6	31.3	31.3	31.3
		240/415V, 3PH, 5W, 50/60Hz	22.2	30.9	30.9	30.9
	Marine Applications	250/440V, 3PH, 5W, 50/60Hz	23.1	30.4	30.4	30.4
GME36M-i20C (5kW)	North America	120/208V, 3PH, 5W, 50/60Hz	26.7	74.1	74.1	74.1
		120/240V, 3PH, 5W, 50/60Hz	26.7	68.7	68.7	68.7
	Export	220/380V, 3PH, 5W, 50/60Hz	27.4	41.5	41.5	41.5
		230/400V, 3PH, 5W, 50/60Hz	27.9	40.4	40.4	40.4
		240/415V, 3PH, 5W, 50/60Hz	28.6	39.7	39.7	39.7
	Marine Applications	250/440V, 3PH, 5W, 50/60Hz	29.5	38.6	38.6	38.6

Garland reserves the right to make changes to the design or specifications without prior notice.

Garland Commercial Ranges Ltd.
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA

General Inquires 1-905-624-0260
USA Sales, Parts and Service 1-800-424-2411
Canadian Sales 1-888-442-7526
Canada or USA Parts/Service 1-800-427-6668

www.garland-group.com
8188
06/25

