


SPECIFICATION:

JOSAM SERIES 41630 FABRICATED STAINLESS STEEL (TYPE 304, 14 GA), 12" SQUARE TOP, 6" DEEP, WITH NO-HUB BOTTOM OUTLET, ANCHOR TABS AND PERFORATED SS GRATE (STANDARD).




SS DRAIN 12" SQUARE TOP, 6" DEEP

SERIES

41630

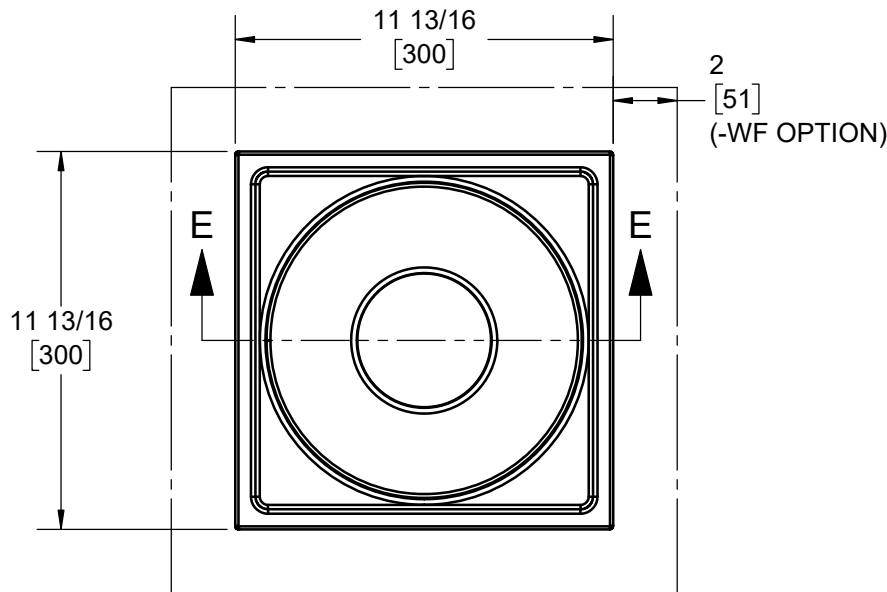

STANDARD GRATE
FREE AREA = 42.3 IN²
MEETS ADA AND HEEL-PROOF REQS.

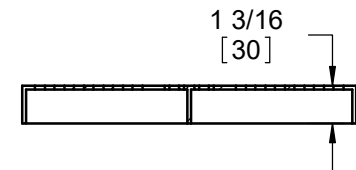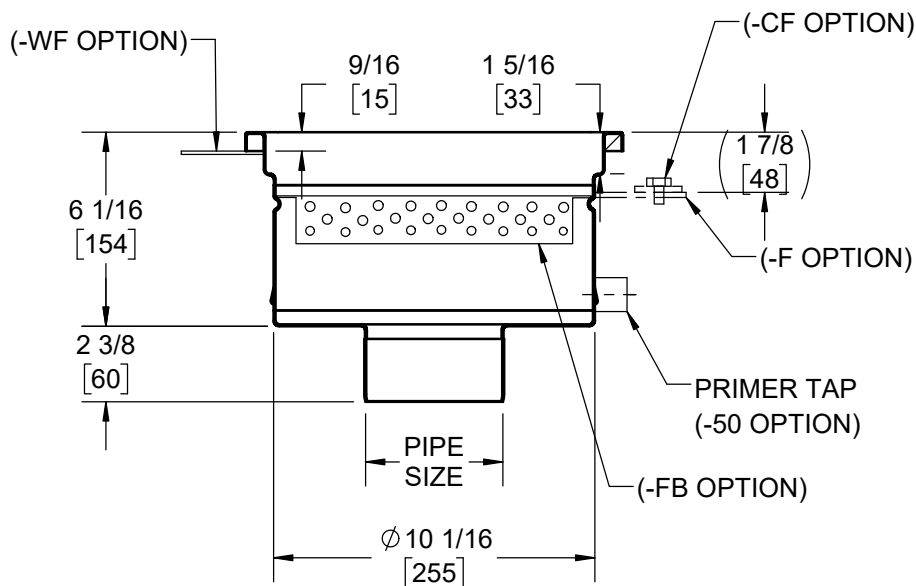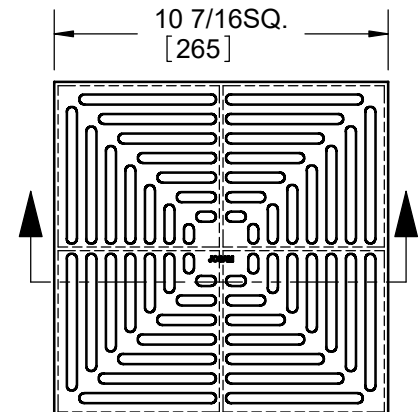

	MODEL	PIPE SIZE
	41633	3"
	41634	4"
	41636	6"

OPTIONS:

	-NB	NICKEL BRONZE RIM & GRATE (*ADD 0.5")
	-FB	FILTER BASKET
	-SB	SEDIMENT BUCKET
	-VP	SECURED GRATE
	-50	1/2" PRIMER TAP
	-BW	BUTT-WELD OUTLET (SPEC. 10, 40, 80)
	-T	THREADED OUTLET
	-PFO	PUSH-FIT OUTLET SIZE
	-DBS	DOME BOTTOM STRAINER

	-WF	2" WIDE FLANGE
	-F	FLANGE
	-CF	CLAMP AND FLANGE
	-NG	NO GRATE
	-HG	PERF. HALF GRATE
	-3Q	PERF. 3/4 GRATE
	-MG	MESH, ANTI-SLIP GRATE
	-LG	LADDER GRATE
	-SG	PERIMETER SLOT GRATE
	-316	TYPE 316L MATERIAL

DATE OF LAST CHANGE: 08/20/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCES AND CHANGE WITHOUT NOTICE. WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES